Power Catalog 151
May 2015

www.Jameco.com
1-800-831-4242

POWER RESOURCE CENTER

Thousands of Power Products to Choose From

JAMECO®
Since 1974
ELECTRONICS

FEATURED PRODUCTS

OWA-90U Series Single Output LED Moistureproof Adapters

Adapters on pages 2-9

These external switching power supplies with an IP67 enclosure rating work well in dry or damp conditions that work as an adapter for your general electronic products and LED lighting fixture needs.

*Web Code: LPP

- Working like an adapter, It simplifies the connection with LED's lighting fixtures without extra wiring efforts
- Built-in active PFC function • 4-pin DIN plug • Universal AC input/full range
- Fanless design, cooling by free air convection • No load power consumption less than 0.15W
- Short circuit, over current, over voltage and over temperature protection
- Size: 6.73"W x 2.48"H x 1.48"D • Certifications: UL/CUL • 5-year warranty

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Efficiency (%)	Load Regulation (%)	Line Regulation (%)	Pricing 1	Pricing 10
2215136	OWA-90U-12	12V @ 7.5A	90	88	1.5	0.5	$43.95	$38.95
2215144	OWA-90U-15	15V @ 6A	90	89	1.0	0.5	43.95	38.95
2215161	OWA-90U-24	24V @ 3.75A	90	89	0.5	0.5	43.95	38.95
2215187	OWA-90U-36	36V @ 2.5A	90	89.5	0.5	0.5	43.95	38.95
2215195	OWA-90U-42	42V @ 2.15A	90.3	89.5	0.5	0.5	43.95	38.95
2215208	OWA-90U-48	48V @ 1.88A	90.3	89.5	0.5	0.5	43.95	38.95
2215216	OWA-90U-54	54V @ 1.67A	90.2	89.5	0.5	0.5	43.95	38.95

HRP G5 Series Enclosed Single Output Power Supplies

Enclosed Power Supplies on pages 17-20

The G5 series of Mean Well power supplies have built in PFC functions to provide high efficiencies of at least 87%. Like the popular G3 series, these power supplies have high reliability, long life and can operate at high temperatures of 158°F (70°C). Get the latest and greatest of the G5 series now!

*Web Code: EPS

- Short circuit, overload, over voltage and over temperature protections
- Withstand 300VAC surge input for 5 seconds • Universal AC input/full range
- Built-in constant current limiting circuit, remote sense function and DC OK signal (*except P/N 2101868)
- Cooling fan ON-OFF control and PFC function • 5-year warranty • Certifications: UL/CUL/TUV/CB/CE

HRP-300

HRP-450

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Efficiency (%)	1	10
2102203	HRP-300-12	12V @ 27A	324	88	$79.95	$72.95
2122319	HRP-450-12	12V @ 37.5A	450	88	114.95	104.95
2101868	HRP-150-24*	24V @ 6.5A	156	88	54.95	49.95
2102220	HRP-300-24	24V @ 14A	336	87	79.95	72.95
2122335	HRP-450-24	24V @ 18.8A	451.2	88	124.95	114.95
2100961	HRP-600-24	24V @ 27A	648	88	124.95	114.95
2102318	HRP-300-36	36V @ 9A	324	88	76.95	69.95
2122360	HRP-450-48	48V @ 9.5A	456	89.5	124.95	114.95

AC-to-DC Single Output Table-Top Switching Power Supplies

Table-Top Power Supplies on pages 6-9

These table-top power supplies are essential in powering industrial devices. Choose the one that fits your needs. Need a power cord? We recommend P/N 38050 (pg 6).

1537256

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Output Connector	Size (L" x W" x H")	1	10
309876	GI12-US0520	5V @ 2A	10	2.1mm x 5.5mm†	2.6 x 1.9 x 1.3	$9.95	$8.95
2144956	GQ65-060330-E1	6V @ 3.3A	19.8	2.1mm x 5.5mm	3.6 x 2.0 x 1.3	14.95	13.49
2218151	AD8180LF	12V @ 5A	60	2.5mm x 5.5mm†	4.6 x 2.4 x 1.4	16.95	15.49
2205165	EA11011H-120	12V @ 10A	120	4 DIN male	5.4 x 2.3 x 1.3	39.95	36.95
2172789	EA1030D1*	24V @ 1.25A	30	2.1mm x 5.5mm	3.8 x 1.7 x 1.2	14.95	14.49
1537256	OH-1048A2401700U-U	24V @ 1.7A	40.8	2.5mm x 5.5mm†	4.5 x 2.0 x 1.3	17.49	15.49
1942788	EA1050B240	24V @ 2.5A	60	2.1mm x 5.5mm†	4.8 x 2.4 x 1.4	17.49	15.49
1950913	EA1050B-240-1	24V @ 2.5A	60	2.5mm x 5.5mm†	4.8 x 2.4 x 1.4	19.95	18.95
2172797	EA11001D-240	24V @ 3.75A	90	2.5mm x 5.5mm†	5.4 x 2.3 x 0.4	27.95	25.49

*AC power cord included †Center positive polarity, female

AC-to-AC Wall Adapters

Wall Adapters on pages 2-6

These adapters are used for AC powered appliances. Take a look at our selection and get yours now! *Web Code: ABQ

2202765

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Output Connector	Size (L" x W" x H")	1	10
2202773	PI-41-43A	9V @ 0.78A	7	2.1 x 5.5mm R/A	2.4 x 2.0 x 1.6	$8.95	$7.95
2167576	AM-121200A	12V @ 1.2A	15	2.1 x 5.5mm R/A	3.2 x 2.1 x 1.9	8.95	7.95
2197581	GPU481202000WA0O	12V @ 2A	24	2.1 x 5.5mm	3.3 x 2.6 x 2.2	14.95	13.49
2202765	24000000043	13.5V @ 1A	13.5	2.1 x 5.5mm	2.8 x 2.2 x 1.8	7.95	6.95
2217916	218054	18V @ 0.5A	9	2.1 x 5.5mm	2.7 X 2.0 X 1.7	9.95	8.95
2179622	AFU180200	18V @ 2A	36	2.1 x 5.5mm	3.4 x 2.7 x 2.1	12.95	11.95
2217721	ZMCE-022	24V @ 1A	24	2.5 x 5.5mm	3.2 x 2.2 x 1.9	9.95	8.95

Power up with Jameco Electronics!

Need a little power in your life? You have the power in your hands! Jameco has one of the largest power supply inventories in the industry and though we've dedicated this entire catalog to our most popular power products, it only skims the surface.

Check out our new online Power Resource Center at www.Jameco.com/powercenter and discover helpful Buyer's Guides designed to answer your questions about types, uses and everything else you need to know to select the power supply perfect for your needs.

To access complete specifications and related products, plus the latest pricing and availability, enter the Web Code found on the pages ahead into the Web search box at the top of any Jameco Webpage.

We carry the industry's most popular brands and specialize in pricing our products below our competition. Add our trusted family of Jameco ReliaPro power supplies to the mix and you'll find even more savings.

Have high volume or customization needs? Jameco can help! Call us at 800-831-4242 and one of our Power Specialists will be happy to assist.

Jameco has everything you need to power up!

The Jameco Difference

Customer Service

We work hard to provide the best customer service in the industry. Our management team's first priority is listening and responding to customer feedback. You can email the management team directly at Management@Jameco.com with your feedback and expect a prompt and personal response.

Improved Shipping Options

Jameco has been hard at work expanding shipping options which for many have significantly reduced shipping costs. Whether you are looking for low pricing on air shipping or just want it as inexpensive as possible, Jameco's expanded options start at less than $4.

Selection

If you want great service, low prices and a reliable supplier of low-cost electronic components, turn to Jameco first. We carry house brands, factory over-runs and are franchised with over 200 name brands color-coded throughout the catalog. Look for our spec-by-spec, feature-by-feature comparison-shopping. Jameco has long standing relationships with manufacturers around the world, and we work hard to source a wide selection of value components.

Catalog Tools

Jump from catalog to website seamlessly with Jameco's exclusive Web Code. By simply entering the three character code into the Jameco.com search box you'll find more information, additional web-only products and the latest pricing and availability information. Don't search; simply step from catalog to the Website without missing a beat.



PayPal™ **Jameco Now Accepts PayPal**

CATALOG QUICK INDEX

Featured Products	*Inside Front Cover,25,Back Cover*
Brackets & Accessories	*22*
DIN-Rail Power Supplies	*23-24*
Encapsulated Power Converters	*24*
Enclosed Power Supplies	*Inside Front Cover,17-22,25*
High Voltage Power Supply	*12*
Interchangeable Power Adapters	*4,6*
LED Power Supplies	*Inside Front Cover,21,22*
Medical Power Supplies	*2,6,8-9,15-19*
Open-Frame Power Supplies	*15,16,Back Cover*
Power Cables	*25*
Power Cords	*6,13,14,25*
Power Entry & Line Filters	*13*
Power Jacks, Plugs & Adapters	*10*
Power Transfomers	*11,12*
Miscellaneous Transfomers	*12*
Table-Top Power Supplies	*Inside Front Cover,6-9*
Wall Adapters	*Inside Front Cover,2-6,11,25,Back Cover*

Prices and discounts are subject to change without notice.

Jameco Electronics, ValuePro and ReliaPro are trademarks of James Electronics, LTD. Other product names and logos are used for identification purposes only and are trademarks of their respective companies. ©2015 James Electronics. All rights reserved.

AC-to-AC & AC-to-DC Regulated Switching Wall Adapters

3 LEVELS OF SAVINGS: NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

AC-to-AC Wall Adapters

Input: 120VAC @ 60Hz

Female

Male

Female Right Angle

Screw Terminals

*Web Code: ABQ

2082530

206439

We specialize in Wall Adapters – Call for additional OEM PRICING. We are happy to change any listed AC wall adapter power plug to a connector of your choice (see pg 10) for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

Part No.	Manufacturer	Product No.	Output Rating Voltage (VAC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50	Pricing 100
2082521	Arndt Electronics	5-2634	5	400	1.7mm x 5.5mm right angle **F**	2.0 x 1.4 x 1.3	White	6'	0.4	UL/CSA	$2.95	$2.59	$2.29	$1.95
2082530	Arndt Electronics	5-2633	5	400	1.7mm x 5.5mm right angle **F**	2.0 x 1.4 x 1.3	Black	6'	0.4	UL/CSA	2.95	2.59	2.25	1.95
100061	ReliaPro	ACU090050	9	500	2.1mm x 5.5mm **F**	2.7 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
2202773	Bogen	PI-41-43A	9	780	2.1mm x 5.5mm right angle **F**	2.4 x 2.0 x 1.6	Black	6'	0.6	UL/CSA	8.95	7.95	6.95	5.95
102234	ReliaPro	ACU090100	9	1000	2.1mm x 5.5mm **F**	3.2 x 2.2 x 1.9	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	6.95
157041	ReliaPro	ACU090100E8942	9	1000	2.5mm x 5.5mm **F**	2.1 x 2.1 x 1.6	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	6.95
2167648	OEM	AA091A5	9	1500	2.1mm x 5.5mm **F**	2.4 x 2.4 x 1.9	Black	6'	0.8	UL/CSA	8.95	7.95	6.95	5.95
112336	ReliaPro	ACU090150	9	1500	2.5mm x 5.5mm **F**	2.5 x 2.2 x 2.0	Black	6'	0.9	UL/CUL	10.95	9.95	8.95	7.95
101258	ReliaPro	ACU120050	12	500	2.1mm x 5.5mm **F**	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
2179614	ReliaPro	ACU120050R	12	500	2.5mm x 5.5mm **F**	2.5 x 2.0 x 1.7	Black	6'	0.4	UL/CUL	8.95	7.95	6.95	5.95
10081	ReliaPro	ACU120100J0920	12	1000	2.1mm x 5.5mm **F**	2.6 x 2.4 x 2.0	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	7.29
100167	ReliaPro	A411201000U	12	1000	2.5mm x 5.5mm **F**	3.2 x 2.4 x 2.0	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	7.29
10428	ReliaPro	ACU120100Z9121	12	1000	3.5mm **M**	2.6 x 2.4 x 2.0	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	6.29
2167576	Arndt Electronics	AM-121200A	12	1200	2.1mm x 5.5mm right angle **F**	3.2 x 2.1 x 1.9	Black	6'	0.9	UL/CSA	8.95	7.95	6.95	6.29
167151	ReliaPro	ADU120150	12	1500	2.1mm x 5.5mm **F**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	11.95	10.95	9.95	8.95
307838	ReliaPro	ADU120160H4120	12	1600	2.5mm x 5.5mm **F**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	12.95	11.95	10.95	9.95
206404	ReliaPro	MGT1220	12	1670	Screw terminals with green LED	3.2 x 2.2 x 1.9	White	—	0.9	UL	9.95	8.95	7.95	7.29
2197581	ReliaPro	GPU48120200WA00	12	2000	2.1mm x 5.5mm **F**	3.3 x 2.6 x 2.2	Black	6'	1.7	UL/CUL	14.95	13.49	11.95	10.49
2197847	Arndt Electronics	A71235DC	12	3500	Stripped & tinned **(Table-Top style)**	3.9 x 2.7 x 2.2	Black	6'	2.1	UL/CSA	11.95	10.95	9.95	8.95
2138978	Arndt Electronics	JOD-48U-12A	13.5	1000	1.3mm x 3.5mm **F**	2.8 x 2.2 x 1.9	Black	6'	0.6	UL/CUL	7.95	6.95	5.95	4.95
2202765	Arndt Electronics	240000000043	13.5	1000	2.1mm x 5.5mm **F**	2.8 x 2.2 x 1.8	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.59
171408	ReliaPro	ACU140050	14	500	2.1mm x 5.5mm **F**	2.8 x 2.0 x 1.6	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	6.25
318684	ReliaPro	ACU140085	14	850	2.5mm x 5.5mm right angle **F**	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	11.95	10.95	9.95	8.95
100108	ReliaPro	ADU160100	16	1000	2.1mm x 5.5mm **F**	2.5 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	11.95	10.95	9.95	8.95
2217748	Arndt Electronics	ZMCE-014	18	300	Stripped/tinned	2.3 x 1.6 x 1.4	Black	6'	0.5	UL/CUL	6.95	5.95	4.95	4.49
2217916	Arndt Electronics	218054	18	500	2.1mm x 5.5mm **F**	2.7 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	6.95
2082142	Ault	308-2018	18	900	Screw terminals	1.9 x 2.2 x 2.0	Beige	—	0.7	UL	4.95	4.49	3.95	3.59
121216	ReliaPro	ADU180100	18	1000	2.1mm x 5.5mm **F**	3.1 x 2.7 x 1.9	Black	6'	1.1	UL/CUL	11.95	10.95	9.95	8.95
2179622	ReliaPro	AFU180200	18	2000	2.1mm x 5.5mm **F**	3.4 x 2.7 x 2.1	Black	6'	1.7	—	12.95	11.95	10.95	9.95
87581	ReliaPro	ADU240050	24	500	2.1mm x 5.5mm **F**	2.5 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
206439	ReliaPro	MGT2420	24	830	Screw terminals with green LED	3.2 x 2.2 x 1.9	White	—	0.9	UL	10.95	9.95	8.95	7.95
140599	ReliaPro	ADU240100D5531	24	1000	2.1mm x 5.5mm **F**	3.0 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	11.95	10.95	9.95	8.95
2217721	Arndt Electronics	ZMCE-022	24	1000	2.5mm x 5.5mm **F**	3.2 x 2.2 x 1.9	Black	6'	1.4	UL/CUL	9.95	8.95	7.95	6.95
10102	ReliaPro	ADU240100E0461	24	1000	3.5mm **M**	3.0 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	11.95	10.95	9.95	8.95
2100195	ReliaPro	GPU572401500WA00	24	1500	2.1mm x 5.5mm **F**	3.3 x 2.6 x 2.3	Black	6'	1.7	UL/CUL	14.95	13.49	11.95	10.95
2197548	ReliaPro	GPU572402000WA00	24	2000	2.1mm x 5.5mm **F**	3.3 x 2.6 x 2.2	Black	6'	1.7	UL/CUL	17.95	15.95	13.49	11.95
2205579	Arndt Electronics	MGT2450P	24	2100	Screw terminals	3.2 x 2.2 x 1.9	White	—	0.9	UL/CUL	15.95	14.95	13.49	11.95

AC-to-DC Regulated Switching Wall Adapters

*Web Code: CDZ

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 10) for just $2.50 each. A 100 pc. minimum order applies. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

◆ Polarity 1 (center negative)
Polarity 2 (center positive)
Female(F) Male(M)

Female Straight

Female Right Angle

2158549

Part No.	Manufacturer	Product No.	Output Rating Volt. (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50
2138636	Emerson	SW013US-0500020US*	5	200	USB type-A F	100-240@50-60	2.3 x 1.8 x 0.9	Black	—	0.2	TUV/FCC	$3.95	$3.59	$3.19
2217730	Arndt Electronics	ZMCE-039*	5	1000	Stripped/tinned F **2**	100-240@50-60	2.3 x 1.3 x 1.0	Black	6'	0.2	UL/CUL/CEC	6.95	6.25	5.95
2218193	Arndt Electronics	MU05-J050100-A1*	5	1000	1.3mm x 3.5mm F **2**	100-240@50-60	2.6 x 1.3 x 1.5	Black	6'	0.2	UL/CUL/CEC	8.95	7.95	6.95
252720	Phihong	PLA05A-050*	5	1000	2.1mm x 5.5mm F **2**	100-240@50-60	2.9 x 1.1 x 1.7	Black	6'	0.3	UL/CUL	9.95	8.95	7.95
2201957	Deer Computer	AD1505C	5	1000	2.5mm x 5.5mm F **2**	100-240@47-63	2.8 x 1.4 x 2.1	Black	6'	0.3	UL/CUL/CE	7.95	6.95	6.25
2196318	Mean Well	GSM06U05-P1J**	5	1200	2.1mm x 5.5mm F **2**	85-264@47-63	1.3 x 2.6 x 1.7	Black	4'	0.2	CUL/CE/CB/FC	9.95	8.95	8.49
2202811	Phihong	PSC11A050	5	2000	1.3mm x 3.5mm F **2**	100-240@50-60	2.8 x 1.7 x 1.3	White	6'	0.4	UL/CUL	9.95	8.95	7.95
2209158	CUI Inc	EPAS-101W-05*	5	2000	2.1mm x 5.5mm F **2**	100-240@50-60	2.4 x 1.7 x 1.0	Black	6'	0.3	UL/CUL	8.95	7.95	6.95
1940740	Mean Well CEC	GS12U05P1I	5	2000	2.1mm x 5.5mm F **2**	90-264@47-63	2.6 x 1.9 x 1.0	Black	4'	0.3	UL/CUL/CEC	10.49	8.95	8.49
2138741	ReliaPro	CP0520	5	2000	2.5mm x 5.5mm F **1**	100-240@47-63	3.0 x 1.1 x 1.6	Black	6'	0.4	UL/CUL/TUV	9.95	8.95	7.95
2188537	CUI Inc	EPAS-101W-05	5	2000	2.5mm x 5.5mm right angle F **2**	100-240@50-60	2.4 x 1.7 x 1.0	Black	6'	0.3	UL/CUL	8.95	7.95	6.95
2138724	Jentec CEC	AF1805A*	5	2500	2.1mm x 5.5mm right angle F **2**	100-120@50-60	2.4 x 1.9 x 1.1	Black	6'	0.3	UL/CUL/CEC	9.95	8.95	7.95
2158549	ReliaPro CEC	S15AA05025001*	5	2500	2.5mm x 5.5mm right angle F **2**	100-240@50-60	3.0 x 2.2 x 1.3	Black	6'	0.3	UL/CUL/CEC	9.95	8.95	7.95
1952863	Mean Well CEC	GS18U05-P1J	5	3000	2.1mm x 5.5mm F **2**	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	11.95	10.95	9.95
2167664	Fairway	WN20U-050	5	3000	2.5mm x 5.5mm F **2**	100-240@50-60	2.9 x 2.0 x 1.6	Black	6'	0.4	UL/CUL	9.95	8.95	7.95
2135451	CUI Inc CEC	EPS050400H-P5RP-FL*	5	4000	2.1mm x 5.5mm right angle F **2**	90-132@47-63	3.3 x 2.0 x 1.5	Black	6'	0.4	UL/CUL/CEC	9.95	8.95	7.95
379623	Mean Well CEC	GS25U05-P1J	5	4000	2.1mm x 5.5mm F **2**	100-240@50-60	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	12.95	11.95	10.95
2218206	Arndt Electronics CEC	MU08A9075100-A1*	7.5	1000	1.3mm x 3.5mm F **2**	100-240@50-60	2.6 x 1.3 x 1.5	Black	6'	0.2	UL/CUL/CEC	8.95	7.95	6.95
2172931	ReliaPro CEC	EA1006BU*	9	660	2.1mm x 5.5mm F **1**	100-240@50-60	2.1 x 1.4 x 1.0	Black	6'	0.1	UL/FCC/CEC	10.95	9.95	8.95

*Slimline **Medical CEC

Jameco carries the full line of Mean Well products. For additional Mean Well products visit www.Jameco.com/meanwellproducts

AC-to-DC Regulated Switching Wall Adapters (Continued)

★Web Code: CDZ

Part No.	Manufacturer	Product No.	Output Rating Volt. (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50
1940766	Mean Well	GS12U09-P1I	9	1330	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL	$10.49	$8.95	$8.49
2179585	Arndt Electronics	ADS-18C-12†*	9	2000	2.1mm x 5.5mm right angle F 2	100-240@50-60	2.8 x 2.0 x 1.3	Black	6'	0.4	UL/CUL/CEC	9.49	8.49	7.95
1952847	Mean Well	GS18U09-P1J	9	2000	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	11.95	10.95	9.95
380140	Mean Well	GS25U09-P1J	9	2780	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	12.95	11.95	10.95
2173124	ReliaPro	EA1030U†	9	3000	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.5	UL/CUL/CEC	14.95	13.49	11.95
2121578	ReliaPro	ST-12500	12	500	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	8.95	7.95	7.49
2151101	Arndt Electronics	CNR2260	12	500	2.1mm x 5.5mm F 2	100-240@50-60	3.6 x 2.0 x 1.3	Black	6'	0.3	UL/CUL/CEC	6.95	5.95	4.95
2197468	ReliaPro	S120S100B6*	12	1000	2.1mm x 5.5mm right angle F 2	100-240@50-60	2.9 x 1.8 x 1.2	Black	6'	0.3	UL/CUL/CEC	8.95	7.95	6.95
2218177	Arndt Electronics	SAL012F1NA*	12	1000	2.1mm x 5.5mm F 2	100-120@47-63	3.1 x 1.3 x 1.8	Black	6'	0.3	UL/CUL/CEC	8.95	7.95	6.95
2215734	Arndt Electronics	MT12-Y120100-A1*	12	1000	2.1mm x 5.5mm F 2	100-120@50-60	2.7 x 1.5 x 1.3	Black	6'	0.2	UL/CUL/CEC	8.95	7.95	6.95
2215742	Arndt Electronics	T012LF1209*	12	1000	2.1mm x 5.5mm F 2	100-120@50-60	3.0 x 1.6 x 1.4	Black	6'	0.2	UL/CUL/CEC	8.95	7.95	6.95
1940774	Mean Well	GS12U12-P1I	12	1000	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	10.49	8.95	8.49
2121586	ReliaPro	ST-121A	12	1000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	11.95	10.95	9.95
2218185	Arndt Electronics	SAL018F1NA*	12	1500	2.1mm x 5.5mm F 2	100-120@47-63	3.1 x 1.3 x 1.8	Black	6'	0.3	UL/CUL/CEC	9.95	8.95	7.95
2218142	Arndt Electronics	AD817F10*	12	1500	2.1mm x 5.5mm F 2	100-120@50-60	3.0 x 2.0 x 1.4	Black	6'	0.3	UL/CUL/CEC	9.95	8.95	7.95
2218118	Arndt Electronics	AD661F*	12	1500	2.1mm x 5.5mm F 2	100-120@50-60	3.0 x 2.0 x 1.4	Black	6'	0.3	UL/CUL/CEC	9.95	8.95	7.95
1952855	Mean Well	GS18U12-P1J	12	1500	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.2	UL/CUL/CEC	11.95	10.95	10.49
2209166	Arndt Electronics	GIP-650†	12	2000	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.4	UL/CUL	10.49	9.49	8.95
2082134	ReliaPro	ST-122A	12	2000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.4	UL/CUL/CEC	14.95	13.49	11.95
380156	Mean Well	GS25U12-P1J	12	2080	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	12.95	11.95	10.95
2173984	Mean Well	GS36U12-P1J	12	3000	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	3'	0.5	UL/CUL/BSMI/CB/FCC	14.49	12.95	11.49
2173116	ReliaPro	EA1036U†	12	3000	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	17.95	16.95	15.49
1940782	Mean Well	GS12U15-P1	15	800	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	10.49	8.95	8.49
1952871	Mean Well	GS18U15-P1J	15	1200	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.4	Black	6'	0.4	UL/CUL/CEC	11.95	10.95	10.49
380173	Mean Well	GS25U15-P1J	15	1670	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CE	12.95	11.95	10.95
2173108	ReliaPro	EA1030CU†	15	2000	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	14.95	13.95	12.49
380191	Mean Well	GS25U18-P1J	18	1380	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 1.2 x 1.3	Black	6'	0.5	UL/CUL/CEC	12.95	11.95	10.95
1940803	Mean Well	GS12U24-P1I	24	500	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	10.95	9.95	8.95
1952898	Mean Well	GS18U24-PIJ	24	750	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	11.95	10.95	10.49
2121594	ReliaPro	ST-241A	24	1000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	12.95	11.95	10.95
1953698	ReliaPro	MPC2400107	24	1000	2.1mm x 5.5mm F 2	100-240@50-60	3.4 x 2.7 x 2.2	Black	6'	0.5	UL/CSA	11.95	10.95	9.95
1953671	ReliaPro	MPC-2400107	24	1000	2.5mm x 5.5mm F 2	120-240@50-60	3.4 x 2.7 x 2.2	Black	6'	0.5	UL/CSA	14.95	13.49	11.95
380202	Mean Well	GS25U24-P1J	24	1040	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	12.95	11.95	10.95
2173095	ReliaPro	EA1030DU†	24	1250	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	13.95	12.49	10.95
2173992	Mean Well	GS36U24-P1J	24	1500	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	3'	0.5	UL/CUL/BSMI/CB/FCC	14.95	13.49	11.95
2167613	ReliaPro	ST-242A	24	2000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	6'	0.3	—	15.95	14.95	13.95
380220	Mean Well	GS25U28-P1J	28	890	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.6	UL/CUL/CEC	12.95	11.95	10.95
2179391	ReliaPro	PA1024-360HU	36	670	2.5mm x 5.5mm F 2	90-264@47-63	2.7 x 1.8 x 1.3	Black	6'	0.3	UL/CUL/CEC	12.95	11.95	11.49
380244	Mean Well	GS25U48-P1J	48	520	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	12.95	11.95	10.95

†RFI filter on cord *Slimline CEC

★Web Code: CBQ

AC-to-DC "Slim Line" Regulated Switching Wall Adapters

Output connector: 2.1mm x 5.5mm F2 (center positive)

• 2-wire AC input • Output cord length: 6' • Color: black • Input volt.: 100 – 240VAC @ 47-63Hz • One-year warranty

Part No.	Manufacturer	Output Rating Volt (VDC)	Output Rating Curr. (mA)	Size (in.) (H x W x D)	Wt. (lbs.)	Pricing 1	Pricing 10	Pricing 50	Pricing 100
251565	ReliaPro	3.3	1500	2.5x1.1x1.7	0.2	$10.95	$9.95	$8.95	$7.49
251600	ReliaPro	3.3	2500	2.9x1.1x1.7	0.3	11.95	10.95	9.95	8.49
2173010	Phihong	5	400	1.9x1.4x0.9	0.1	5.95	4.95	4.49	3.95
252701	ReliaPro	5	500	2.9x1.1x1.7	0.3	10.95	9.95	8.95	7.95
2126125	OEM	5	800	1.9x1.6x0.9	0.1	6.95	5.95	5.49	4.95
252720	ReliaPro	5	1000	2.5x1.1x1.7	0.2	9.95	8.95	7.95	7.19
2211098	Phihong	5	1000	2.6x1.4x1.1	0.2	10.95	9.95	8.95	7.95
1940660	Mean Well	5	1000	2.6x1.3x1.9	0.2	11.95	10.95	9.95	8.95
252728	ReliaPro	5	1500	2.5x1.1x1.7	0.2	11.95	10.95	9.95	8.95
210894	ReliaPro	5	2000	2.9x1.4x2.2	0.2	12.95	11.95	10.95	9.95
252736	ReliaPro	5	2500	2.9x1.3x2.2	0.3	13.95	12.49	11.49	9.95
2082222	Arndt Electronics	5	3000	2.9x1.3x2.2	0.3	9.95	8.95	7.95	6.95
2145078	ReliaPro	6	500	2.5x1.7x1.1	0.3	9.95	8.95	7.95	6.95
1940678	Mean Well	7.5	800	2.6x1.3x1.9	0.2	9.49	8.49	7.95	7.49
252753	ReliaPro	9	500	2.5x1.1x1.7	0.2	10.95	9.95	8.95	7.95
1940686	Mean Well	9	660	2.6x1.3x1.9	0.2	9.49	8.49	7.95	7.49
1950841	ReliaPro	9	1000	2.5x1.1x1.7	0.2	11.95	10.95	9.95	8.95

Part No.	Manufacturer	Output Rating Volt (VDC)	Output Rating Curr. (mA)	Size (in.) (H x W x D)	Wt. (lbs.)	Pricing 1	Pricing 10	Pricing 50	Pricing 100
252779	ReliaPro	9	1200	2.9x1.3x2.2	0.3	$11.95	$10.95	$9.95	$8.95
252786	ReliaPro	9	1500	2.9x1.3x2.2	0.3	12.95	11.95	10.95	9.95
2173132	ReliaPro	9	2000	2.8x2.0x1.3	0.3	13.95	12.49	11.95	10.95
252795	ReliaPro	12	250	2.5x1.1x1.7	0.2	8.95	7.95	6.95	6.25
2150758	Arndt Electronics	12	500	2.5x1.7x1.1	0.2	7.95	6.95	6.25	5.95
252808	ReliaPro	12	500	2.5x1.1x1.7	0.2	9.95	8.95	7.95	6.95
1940694	Mean Well	12	500	2.6x1.3x1.9	0.2	10.95	9.95	8.95	7.95
252816	ReliaPro	12	600	2.5x1.1x1.7	0.2	9.95	8.95	7.95	6.95
252824	ReliaPro	12	1000	2.9x1.3x2.2	0.3	12.95	11.49	9.95	8.95
252833	ReliaPro	12	1250	2.9x1.3x2.2	0.3	13.95	12.95	11.95	10.95
1950497	ReliaPro	12	2000	2.9x2.1x1.3	0.4	15.95	14.49	12.95	11.49
2215726	Arndt Electronics	12	2500	3.0x1.4x2.0	0.3	13.95	12.95	11.49	9.95
254757	ReliaPro	15	800	2.9x1.3x2.2	0.2	12.95	11.49	10.49	9.49
252904	ReliaPro	15	1000	2.9x1.3x2.2	0.3	13.95	12.95	11.95	10.95
252866	ReliaPro	24	500	2.9x1.3x2.2	0.3	12.95	11.95	10.95	9.95
2076341	ReliaPro	24	630	2.9x1.3x2.2	0.3	12.95	11.95	10.95	9.95

CEC

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

AC-to-DC Regulated Wall Adapters

3 LEVELS OF SAVINGS: NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

Energy Star Worldwide Interchangeable AC-to-DC Regulated Switching Wall Adapters

Meets US and European Energy Star compliance. Approved for European high-efficiency power applications.

★Web Code: NBH

- Field changeable AC plug clips **(sold separately, unless noted)**
- Regulated output • Double insulated
- Input voltage: 90-264VAC @ 47-63Hz • Power-on LED
- Output connector: **2.1mm x 5.5mm female center positive;** (except where noted, see footnotes **, #, ✓, ## below)
- Load regulation: ±5% • Class B EMI • 6' black cord
- Applications: wireless communications, portable equipment, digital camera, peripherals and networking

229181

Shown w/o AC Plug Clip
AC Plug Clips Not Included

USA	European (EU)	UK	Australia (AUS)
229155	229163	229171	2081422

Phihong & Mean Well AC Plug Clips (below)

Part No.	Manufacturer	Product No.	Output Volt. (VDC)	Current (A)	Power (W)	Ripple (mVp-p)	Line Regulation	Efficiency (%)	Dimensions (L" x W" x H")	Pricing 1	10	50
228785	Phihong	PSA11R-033	3.3	2.0	6	50	±5%	70	3.3 x 1.8 x 1.3	$10.95	$9.95	$8.95
2202888	Phihong	PSA21R-033	3.3	3.0	10	50	±1%	70	3.9 x 2.3 x 1.2	12.95	11.95	10.95
2144809	Phihong	PSA08R-050†#	5	1.0	5	50	±1%	70	2.8 x 1.8 x 1.0	8.95	7.95	6.95
2202829	Phihong	PSA08R-050-1.3**	5	1.0	5	50	±1%	70	2.8 x 1.8 x 1.0	9.95	8.95	7.95
2202790	Cincon	TR10R050-1*	5	1.6	8	50	±1%	65	2.8 x 1.7 x 1.3	11.95	10.95	9.95
2197812	Cincon	TR10RO50 ✓*	5	1.6	8	50	±1%	65	2.8 x 1.7 x 1.3	11.95	10.95	9.95
2158240	Phihong	PSM11R-050##	5	2.0	10	100	±5%	70	2.8 x 1.7 x 1.2	9.95	8.95	7.95
2202853	Phihong	PSA10R-090	9	1.1	10	90	±1%	65	3.4 x 2.0 x 1.3	10.95	9.95	8.95
2202896	Phihong	PSA21R-090	9	1.67	15	90	±1%	70	3.9 x 2.3 x 1.2	11.95	10.95	9.95
2082311	Mean Well	GE18I09-P1J	9	2.0	18	100	±5%	75	3.2 x 1.7 x 1.6	12.49	11.49	9.95
2138951	Phihong	PSA11R-120	12	0.83	10	120	±1%	65	2.8 x 1.8 x 1.2	9.95	8.95	7.95
2108656	Phihong	PSC12R-120	12	1.0	12	240	±5%	78	2.8 x 1.8 x 1.2	14.95	13.95	12.95
2154986	ReliaPro	FW75550/12*	12	1.25	15	150	±5%	80	3.5 x 2.0 x 1.3	15.95	14.95	13.95
2210693	Asian Power Devices	WA-18H12§	12	1.5	18	120	±2%	80	3.0 x 1.9 x 1.4	14.95	13.95	12.95
228849	Phihong	PSA21R-120	12	1.67	20	120	±1%	70	3.9 x 2.3 x 1.2	16.95	14.95	13.49
2100179	Phihong	PSAA20R-120	12	1.67	20	120	±5%	81	2.8 x 2.0 x 1.3	17.95	16.95	14.49
2102094	Mean Well	GE24I12-P1J	12	2.0	24	120	±1%	78	3.2 x 1.7 x 1.6	14.95	13.49	11.95
228822	Phihong	PSA11R-150	15	.67	10	150	±5%	70	3.4 x 2.0 x 1.3	16.95	14.95	13.49
2205632	CUI	EMS240025-PSP-SZ*	24	0.25	6	240	±1%	80	2.5 x 1.6 x 1.2	8.95	7.95	6.95
2082345	Mean Well	GE12I24-P1J	24	0.63	15	240	±3%	80	2.8 x 1.6 x 1.5	9.49	8.49	7.95
2192528	Edac	EA1024KR*	24	1.25	30	240	±1%	80	2.8 x 1.6 x 1.3	24.95	22.95	19.95

Input plugs: †Includes US AC plug clip only § Includes US and European plug clips *Kit includes US, UK, EU, AUS plugs

Output connectors: **1.3mm x 3.5mm female plug #2.5mm x 5.5mm female plug ✓ 2.5mm x 5.5mm right angle female plug ##Mini USB plug

Phihong AC Plug Clips *(sold separately, required for above adapters)*

Part No.	Mfr. P/N	Description (see above for photos)	1	10	50	100
229155	RPA	US AC plug only	$1.25	$1.19	$1.09	$.99
229163	RPE	European AC plug only	1.25	1.19	1.09	.99
229171	RPK	United Kingdom AC plug only	1.49	1.35	1.19	1.09
2081422	RPS	Australia AC plug only	1.25	1.19	1.09	.99
229181	RPKIT	Kit includes US, EU, UK & AU clips (4)	4.79	4.39	3.95	3.49

Mean Well AC Plug Clips *(sold separately, required for above adapters)*

Part No.	Mfr. P/N	Description (see above for photos)	1	10	50	100
2082353	AC-Plug-US	US AC plug only	$1.19	$1.09	$.99	$.89
2082361	AC-Plug-EU	European AC plug only	1.19	1.09	.99	.89
2082370	AC-Plug-UK	United Kingdom AC plug only	1.39	1.25	1.09	.99
2082388	AC-Plug-AU	Australia AC plug only	1.19	1.09	.99	.89
2082396	AC-Plug-MIX	Kit includes US, EU, UK & AU clips (4)	4.59	4.19	3.79	3.39

AC-to-DC Regulated Linear Wall Adapters

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 10) for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

1953639

Female

Female Right Angle

★Web Code: WAZ

◆ Polarity 1 ⊕—⊖ (center negative)
Polarity 2 ⊖—⊕ (center positive)
Female(F) Male(M)

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	10	50	100
164101	ReliaPro	GPU410500500WD00	5	500	2.1mm x 5.5mm F **2**	120 @ 60	3.1 x 2.1 x 1.7	Black	6'	0.6	UL/CUL	$10.95	$9.95	$8.95	$7.95
319986	Arndt Electronics	DV-580R	5	800	2.5mm x 5.5mm F **2**	120 @ 60	3.2 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	7.49	6.49	5.49	4.49
1953612	ReliaPro	DDU050100	5	1000	2.1mm x 5.5mm F **2**	120 @ 60	3.2 x 2.2 x 1.8	Black	6'	1.2	UL/CUL	10.95	9.95	8.95	7.95
168605	ReliaPro	DBU0501000	5	1000	2.5mm x 5.5mm F **2**	120 @ 60	3.3 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	10.95	9.95	8.95	7.95
190512	ReliaPro	DBU60020-H3570	6	200	2.1mm x 5.5mm F **2**	120 @ 60	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	9.95	8.95	7.95	6.95
283573	ReliaPro	ADR-6V500MA-2.1	6	500	2.1mm x 5.5mm F **2**	120 @ 60	3.1 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	10.95	9.95	8.95	7.95
190529	ReliaPro	AD9123	9	250	2.5mm x 5.5mm right angle F **2**	120 @ 60	2.5 x 2.0 x 1.6	Black	6'	0.5	UL/CUL	9.95	8.95	7.95	6.95
1953639	ReliaPro	DCU09050	9	500	2.1mm x 5.5mm F **2**	120 @ 60	2.4 x 2.0 x 1.6	Black	6'	0.9	UL/CUL	10.95	10.49	9.95	8.95
1953647	ReliaPro	GPU410900500WD00	9	500	2.5mm x 5.5mm F **2**	120 @ 60	3.0 x 2.0 x 1.6	Black	6'	0.9	UL/CUL	10.95	10.49	9.95	8.95
220898	ReliaPro	DCU120020	12	200	2.1mm x 5.5mm F **1**	120 @ 60	2.5 x 2.0 x 1.7	Black	6'	0.5	UL/CUL	8.95	7.95	6.95	6.25
162996	ReliaPro	DDU120050	12	500	2.1mm x 5.5mm F **2**	120 @ 60	3.2 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	11.95	10.95	9.95	8.95
170245	ReliaPro	RDU120100	12	1000	2.1mm x 5.5mm F **2**	120 @ 60	3.2 x 2.3 x 2.0	Black	6'	1.2	UL/CUL	14.95	13.49	11.95	10.95
1953663	ReliaPro	DCU1201000	12	1000	2.5mm x 5.5mm F **2**	120 @ 60	3.3 x 2.3 x 2.0	Black	6'	1.2	UL/CUL	14.95	13.49	11.95	10.95
174861	ReliaPro	DFU240050	24	500	2.1mm x 5.5mm F **2**	120 @ 60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CUL	14.95	13.49	11.95	10.95
174879	ReliaPro	DCU090025	24	500	2.5mm x 5.5mm F **2**	120 @ 60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CUL	14.95	13.49	11.95	10.95

More AC-to-DC Wall Adapters listed on pages 2-3 & 5-6

AC-to-DC Unregulated Linear Wall Adapters

Input: 120VAC @ 60Hz

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 10) for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

★Web Code: UAP

◆ Polarity 1 ⊕—○—⊖ (center negative)
Polarity 2 ⊖—○—⊕ (center positive)
Female(F) Male(M)

2099921

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50	Pricing 100
112070	ReliaPro	DBU050022Z5480	5	225	2.5mm x 5.5mm F **2**	1.9 x 2.2 x 2.0	Black	7'	0.3	UL/CUL	$5.95	$5.49	$4.95	$4.49
2179745	DVE	DV-6100-3508	6	100	2.1mm x 5.5mm F **1**	2.4 x 1.5 x 1.0	Black	6'	0.3	UL/CUL	3.95	3.49	2.95	2.49
2099551	Arndt Electronics	UE-3560300D	6	300	2.5mm x 5.5mm F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.49	4.95	4.49
2138716	Arndt Electronics	D41-06-500R	6	500	2.1mm x 5.5mm F **1**	2.6 x 2.0 x 1.5	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
101266	ReliaPro	DBU060050E3860	6	500	2.1mm x 5.5mm F **2**	2.4 x 1.9 x 1.6	Black	6'	0.4	UL/CUL	6.95	6.25	5.59	4.95
147707	ReliaPro	DBU060080C6962	6	800	2.1mm x 5.5mm F **2**	2.3 x 2.0 x 1.6	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
220943	ReliaPro	DCU060120G2401	6	1200	2.1mm x 5.5mm F **1**	2.5 x 2.0 x 1.7	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	6.95
2215460	Fujitsu	MA14L-2001-0012	9	200	1.3mm x 3.5mm right angle F **2**	2.4 x 1.7 x 1.5	Black	6'	0.4	UL/CSA	5.95	4.95	4.59	3.95
134025	ReliaPro	DBU090020Z6100	9	200	2.1mm x 5.5mm F **1**	2.1 x 1.7 x 1.6	Black	6'	0.4	UL/CUL	5.95	5.35	4.79	4.39
2100152	Arndt Electronics	AP2911	9	200	2.1mm x 5.5mm F **2**	2.6 x 1.8 x 1.5	Black	6'	0.4	UL/CUL	3.95	3.49	2.95	2.59
100845	ReliaPro	DBU090020E0850	9	200	2.1mm x 5.5mm F **2**	2.1 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	5.49	4.59
2082556	Arndt Electronics	5-2616	9	200	2.1mm x 5.5mm right angle F **2**	2.2 x 1.4 x 1.4	Black	6'	0.5	UL/CUL	1.95	1.75	1.49	1.25
2082548	Atlinks	5-2617	9	200	2.1mm x 5.5mm right angle F **2**	2.2 x 1.4 x 1.4	Gray	6'	0.5	UL/CUL	3.95	3.59	3.29	2.95
2138847	Arndt Electronics	D6300-01	9	200	2.5mm M **2**	2.2 x 1.7 x 1.4	Black	6'	0.4	UL/CSA	3.95	3.49	2.95	2.59
133891	ReliaPro	DBU090030C112	9	300	2.1mm x 5.5mm F **2**	2.0 x 1.5 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	5.49	4.95
318676	ReliaPro	DBU090030H5790	9	300	2.5mm x 5.5mm F **1**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	5.49	4.95
189238	ReliaPro	DBU090030H4540	9	300	2.5mm x 5.5mm F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	4.95	4.49
163628	ReliaPro	DCU090050Z7484	9	500	2.1mm x 5.5mm F **1**	2.5 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
100853	ReliaPro	DCU090050E2961	9	500	2.1mm x 5.5mm F **2**	2.5 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
236937	ReliaPro	DCU090050G6440	9	500	2.5mm x 5.5mm right angle F **2**	2.5 x 2.0 x 1.7	Black	6'	0.4	UL/CUL	7.95	6.95	6.25	5.49
15561	ReliaPro	DCU090050A2011	9	500	3.5mm M **2**	2.5 x 2.0 x 1.6	Black	6'	0.5	UL/CSA	7.95	6.95	6.25	5.49
202180	ReliaPro	DCU090060F2091	9	600	2.1mm x 5.5mm F **2**	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	7.95	6.95	5.95	5.49
100175	ReliaPro	DCU090060Z6652	9	600	2.5mm x 5.5mm F **2**	2.7 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	5.95	5.49
2192704	Arndt Electronics	TEAD-41-090800U	9	800	2.1mm x 5.5mm F **2**	2.5 x 2.0 x 1.6	Black	6'	0.7	UL/CUL	7.95	6.95	5.95	4.95
164929	ReliaPro	DDU090100C2550	9	1000	2.1mm x 5.5mm F **1**	2.7 x 2.3 x 1.8	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
2179542	Arndt Electronics	ADP2108GT	9	1000	2.1mm x 5.5mm right angle F **2**	2.6 x 2.2 x 1.9	Black	6'	0.9	UL/CSA	7.95	6.95	5.95	5.49
421690	AULT	P48091000A010G	9	1000	2.1mm x 5.5mm F **2**	3.3 x 2.2 x 2.0	Black	6'	0.9	UL/CSA	8.95	7.95	6.95	6.25
364576	ReliaPro	DDU090100J0490	9	1000	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
2099921	ENG Electric	T48-9-1000D4*	9	1000	2.5mm x 5.5mm F **1** (UK plug)	3.2 x 2.3 x 1.9	Black	6'	0.9	CE/TUV	2.49	1.95	1.59	1.19
127505	ReliaPro	DDU090100	9	1000	2.5mm x 5.5mm F **2**	2.6 x 2.4 x 2.0	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
130526	ReliaPro	DDE090120F3621	9	1200	2.1mm x 5.5mm F **1**	2.4 x 2.0 x 1.8	Black	6'	1.0	UL/CSA	9.95	8.95	7.95	6.95
100095	ReliaPro	DBU120020	12	200	2.1mm x 5.5mm F **2**	2.1 x 1.8 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.49	4.95	4.49
158043	ReliaPro	DBU120020E2261	12	200	2.1mm x 5.5mm right angle F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.49	4.95	4.49
2167226	Arndt Electronics	4292A	12	200	2.5mm x 5.5mm F **2**	2.3 x 2.1 x 1.6	Black	6'	0.5	UL/CSA	5.49	4.95	4.49	3.95
127976	ReliaPro	DCU120030D7161	12	300	2.1mm x 5.5mm F **2**	2.6 x 1.8 x 1.6	Black	6'	0.7	UL/CUL	7.95	6.95	5.95	4.95
114825	ReliaPro	DCU120050D4740	12	500	Stripped & tinned	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.59	5.95
15368	ReliaPro	DCU120050Z8698	12	500	2.1mm x 5.5mm F **1**	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	7.95	6.95	6.59	5.95
102496	ReliaPro	DCU120050E8601	12	500	2.1mm x 5.5mm F **2**	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	7.95	7.29	6.59	5.95
102277	ReliaPro	DCU120050UE2631	12	500	2.5mm x 5.5mm F **2**	2.5 x 2.1 x 1.7	Black	6'	0.6	UL/CUL	7.95	7.29	6.59	5.95
17267	ReliaPro	DCU120050Z5391	12	500	3.5mm M **2**	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	6.95	5.95	5.49	4.95
2167365	Arndt Electronics	A31265	12	600	2.1mm x 5.5mm right angle F **2**	2.5 x 2.0 x 1.6	Black	6'	0.7	UL/CSA	6.95	6.49	5.95	5.49
202219	ReliaPro	DCU120070F2142	12	700	2.1mm x 5.5mm F **2**	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	8.95	7.95	7.29	6.49
2188473	Motorola	503913-007	12	750	2.5mm x 5.5mm F **2**	2.7 x 1.7 x 1.2	Black	6'	0.2	UL/CUL/CEC	7.49	6.95	6.25	5.49
117479	ReliaPro	DDU120080E6451	12	800	2.1mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.49	6.95
2217799	Arndt Electronics	AD-1280G†	12	800	2.5mm x 5.5mm F **2** (medical grade)	3.2 x 2.2 x 1.9	Black	12'	1.3	UL/CUL	7.95	6.95	6.25	5.95
129331	ReliaPro	DDU120080F2412	12	800	2.5mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.49	6.95
121232	ReliaPro	DDU120080F2271	12	800	3.5mm M **2**	2.6 x 2.4 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.49	6.95
2202917	Nite Rider	D12-10-1000	12	1000	2.1mm x 5.5mm F **2**	3.3 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	7.95	6.95	6.25	5.59
2197484	ReliaPro	DDU120100	12	1000	2.1mm x 5.5mm F **2**	2.6 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	8.95	7.95	6.95	6.25
100870	ReliaPro	DDU120100Z7974	12	1000	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	7.29
2211135	Fellows	A-48-628(R2)	12	1000	2.5mm x 5.5mm right angle F **2**	3.1 x 2.2 x 1.9	Black	6'	1.1	UL/CUL	7.95	6.95	6.25	5.59
2179770	Westell	MT12-4120100-A1**	12	1000	2.5mm x 5.5mm F **2**	2.9 x 1.6 x 1.2	Black	6'	0.2	UL/CEC	7.95	6.95	6.25	5.59
105478	ReliaPro	DDU120100Z2993	12	1000	2.5mm x 5.5mm F **2**	3.1 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29

* 240VAC 50Hz ** Slimline † 3 prong ground CEC

More AC-to-DC Wall Adapters listed on pages 2-4 & 6

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

JAMECO ReliaPro AC-to-DC Unregulated Linear Wall Adapters (Continued)

★Web Code: UAP

Input: 120VAC @ 60Hz

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 10) for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

Female | Male | Female Right Angle

◆ Polarity 1 (center negative)
Polarity 2 (center positive)
Female(F) Male(M)

123158

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50	Pricing 100
15392	ReliaPro	DDU120100E7302	12	1000	3.5mm M **2**	3.3 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	$9.95	$8.95	$7.95	$7.29
196779	ReliaPro	DDU120120G0031	12	1200	2.5mm x 5.5mm F **2**	3.0 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	10.95	$9.95	$8.95	7.95
2192747	Arndt Electronics	MW48-1201250	12	1250	2.1mm x 5.5mm F **2**	3.0 x 2.3 x 1.9	Black	6'	1.4	UL/CUL	9.95	8.95	7.95	6.95
203036	ReliaPro	DDU120150H4530	12	1500	2.1mm x 5.5mm F **1**	3.3 x 2.2 x 1.9	Black	6'	1.5	UL/CUL	15.95	14.95	13.49	11.95
136881	ReliaPro	DDU120150K1960	12	1500	2.1mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	15.95	14.95	13.49	11.95
101291	ReliaPro	DDU120150	12	1500	2.5mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	15.95	14.95	13.49	11.95
2173028	ENG	57-12-2000D	12	2000	2.1mm x 5.5mm F **2**	3.4 x 2.6 x 2.2	Black	6'	1.7	UL/CUL	12.95	11.95	10.49	8.95
308099	ReliaPro	DDU135100H3210	13.5	1000	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
123932	ReliaPro	DDU140070Z7470	14	700	2.1mm x 5.5mm F **2**	2.6 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	8.95	7.95	6.95	6.25
2172720	Globtek	WD1G500CCP-N	15	500	2.1mm x 5.5mm F **2**	3.2 x 2.3 x 1.9	Black	6'	0.8	UL/CUL	6.95	5.95	5.49	4.95
190001	ReliaPro	DCU150050E3021	15	500	2.1mm x 5.5mm F **2**	2.3 x 2.4 x 1.9	Black	6'	0.8	UL/CUL	7.95	6.95	6.25	5.95
189982	ReliaPro	DCU150050E3031	15	500	2.5mm x 5.5mm F **2**	2.3 x 2.4 x 1.9	Black	6'	0.8	UL/CUL	8.95	7.95	7.29	6.49
191652	ReliaPro	DDU150100D7051	15	1000	2.1mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
2167525	ReliaPro	DDU150100RR2200	15	1000	2.5mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	8.95	7.95	6.95	6.25
217541	NiteRider	FE4116168C030	16.8	300	2.5mm x 5.5mm F **2**	3.1 x 2.1 x 1.6	Black	6'	0.6	UL/CUL	2.49	1.95	1.59	1.25
2081713	DVE	DV-1790	17	900	2.5mm x 5.5mm F **2**	3.2 x 2.2 x 2.0	Black	6'	1.2	UL/CSA	2.49	1.95	1.59	1.25
2205261	ReliaPro	DDU180100H4550	18	1000	2.1mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.4	UL/CUL	10.95	9.95	8.95	7.95
206958	ReliaPro	DDU180100H4551	18	1000	2.5mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.4	UL/CUL	10.95	9.95	8.95	7.95
102285	ReliaPro	DDU240040Z7860	24	400	2.1mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.29	6.49
2192510	ReliaPro	DDU240050RS1160	24	500	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
191556	ReliaPro	DDU240050E5852	24	500	2.5mm x 5.5mm F **2**	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
139088	ReliaPro	DDU240050E9160	24	500	3.5mm M **2**	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
2192641	Ault	P48240600A030G	24	600	2.1mm x 5.5mm F **2**	2.9 x 2.2 x 1.9	Black	6'	1.3	UL/CSA	7.95	6.95	5.95	4.95
168495	ReliaPro	DFU240080J3180	24	800	2.1mm x 5.5mm F **2**	2.9 x 1.9 x 1.6	Black	6'	0.4	UL/CUL/TUV	11.95	10.95	9.95	8.95
220960	ReliaPro	DFU240100G2300	24	1000	2.1mm x 5.5mm F **1**	3.4 x 2.7 x 2.2	Black	6'	1.6	UL/CUL	14.95	13.49	11.95	9.95
249121	ReliaPro	DFU240120/G8520	24	1150	2.1mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.7	UL/CUL	17.95	15.95	14.49	12.95
249113	ReliaPro	DFU240120/G8510	24	1150	2.5mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.7	UL/CUL	15.95	13.95	11.49	10.95
199523	ReliaPro	DDU300050E9340	30	500	2.5mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.1	UL/CUL	10.95	9.95	8.95	7.95
2167621	Seven Star	SS104*	1.5, 3, 4.5, 6, 7.5, 9, 12	500	0.7x2.3, 1.5x4, 2.1x5, 2.5x5.5 **Female** 2.5, 3.5 **Male** (LED indicator)	3.3 x 2.0 x 1.9	Black	6'	0.8	—	5.95	4.95	3.95	3.49
123158	Steren	900-100*	1.5, 3, 4.5, 6, 7.5, 9, 12	1000	1.3x3.5, 2.1x5, 2.5x5.5 **Female** 2.5, 3.5 **Male**, 9V battery snap (LED ind.)	3.7 x 2.2 x 2.5	Black	6'	0.9	—	11.95	10.95	9.95	8.95

*110/220VAC input voltage

GlobTek® AC-to-DC Medical Table-Top Regulated Switching Power Supplies

★Web Code: WBM

- **2.5mm x 5.5mm female center positive**
- Input voltage: 90-264VAC @ 47-63Hz
- Leakage current: 0.1mA max.
- Regulation (line & load): ±5%
- Isolation voltage: 4,000VAC
- 3-wire AC input
- Ripple & noise: 1% or 100mV, whichever is smaller
- Cord lengths: DC: 6'; AC: not included use P/N 132011, pg 14
- Size: 2.9"L x 2.0"W x 1.6"H

Part No.	Mfr. Part No.	Power (W)	Output VDC/Amps	Pricing 1	Pricing 10	Pricing 50
2179606	TR9CB2500LCP	15.0	+6/2.5	$19.95	$17.95	$15.95
230683	TR9CE1250CP	15.6	+12/1.3	34.95	29.95	24.95
230763	TR9CE4000LCP	49.2	+12/4.1	49.95	44.95	39.95
230798	TR9CI2100LCP	50.4	+24/2.1	59.95	53.95	47.95

★Interchangeable Power Supplies, Adapters and Tips — Enter Web Code NBH

Accessory Power Input Cords for Table-Top Power Supplies

★Web Code: UBF

189587

38050

1951123

Part No.	Ref. No.*	Description	Color	AWG	Certification	Cord Length	Wt. (lbs.)	Cord Type	1	10	50	100
189587	1	2-conductor power cord (Figure 8 style)	Black	18/2	UL/CSA	6'	0.3	SPT	$2.95	$2.69	$2.39	$2.19
38050	2	3-conductor power cord	Black	18/3	UL/CSA	6'	0.4	SVT	4.95	4.49	3.95	3.59
1953559	3	3-conductor flat power cord (Mickey Mouse™ style)**	Black	18/3	UL/CSA	6'	0.4	SPT-2	2.59	2.25	1.95	1.59
1951123	3	3-conductor round power cord (Mickey Mouse™ style)**	Black	18/3	UL/CSA	6'	0.4	SVT	2.95	2.59	2.29	1.95

*These reference numbers for "AC cord needed" are for Table-Top Power Supplies on pages 7-9

**Ref #3 chose flat or round cable

More Power Cords on page 14

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

AC-to-DC Unregulated Linear & Regulated Switching Table-Top Power Supplies

We are happy to change the power plug on any listed table-top power supply to a connector of your choice (see pg 10) for just $2.50 ea. Overmolding also available @ $4.00 ea. A 100 pc. minimum order applies.

2155006

2099569

1940299

2155321

309876

◆ Polarity 1 ⊕—○—⊖ (center negative)
Polarity 2 ⊖—○—⊕ (center positive)

Female (F)

Male (M)

DIN (M)

Stripped

See page 13 for International Power Cords

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD/F = female; M = male; Polarity ◆	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10
2-Wire AC Input – Unregulated Linear Table-Top												★Web Code: TBE	
2155006	Lite-On	PB-1090-1L1	+12/0.75	2.5mm x 5.5mm F 2	120@60	9	No	3.2 x 2.2 x 1.9	6'/6'	1.1	UL/CUL	$7.95	$6.49
2192712	OEM	AD-121ADT-2.1	+12/1.0	2.1mm x 5.5mm F 2	120@60	12	No	3.2 x 2.2 x 1.8	6'/6'	1.4	UL/CUL	9.95	8.95
2218054	OEM	AD-121ADT-2.5	+12/1.0	2.5mm x 5.5mm F 2	120@60	12	No	3.2 x 2.2 x 1.8	6'/6'	1.4	UL/CUL	9.95	8.95
140880	ReliaPro	DC1215ST	+12/1.5	Stripped & Tinned	120@60	18	No	3.1 x 2.1 x 1.9	6'/6'	1.5	UL	12.95	11.49
143715	ReliaPro	DC1220F1	+12/2.0	2.1mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6'/6'	2.2	UL/CUL	15.95	14.49
2211178	Arndt Electronics	SY-12200	+12/2.0	2.5mm x 5.5mm F 2	120@60	24	No	3.8 x 2.6 x 2.1	6'/6'	2.1	UL/CUL	12.95	11.49
143722	ReliaPro	DC1220F5	+12/2.0	2.5mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6'/6'	2.2	UL/CUL	15.95	14.49
143731	ReliaPro	DC1220M3	+12/2.0	3.5mm M 2	120@60	24	No	3.8 x 2.8 x 2.3	6'/6'	1.9	UL/CUL	14.95	13.49
2197898	Arndt Electronics	MKD66123400	+12/3.4	5-pin DIN M	120@60	40	No	5.1 x 3.6 x 2.6	6'/6'	3.0	UL/CUL	14.95	13.49
2099569	ReliaPro	57-1607-U4D	+16/0.7	2.5mm x 5.5mm F 2	120@60	19	No	3.6 x 2.7 x 3.6	6'/6'	1.3	UL	4.95	4.49
174845	ReliaPro	GQ-ADT57250-0044	+24/1.0	2.1mm x 5.5mm F 2	120@60	24	No	3.4 x 2.6 x 2.2	6'/6'	2.6	UL	14.95	13.95
139096	ReliaPro	EHU240120	+24/1.2	2.1mm x 5.5mm F 2	120@60	29	No	4.4 x 3.1 x 2.6	6'/6'	2.5	—	15.95	14.49
2197572	ReliaPro	EHU240200	+24/2.0	2.1mm x 5.5mm F 2	120@60	48	No	4.4 x 3.1 x 2.6	6'/6'	2.5	—	19.95	17.95
2-Wire AC Input – Regulated Switching Table-Top – Single Output												★Web Code: DDZ	
1940299	Mean Well	GS18B05-P1J	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.1 x 2.1 x 1.3	4'/1	0.5	UL/CUL/TUV/CE	$14.95	$13.49
1940328	Mean Well	GS18B12-P1JT	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.1 x 2.1 x 1.3	6'/6'	0.5	UL/CUL/TUV/CE	14.95	13.49
2167445	ReliaPro	ADPV16	+12/3.0	2.1mm x 5.5mm F 2	100-240@50-60	36	No	3.6 x 1.6 x 1.1	5'/1	0.4	UL/CUL/CE/CSA	19.95	17.95
2155321	ReliaPro	PA1045-120T2B375-APF02	+12/3.75	2.1mm x 5.5mm F 2	90-264@50-60	45	Yes	4.3 x 2.1 x 1.2	6'/1	0.5	UL/CUL/TUV/CE	22.95	20.95
1940521	Mean Well	GS25B15-P1J	+15/1.66	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.1 x 2.1 x 1.3	6'/1	0.5	UL/CUL/TUV/CE	12.95	11.49
1940547	Mean Well	GS25B24-P1J	+24/1.04	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.1 x 2.1 x 1.3	6'/1	0.5	UL/CUL/TUV/CE	12.95	11.49
221613	Mean Well ✓	P30B-6P2JT	+24/1.12	2.1mm x 5.5mm F 2	100-240@50-60	27	Yes	4.3 x 2.6 x 1.4	6'/6'	0.8	UL/CUL/TUV/CE	14.95	13.49
1707139	Mean Well	ES25B48-P1J	+48/0.52	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.1 x 2.1 x 1.3	6'/1	0.4	UL/CUL/TUV/CE	11.95	10.95
2-Wire AC Input – Regulated Switching Table-Top – Triple Output												★Web Code: TTO	
196138	DVE	DSA-0283A	+5/1, +12/1.49 -5/0.43 (Requires 20% min. load on all outputs)	5-pin DIN M	100-240@47-63	23	No	4.9 x 2.7 x 1.5	6'/1	0.8	UL/CSA/TUV	$7.95	$6.95
3-Wire AC Input – Regulated Switching Table-Top – Single Output												★Web Code: DDZ	
309876	Arndt Electronics	GI12-USO520	+5/2.0	2.1mm x 5.5mm F 2	100-240@50-60	10	No	2.6 x 1.9 x 1.3	6'/2	0.4	UL/CUL/TUV/CE	$9.95	$8.95
196218	GlobTek	GT-21089-1305T3	+5/2.0	2.1mm x 5.5mm F 2	120-240@50-60	10	No	3.4 x 1.9 x 1.3	6'/2	0.4	UL/CUL/TUV/CE	17.95	15.95
1955642	Delta	ADP-105B	+5/2.0	2.1mm x 5.5mm F 2	100-240@50-60	10	No	3.3 x 1.9 x 1.2	6'/2	0.3	UL/CUL/CE	8.95	7.95
2115506	OEM	SYS1089-1305-T3	+5/2.6	2.1mm x 5.5mm F 2	100-240@50-60	13	No	3.4 x 1.8 x 1.3	6'/2	0.3	UL/CUL/CE	6.95	5.95
1940387	Mean Well	GS18A05-P1J	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	15	Yes	3.7 x 2.1 x 1.4	4'/2	0.5	UL/CUL/TUV/CE	11.95	10.95
1940571	Mean Well	GS25A05-P1J	+5/4.0	2.1mm x 5.5mm F 2	100-240@50-60	20	Yes	3.7 x 2.1 x 1.4	4'/2	0.5	UL/CUL/TUV/CE	12.95	11.49
1952337	Mean Well	GS40A05-P1J	+5/5.0	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	4.9 x 2.0 x 1.2	4'/2	0.7	UL/CUL/TUV/CE	16.95	15.49
2202511	Switchbox	UP0301E-05P	+5/6.0	2.5mm x 5.5mm F 2	100-240@47-63	30	No	4.7 x 2.4 x 1.3	4'/2	0.5	UL/CUL/TUV/CE	24.95	22.95
2123266	Mean Well	GS60A05-P1J	+5/6.0	2.1mm x 5.5mm F 2	90-264@47-63	30	Yes	4.9 x 2.0 x 1.2	3.3'/2	0.7	UL/TUV/BSMI/CCC	17.95	15.95
320081	GlobTek	TR9CA6000LCP-Y	+5/6.0	2.5mm x 5.5mm F 2	100-240@50-60	30	Yes	4.7 x 2.4 x 1.3	6'/2	0.7	UL/CUL/TUV/CE	39.95	35.95
2144956	ReliaPro	GQ65-060330-EI	+6/3.3	2.1mm x 5.5mm F 2	100-240@50-60	20	No	3.6 x 2.0 x 1.3	6'/3	0.3	UL/TUV/CE	14.95	13.49
206529	Mean Well	GS40A07-P1J	+7.5/5.34	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	4.9 x 2.0 x 1.3	4'/2	1.5	UL/CUL/TUV/CE	16.95	15.49
2103118	Mean Well	GS60A07-P1J	+7.5/6.0	2.1mm x 5.5mm F 2	90-264@47-63	45	Yes	4.9 x 2.0 x 1.2	3.3'/2	0.7	UL/CUL/TUV/CE	17.95	15.95
2173036	Phihong	PSA18U-090	+9/2.0	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.9 x 2.2 x 1.2	5'/2	0.5	UL/CUL/TUV/CE	9.95	8.95
1940408	Mean Well	GS18A09-P1J	+9/2.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/2	0.6	UL/CUL/TUV/CE	11.95	10.95
1940598	Mean Well	GS25A09-P1J	+9/2.77	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	3.7 x 2.1 x 1.4	6'/2	0.4	UL/CUL/TUV/CE/CEC	12.95	11.49
2102916	Mean Well	GS40A09-P1J	+9/4.5	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	3.3'/2	0.6	UL/CUL/TUV/CE	16.95	15.49
1952361	Mean Well	GS60A09-P1J	+9/6.0	2.1mm x 5.5mm F 2	90-264@47-63	54	Yes	4.9 x 2.0 x 1.3	4'/2	0.7	UL/CUL/TUV/CE	17.95	15.95
2150782	ReliaPro	GQ65-120100EI	+12/1.0	2.1mm x 5.5mm F 2	100-240@50-60	12	No	3.6 x 1.9 x 1.3	6'/2	0.3	TUV(US)/TUV/CE	11.95	10.95
1954244	Mean Well	GS15A-3P1J	+12/1.25	2.1mm x 5.5mm F 2	90-264@47-63	15	No	3.9 x 2.3 x 1.3	6'/2	0.4	UL/CUL/TUV/CE	15.95	14.49
228988	Phihong	PSA18U-120DIN	+12/1.5	3-pin DIN M	100-240@47-63	18	No	3.9 x 2.2 x 1.2	4'/2	0.7	UL/CUL/TUV/CE	19.95	17.95

* See accessory table-top power cord chart on page 6 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord

✓CEC Equivalent available. Add a "C" before part number for CEC version. CEC

★*For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box*

AC-to-DC Regulated Switching Table-Top Power Supplies

We are happy to change the power plug on any listed table-top power supply to a connector of your choice (see pg 10) for just $2.50 ea. Overmolding also available @ $4.00 ea. A 100 pc. minimum order applies.

2079357

2218151

2099294

2139006

2202554

◆ Polarity 1 (center negative)
Polarity 2 (center positive)

Female (F)

Female Right Angle

DIN (M)

4-Pin Molex

See page 13 for International Power Cords

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD/F = female; M = male; Polarity ◆	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10
3-Wire AC Input – Regulated Switching Table-Top – Single Output (Continued)												★Web Code: DDZ	
1940416	Mean Well	GS18A12-P1JU	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/6'	0.5	UL/CUL/TUV/CE	$14.95	$13.49
2213915	Mean Well **	GSM18B12-P1J	+12/1.5	2.1mm x 5.5mm F 2	80-264@47-63	18	Yes	3.1 x 2.1 x 1.3	6'/1	0.4	UL/CUL/CE/FCC/TUV/CB	13.95	12.49
2135507	SPC Technology	SA121A6F-11	+12/1.6	2.1mm x 5.5mm F 2	100-250@47-63	19	No	3.2 x 2.2 x 1.9	6'/2	0.2	UL/CUL/TUV/CE	8.95	7.95
2197601	Delta	EADP-24KBB	+12/2.0	2.1mm x 5.5mm F 2†	100-240@50-60	24	No	4.7 x 2.0 x 1.2	7'/2	0.5	UL/CUL/CE	9.95	8.95
2190047	Mean Well	GS25A12-P1J	+12/2.08	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	3.7 x 2.1 x 1.4	4'/2	0.5	UL/CUL/TUV/CE	11.95	10.95
1940601	Mean Well	GS25A12-P1JU	+12/2.08	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	4'/6'	0.5	UL/CUL/TUV/CE	14.95	13.49
2213991	Mean Well **	GSM25B12-P1J†	12/2.08	2.1mm x 5.5mm F 2	80-264@47-63	25	Yes	3.1 x 2.1 x 1.3	6'/1	0.5	UL/CUL/CE/FCC/TUV/CB	13.95	12.49
2154978	ReliaPro	GQ65120250-E1	+12/2.5	2.5mm x 5.5mm F 2	100-240@50-60	30	No	3.6 x 1.9 x 1.3	6'/2	0.5	TUV(US)/CE	14.95	13.49
2214070	Mean Well **	GSM36B12-P1J	+12/3.0	2.1mm x 5.5mm F 2	80-264@47-63	36	Yes	3.1 x 2.1 x 1.3	6'/1	0.5	UL/CUL/CE/FCC/TUV/CB	15.95	14.49
2129158	Sparkle Power	FSP040-DGAA1	+12/3.33	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	4.3 x 2.0 x 1.2	5'/2	0.5	UL/CUL/TUV/CE	15.95	14.49
1952345	Mean Well	GS40A12-P1J	+12/3.34	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.3	4'/2	0.7	UL/CUL/TUV/CE	16.95	15.49
2079357	Mean Well	GS40A12-P1M	+12/3.34	2.5mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.3	4'/2	0.7	UL/CUL/TUV/CE	16.95	15.49
2214150	Mean Well **	GSM40B12-P1J	+12/3.34	2.1mm x 5.5mm F 2	80-264@47-63	40	Yes	1.3 x 1.9 x 5.0	3.3'/1	0.6	UL/CUL/CE/FCC/TUV/CB	18.95	17.49
1940264	ReliaPro	EA1050E	+12/3.5	2.1mm x 5.5mm F 2	100-240@50-60	42	Yes	4.7 x 2.4 x 1.4	4'/2	0.6	UL/CUL/TUV/CE	15.49	13.95
1940272	ReliaPro	GQ65-120416-E1	+12/4.16	2.1mm x 5.5mm F 2	100-240@50-60	50	Yes	4.5 x 1.9 x 1.4	4'/2	0.6	TUV(US)/CE	15.95	14.95
2158485	Power-One	3F42050	+12/4.2	2.1mm x 5.5mm F 2†	100-240@50-60	50	Yes	4.7 x 2.4 x 1.4	6'/6'	1.2	UL/CUL/CE	11.95	10.95
2129609	Phihong	PSA65U-120	+12/5.0	2.1mm x 5.5mm F 2	100-240@50-60	60	No	5.9 x 2.8 x 1.5	3.3'/2	1.0	UL/CUL/CE	14.95	13.49
1952370	Mean Well	GS60A12-P1J	+12/5.0	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 1.9 x 1.2	4'/2	0.7	UL/CUL/TUV/CE	17.95	15.95
2218151	Net Gear	AD81801F	+12/5.0	2.5mm x 5.5mm F 2	100-240@50-60	60	No	4.6 x 2.4 x 1.4	6'/2	0.6	UL/CUL/CE	16.95	15.49
2214230	Mean Well **	GSM60B12-P1J	+12/5.0	2.1mm x 5.5mm F 2	80-264@47-63	60	Yes	1.3 x 1.9 x 5.0	3.3'/1	0.7	UL/CUL/CE/FCC/TUV/CB	21.95	19.95
2099420	Sparkle Power	AD060DBAEI-J25R	+12/5.0	2.5mm x 5.5mm F 2†	100-240@50-60	60	Yes	4.3 x 2.4 x 1.2	5'/2	0.5	UL/CUL/TUV/CE	22.95	20.49
2078291	Mean Well	GS90A12-P1M	+12/6.67	2.5mm x 5.5mm F 2	100-240@50-60	80	Yes	5.7 x 2.3 x 1.3	4'/2	0.9	UL/CUL/TUV/CE	28.95	25.95
2210466	Mean Well **	GSM90B12-P1M	+12/6.67	2.5mm x 5.5mm F 2	80-264@47-63	80	Yes	5.7 x 2.4 x 1.3	3.3'/1	1.0	UL/CUL/CE/FCC/TUV	31.95	28.95
221429	Mean Well	U65S105-P2JU	+12/6.7	2.1mm x 5.5mm F 2	100-240@50-60	80	Yes	6.6 x 3.1 x 1.8	6'/6'	2.0	UL/CUL/TUV/CE	41.95	38.95
2129211	Mean Well	GS120A12-R7B	+12/8.5	4-pin DIN M	85-264@47-63	102	Yes	6.6 x 2.6 x 1.4	4'/2	1.4	UL/CUL/TUV/CE	42.95	38.95
2214281	Mean Well **	GSM120B12-R7B	+12/8.5	4-pin DIN M	80-264@47-63	102	Yes	6.6 x 2.7 x 1.4	3.3'/1	1.3	UL/CUL/CE/FCC/TUV/CB	49.95	44.95
2205165	ReliaPro	EA11011H-120	+12/10	4-pin DIN M	100-240@47-63	120	Yes	5.4 x 2.3 x 1.3	4'/2	2.4	UL/CUL/CB/CE	39.95	36.95
2122183	Mean Well	GS160A12-R7B	+12/11.5	4-pin DIN M	85-264@47-63	138	Yes	6.9 x 2.8 x 1.4	4'/2	0.9	UL/TUV/BSMI/CCC	50.95	45.95
2099294	Mean Well	GS220A12-R7B	+12/15	4-pin DIN M	90-264@47-63	180	Yes	8.3 x 3.4 x 1.8	3.3'/2	1.0	UL/CUL/TUV/CE	74.95	67.95
2139006	ENG Electric	3G-301DN13	+13.5/2.2	4-pin Molex	100-240@50-60	30	No	4.6 x 1.9 x 1.2	2'6"/3	0.8	UL/CUL	7.95	6.95
1940432	Mean Well	GS18A15-P1J	+15/1.2	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/2	0.5	UL/CUL/TUV/CE	10.95	9.95
1940619	Mean Well	GS25A15-P1J	+15/1.66	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6'/2	0.5	UL/CUL/TUV/CE	12.95	11.49
2202554	Phihong	PSA30U-150	+15/2.0	2.1mm x 5.5mm F 2†	100-240@47-63	30	No	4.4 x 2.4 x 1.4	6'/2	0.5	UL/TUV/CSA	14.95	13.49
221577	Mean Well	GS40A15-P1J	+15/2.67	2.1mm x 5.5mm F 2	90-264@50-60	40	Yes	4.9 x 2.0 x 1.3	6'/2	0.8	UL/CUL/TUV/CE	16.95	15.49
2171559	Mean Well	GS40A15-P1JU	+15/2.67	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	3.3'/6'	0.6	UL/CUL/TUV/CE	19.95	17.95
1954295	Mean Well	GS60A15-P1J	+15/4.0	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	4'/2	0.7	UL/CUL/TUV/CE	17.95	15.95
2078320	Mean Well	GS90A15-P1M	+15/6.0	2.5mm x 5.5mm F 2	100-240@50-60	90	Yes	5.7 x 2.3 x 1.3	3'3"/2	0.8	UL/CUL/TUV/CE	24.95	22.95
2210474	Mean Well **	GSM90B15-P1M	+15/6.0	2.5mm x 5.5mm F 2	80-264@47-63	90	Yes	5.7 x 2.4 x 1.3	3.3'/1	1.0	UL/CUL/CE/FCC/TUV	31.95	28.95
2100785	Mean Well	GS220A15-R7B	+15/13.4	4-pin DIN M	90-264@47-63	201	Yes	8.3 x 3.3 x 1.8	3'/2	0.9	CE/CUL/TUV/UL	74.95	67.95
2145107	SYN Electronics	SYS-1097-4018	+18/2.2	2.1mm x 5.5mm F 2	100-240@47-63	40	Yes	4.7 x 2.4 x 1.3	4"/2	0.7	UL/TUV/CE	10.95	9.95
2102756	Mean Well	GS40A18-P1J	+18/2.22	2.1mm x 5.5mm F 2	90-264@47-63	39.6	Yes	5.0 x 2.0 x 1.3	6'/2	0.6	UL/CUL/TUV/BSMI/CCC/CB/FCC/CE	16.95	15.49
2154951	Mean Well	GS60A18-P1JU	+18/3.33	2.1mm x 5.5mm F 2	90-264@50-60	60	Yes	4.9 x 2.0 x 1.2	6'/6'	0.8	UL/CUL/TUV/CE	22.95	20.95
2101841	Mean Well	GS90A19-P1M	+19/4.74	2.5mm x 5.5mm F 2	90-264@47-63	90	Yes	5.7 x 2.3 x 1.3	4'/2	0.9	UL/TUV/BSMI/CCC	28.95	25.95
1940459	Mean Well	GS18A24-P1J	+24/0.75	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/2	0.5	UL/CUL/TUV/CE	11.95	10.95
2213940	Mean Well **	GSM18B24-P1J	+24/0.75	2.1mm x 5.5mm F 2	80-264@47-63	18	Yes	3.1 x 2.1 x 1.3	6'/1	0.4	UL/CUL/CE/FCC/TUV/CB	13.95	12.49
2190346	Mean Well	GS25A24-P1J	+24/1.04	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	3.7 x 2.1 x 1.4	6'/2	0.5	UL/CUL/TUV/CE	11.95	10.95

* See accessory table-top power cord chart on page 6 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord

** Medical (2-wire)

† Right angle

CEC

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

AC-to-DC Regulated Switching Table-Top Power Supplies

We are happy to change the power plug on any listed table-top power supply to a connector of your choice (see pg 10) for just $2.50 ea. Overmolding also available @ $4.00 ea. A 100 pc. minimum order applies.

◆ Polarity 1 ⊕—●—⊖ (center negative)
Polarity 2 ⊖—●—⊕ (center positive)

See page 13 for International Power Cords

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD/F = female; M = male; Polarity ◆	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10
3-Wire AC Input – Regulated Switching Table-Top – Single Output (Continued)												★Web Code: DDZ	
1940635	Mean Well	GS25A24-P1JU	+24/1.04	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6'/6'	0.5	UL/CUL/TUV/CE	$13.95	$12.95
2214029	Mean Well **	GSM25B24-P1J	+24/1.04	2.1mm x 5.5mm F 2	80-264@47-63	25	Yes	3.1 x 2.1 x 1.3	6'/1	0.4	UL/CUL/CE/FCC/TUV/CB	13.95	12.49
380577	Mean Well	GS25A24-P1MU	+24/1.04	2.5mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6'/6'	0.6	UL/CUL/TUV/CE	19.95	17.95
2172789	ReliaPro	EA1030D1	+24/1.25	2.1mm x 5.5mm F 2	100-240@50-60	30	Yes	3.8 x 1.7 x 1.2	6'/6'	0.4	UL/CUL/TUV/CE	14.95	13.49
2214109	Mean Well **	GSM36B24-P1J	+24/1.5	2.1mm x 5.5mm F 2	80-264@47-63	36	Yes	3.1 x 2.1 x 1.3	6'/1	0.5	UL/CUL/CE/FCC/TUV/CB	15.95	14.49
1952353	Mean Well	GS40A24-P1J	+24/1.67	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	6'/2	0.7	UL/CUL/TUV/CE	16.95	15.49
2214184	Mean Well **	GSM40B24-P1J	+24/1.67	2.1mm x 5.5mm F 2	80-264@47-63	40	Yes	1.3 x 1.9 x 5.0	5'/1	0.6	UL/CUL/CE/FCC/TUV/CB	18.95	17.49
1537256	ReliaPro	OH-1048A2401700U-U	+24/1.7	2.5mm x 5.5mm F 2	90-264@47-63	40	Yes	4.5 x 2.0 x 1.3	6'/2	0.5	UL/CUL/CE	17.49	15.49
1942788	ReliaPro	EA1050B-240	+24/2.5	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	4.5 x 2.0 x 1.3	6'/2	1.8	UL/CUL/TUV/CE	17.49	15.49
1952214	Mean Well	GS60A24-P1J	+24/2.5	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.3	6'/2	0.7	UL/CUL/TUV/CE	17.95	15.95
2217991	Globtek	TR9CI2500LCP-Y	+24/2.5	2.5mm x 5.5mm F 2	100-240@50-60	60	Yes	4.7 x 2.4 x 1.3	6'/2	0.7	UL/CUL/TUV/GS	15.95	14.95
1950913	ReliaPro	EA1050B-240	+24/2.5	2.5mm x 5.5mm F 2	100-240@50-60	60	Yes	4.8 x 2.4 x 1.4	6'/2	1.8	UL/CUL/TUV/CE	19.95	18.95
2214264	Mean Well **	GSM60B24-P1J	+24/2.5	2.1mm x 5.5mm F 2	80-264@47-63	60	Yes	1.3 x 1.9 x 5.0	5'/1	0.7	UL/CUL/CE/FCC/TUV/CB	21.95	19.95
2172797	ReliaPro	EA11001D-240	+24/3.75	2.5mm x 5.5mm F 2	100-240@50-60	90	Yes	5.4 x 2.3 x 0.4	4'/2	0.9	UL/CUL/TUV/CE	27.95	25.49
2078338	Mean Well	GS90A24-P1M	+24/3.75	2.5mm x 5.5mm F 2	100-240@50-60	90	Yes	5.9 x 2.3 x 1.2	4'/2	0.9	UL/CUL/TUV/CE	28.95	25.95
2210491	Mean Well **	GSM90B24-P1M	+24/3.75	2.5mm x 5.5mm F 2	80-264@47-63	90	Yes	5.7 x 2.4 x 1.3	4'/1	1.0	UL/CUL/CE/FCC/TUV	31.95	28.95
2135208	Mean Well	GS120A24-P1M	+24/5.0	2.5mm x 5.5mm F 2	85-264@47-63	120	Yes	6.6 x 2.6 x 1.4	4'/2	1.4	UL/CUL/TUV/CE	42.95	38.95
2214310	Mean Well **	GSM120B24-R7B	+24/5.0	4-pin DIN M	80-264@47-63	120	Yes	6.6 x 2.7 x 1.4	4'/1	1.3	UL/CUL/CE/FCC/TUV/CB	49.95	44.95
2122212	Mean Well	GS160A24-R7B	+24/6.67	4-pin DIN M	85-264@47-63	160	Yes	6.9 x 2.8 x 1.4	4'/2	1.5	UL/CUL/TUV/CE	50.95	45.95
2099286	Mean Well	GS220A24-R7B	+24/9.2	4-pin DIN M	90-264@47-63	220	Yes	8.3 x 3.4 x 1.8	3.3'/2	2.4	UL/CUL/TUV/CE	74.95	67.95
2188191	Mean Well	GS280A24-C4P	+24/11.7	4-pin rectangular	90-264@47-63	280	Yes	8.7 x 3.7 x 1.8	3'/2	2.8	†See below	89.95	79.95
1940643	Mean Well	GS25A28-P1J	+28/0.89	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6'/2	0.7	UL/CUL/TUV/CE	12.95	11.49
1940651	Mean Well	GS25A48-P1J	+48/0.52	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6'/2	0.5	UL/CUL/TUV/CE	12.95	11.49
172065	Mean Well	SPU50-9U	+48/1.25	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	5.6 x 2.9 x 1.7	6'/6'	1.3	UL/CUL/TUV/CE	14.95	13.95
1952396	Mean Well	GS60A48-P1JU	+48/1.25	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	6'/6'	0.7	UL/CUL/TUV/CE	22.95	20.95
2218100	Netgear	VAN90C-480B	+48/1.45	2.1mm x 5.5mm F 2	100-240@50-60	70	No	5.9 x 2.4 x 1.2	6'/2	0.9	UL/CUL/CE	16.95	15.49
2210503	Mean Well **	GSM90B48-P1M	+48/1.87	2.5mm x 5.5mm F 2	80-264@47-63	90	Yes	5.7 x 2.4 x 1.2	4'/1	1.0	UL/CUL/CE/FCC/TUV	31.95	28.95
2122221	Mean Well	GS160A48-R7B	+48/3.34	4-pin DIN M	85-264@47-63	160	Yes	6.9 x 2.8 x 1.4	4'/2	0.9	UL/TUV/BSMI/CCC	50.95	45.95
2100945	Mean Well	GS220A48-R7B	+48/4.6	4-pin DIN M	90-264@47-63	221	Yes	8.3 x 3.3 x 1.8	3'/2	0.9	CE/CUL/TUV/UL	74.95	67.95
3-Wire AC Input – Regulated Switching Table-Top – Double & Triple Output												★Web Code: TDO	
228988	Phihong	PSA18U-120	+12/1.5	3-pin DIN M	100-240@50-60	18	No	3.8 x 2.2 x 1.2	5'/2	1.1	UL/CUL/TUV	$19.95	$17.95
196270	ReliaPro	PSU25A13	+5/2.5, +12/1.0	4-pin mini DIN M	100-240@47-63	25	No	4.2 x 2.6 x 1.4	6'/4'	1.2	UL/CUL/TUV/CE	34.95	31.49
221720	Mean Well	P25A14E-R1BU	+5/2.5, +15/0.3 -15/0.3	5-pin DIN M	100-240@50-60	25	Yes	4.3 x 2.6 x 1.4	6'/6'	0.8	UL/CUL/TUV/CE	29.95	26.95
190960	Mean Well	P25A13D-R1B	+5/2.5, +12/0.8 -12/0.3	5-pin DIN M	100-240@50-60	26	Yes	4.1 x 2.6 x 1.4	6'/2	1.1	CUL/TUV/CE	29.95	26.95
237367	Mean Well	P50A14E-R1B	+5/3.5, +15/1.2 -15/0.3	5-pin DIN M	100-240@47-63	42	Yes	5.8 x 3.0 x 1.7	4'/2	1.2	UL/CUL/TUV/CE	44.95	39.95
2217844	Arndt Electronics	T40-9312A	+5/5.0, +12/1.2 -12/0.3	6-pin DIN M	100-240@50-60	43	No	6.0 x 3.3 x 1.9	4'/2	1.2	UL/CUL/TUV/CE	39.95	34.95
221702	Mean Well	P50A13D-R1BU	+5/4.0, +12/2.0 -12/0.5	5-pin DIN M	100-240@50-60	50	Yes	5.7 x 3.0 x 1.7	4'/6'	1.5	UL/CUL/TUV/CE	49.95	44.95

* See accessory table-top power cord chart on page 6 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord ** Medical (2-wire)
CEC † UL/CUL/PSE/TUV/BSMI/CCC/CB/FCC/CE

REGULATED SWITCHING TABLE TOP POWER SUPPLIES — BEST SELLERS

Part No.	Voltage	Current	Page	Price
196218	5VDC	2A	7	$17.95
1940408	9VDC	2A	7	11.95
1940264	12VDC	3.5A	8	15.49
1952370	12VDC	5A	8	17.95

Part No.	Voltage	Current	Page	Price
2205165	12VDC	10A	8	$39.95
1940619	15VDC	1.66A	8	12.95
1942788	24VDC	2.5A	9	17.49
2172797	24VDC	3.75A	9	27.95

★ *For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box*

Switchcraft® Male & Female Power Jacks

JAMECO ValuePro

★Web Code: BAM

Part No.	Mfr.	Product No.	Description Pin Dia. x OD	Dimensions H x W x D (mm)	Type/ Mount	Circuit/ Terminal	1	10	100
101194	ValuePro	PP024	1.3 x 3.5mm male	6.0 x 6.0 x 9.0	1/D	1/B	$.59	$.55	$.45
2202909	Arndt Electronics	163-0310	1.7 x 4.8mm male	41 x 10.3 Dia.	6/F	3/A	.79	.69	.59
2168114	Adam Tech	ADC-002A-1	2.0 x 6.4mm male	11.0 x 9.0 x 14.3	2/D	1/A	.39	.35	.29
2188625	Arndt Electronics	PJ2155	2.1 x 5.5mm male	10.9 x 9.0 x 14.0	2/D	1/A	.39	.35	.29
101178	ValuePro	PP014	2.1 x 5.5mm male	10.9 x 9.0 x 14.5	2/D	1/A	.39	.35	.29
101179	ValuePro	PP014	2.1 x 5.5mm male	10.9 x 9.0 x 14.5	2/D	1/A	.45	.39	.35
137673	ValuePro	PP013	2.1 x 5.5mm male	10.9 x 9.0 x 14.5	3/D	4/A	.45	.39	.35
151590	ValuePro	DPJ-02IA	2.1 x 5.5mm male	18.0 x 12.6 Dia.	4/C†	1/A	.89	.79	.69
151555	ValuePro	DPJ-026[2]	2.1 x 5.5mm male	21.0 x 8.0 Dia.	5/C	1/A	1.75	1.59	1.39
281851	Switchcraft	722A[2]	2.1 x 5.5mm male	21.0 x 8.0 Dia.	7/C	1/A	4.95	4.49	3.95
159611	ValuePro	PJ1014A	2.1 x 5.5mm male	57.5 x 12.6 Dia.	6/F	3/A	1.75	1.59	1.39
2151136	ValuePro	HD2388C	2.1 x 5.5mm male	12.4 x 7.7 Dia.	8/C*	3/A	1.19	.99	.89
2144690	ValuePro	L5225	2.1 x 5.5mm male	11.0 x 9.1 x 14.7	13/D	1/A	.35	.29	.19
2153908	Velleman	CD021**	2.1 x 5.5mm male	13 x 14.5 x 40	17/C	4/C	4.95	4.69	4.45
2210677	ValuePro	WTJ-020-37A	2.1 x 6.4mm male	14.5 x 9 x 10.7	3/D	1/B	.69	.65	.55
207714	ValuePro	HEC0470	2.5 x 5.5mm male	11.0 x 9.0 x 14.5	2/D	1/B	.55	.49	.39
101187	ValuePro	PP014A	2.5 x 5.5mm male	11.0 x 9.0 x 14.5	2/D	1/A	.55	.49	.45
151563	ValuePro	DPJ-026A[2]	2.5 x 5.5mm male	15.1 x 8.0 Dia.	5/E	1/A	1.49	1.35	1.19
159506	ValuePro	PJ1015A	2.5 x 5.5mm male	57.5 x 12.6 Dia.	6/F	3/A	1.49	1.35	1.19
202358	ValuePro	HD2388	2.5 x 5.5mm male	12.4 x 7.7 Dia.	8/C*	3/A	1.19	.99	.89
281842	Switchcraft	712A[2]	2.5 x 5.5mm male	15.8 x 7.5 Dia.	7/C	1/A	4.95	4.49	3.95
297553	Switchcraft	PC712A[2]	2.5 x 5.5mm male	23.3 x 11.0 Dia.	9/D	1/A	3.49	2.49	1.95
2144745	Arndt Electronics	J25M	2.5 x 5.5mm male	11.1 x 8.9 x 13.4	14/C	1/A	.49	.39	.29
2153887	ValuePro	CD017	2.5 x 5.5mm male	13 x 14.5 x 40	14/C	4/F	5.49	4.95	4.49
2168122	Adam Tech	ADC-002A-2	2.5 x 6.4mm male	11.0 x 9.0 x 14.3	2/D	1/A	.59	.55	.49
1773996	Switchcraft	MDPC2ARA	2.5mm female	7.9 x 8.7 x 12.7	15/D	4/B	2.95	2.75	2.49
297035	Switchcraft	142A	3.5mm female	11.1 x 9.5 x 15.8	16/C	4/A	2.49	2.25	1.95
101143	ValuePro	PJ0352[1]	3.5mm female	10.0 x 10.0 x 18.5	10/E	2/A	.49	.45	.39
109496	ValuePro	PJ035PM[1]	3.5mm female	10.5 x 9.0 x 20.0	11/C	2/A	.49	.45	.39
165730	ValuePro	PJ0354R[1]	3.5mm female	15.5 x 5.9 Dia.	12/C	3/A	.79	.69	.59
2183218	ValuePro	M6HDWR	Additional Panel Mounting Hardware indicated with 1				.69	.59	.49
281852	Switchcraft	5/16-32HDWR	Additional Panel Mounting Hardware indicated with 2				.69	.59	.49

† Center offset *Plastic **Screw terminals

Terminals	Code
Solder eyelet	A
PC board	B
Screw term	C

Mounting	Code
Panel	C
PCB	D
Panel & PCB	E
Cable	F







Switchcraft® AC/DC Power Plugs & Adapters

JAMECO ValuePro

★Web Code: MFP

Part No.	Mfr.	Product No.	Fig.	Description (Barrel) Plug ID x OD x L (mm)	Strain Relief ID x L (mm)	1	10	100
71192	ValuePro	PP137	1	**F** plug, 1.3 x 3.5 x 9.5	4.1 x 12 (black)	$.79	$.69	$.65
1537395	ValuePro	PL-005	2	**F** plug, 1.3 x 3.5 x 9.5 (right angle)	2.8 x 11 (black)	.89	.79	.69
191484	ValuePro	PP049W	1	**F** plug, 2.1 x 5.5 x 9.0	4.6 x 12.5 (white)	.89	.79	.69
2004890	ValuePro	PP049S	1	**F** plug, 2.1 x 5.5 x 9.5	4.5 x 12.5 (black)	.89	.79	.69
28760	ValuePro	PP049	1	**F** plug, 2.1 x 5.5 x 9.5 (P205)	4.1 x 12 (black)	.89	.79	.69
2201990	Arndt Electronics	CS1021-HP-12	3	**F** plug, 2.1 x 5.5 x 12	8.3 x 22 (black)	1.49	1.25	1.09
2179358	ValuePro	27-1136A	7	**F** plug, 2.1 x 5.5 x 9.5 (locking)	6.0 x 25 (black)	2.95	2.49	1.95
2145123	ValuePro	CS1021-A-12MM	1	**F** plug, 2.1 x 5.5 x 12	4.3 x 12 (black)	.89	.79	.69
138587	ValuePro	PL-007	2	**F** plug, 2.1 x 5.5 x 12 (right angle)	2.8 x 11 (black)	.89	.79	.65
147329	ValuePro	PP049L	1	**F** plug, 2.1 x 5.5 x 14 (P205L)	4.3 x 12 (black)	.89	.79	.65
2153916	Velleman	CD022	9	**F** plug, 2.1 x 5.5 x 37 (screw term)	—	4.49	4.25	4.05
190538	ValuePro	PP109S	1	**F** plug, 2.5 x 5.5 x 9.5	4.7 x 13 (black)	.89	.79	.65
281877	Switchcraft	760	3	**F** plug, 2.5 x 5.5 x 9.5	5.5 x 25 (black)	3.95	3.59	3.25
28768	ValuePro	PP109	1	**F** plug, 2.5 x 5.5 x 9.5 (P206)	4.7 x 13 (black)	.89	.79	.65
2179366	ValuePro	27-1136B	7	**F** plug, 2.5 x 5.5 x 9.5 (locking)	6.0 x 25 (black)	2.95	2.49	1.95
2145115	ValuePro	CS1021-B-12MM	1	**F** plug, 2.5 x 5.5 x 12	4.3 x 12 (black)	.89	.79	.69
147336	ValuePro	PP109L	1	**F** plug, 2.5 x 5.5 x 14 (P206L)	4.2 x 12 (black)	.89	.79	.69
168242	ValuePro	PP109N	3	**F** plug, 2.5 x 5.5 x 14	3.9 x 22 (black)	.89	.79	.69
2099163	ValuePro	PL-008	2	**F** plug, 2.5 x 5.5 x 9.5 (right angle)	2.8 x 11 (black)	.95	.85	.75
2153895	Velleman	CD018	9	**F** plug, 2.5 x 5.5 x 37 (screw term)	—	4.49	4.25	4.05
101135	ValuePro	JR-1020	4	**M** plug, — x 2.5 x 11 (mono)	4.3 x 13 (black)	.69	.59	.49
231176	ValuePro	AP-340	11	**M** plug, — x 3.5 x 14 (stereo)	4.3 x 13.5 (black)	.79	.69	.55
231167	ValuePro	AP-343	10	**M** plug, — x 3.5 x 14 (stereo)	4.4 x 13 (metal)	1.49	1.25	.99
231160	ValuePro	PJ1035	5	**M** plug, — x 3.5 x 14 (mono)	4.8 x 13.5 (metal)	1.49	1.25	.99
101152	ValuePro	PJ1035	4	**M** plug, — x 3.5 x 14.5 (mono)	4.0 x 13 (black)	.69	.59	.49
2200954	ValuePro	JR1037	8	**M** plug, — x 3.5 x 14.5 (stereo)	4.5 x 12 (black)	1.95	1.75	1.49
2112989	ValuePro	JP1828C	6	Adapter, 2.1mm **M** to 1.3mm **F** (1.3"L)	—	2.25	1.95	1.75
1953591	ValuePro	DCJ2.1-DCP2.5	6	Adapter, 2.1mm **M** to 2.5mm **F** (1.4"L)	—	1.49	1.25	1.09
1953604	ValuePro	DCJ2.5-DCP2.1	6	Adapter, 2.5mm **M** to 2.1mm **F** (1.4"L)	—	1.49	1.25	1.09

Fig. 1 Strain Relief

Fig. 2

Fig. 3 Hard Plastic Strain Relief

Fig. 4 (Mono) Strain Relief

Fig. 5 (Mono) Metal Strain Relief

Fig. 6

Fig. 7

Fig. 8 (Stereo)

Fig. 9

Fig. 10 (Stereo)

Fig. 11 (Stereo) Strain Relief

Call for additional OEM pricing on Wall Adapters!

We are happy to change any listed DC wall adapter power plug to a connector of your choice (left) for just $2.50 each or $4.00 each molded. A 100 pc. minimum order applies.

Wall Adapters on pages 2-6.

International Step-Down Transformers

★Web Code: RAL

Part No.	Cross Ref. No.	Fig.	Type	Volt Step	Primary Voltage	Secondary Voltage	Watts (VA)	Dimensions H"	W"	D"	Wt. (lbs.)	Pricing 1	5	25
221331	GIS-500	A	Isolation	—	120VAC	120VAC	500	4.69	3.75	6.00	16.0	$89.95	$79.95	$69.95
85016	GPC1003	B	Auto	Down	220VAC	120VAC	300	3.50	3.05	3.95	4.8	49.95	44.95	39.95
111851	GPC1005	B	Auto	Down	220VAC	120VAC	500	3.99	3.60	4.84	8.5	64.95	59.95	54.95

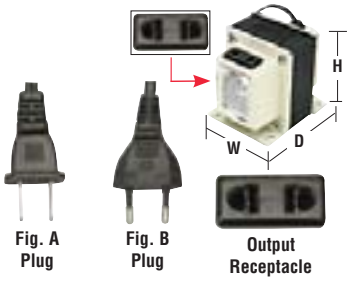

Fig. A Plug | Fig. B Plug | Output Receptacle

Quick-Connect Power Transformers

- Input voltage: 120/230VAC, 50-60Hz
- Terminals: quick-connect, solder

★Web Code: BAN

Part No.	Product No.	Triad Cross*	Input Voltage	Output Voltage	Watts (VA)	Size of Connect	Dimensions L"	W"	H"	Wt. (lbs.)	Pricing 1	10	100
101864	XFR2424Q	FD724	120/230VAC	24VCT @ 2.4A	57.6	0.141"	2.10	2.70	2.29	1.7	$10.95	$9.49	$8.95
104417	XFR3615Q	FD736	120/230VAC	36VCT @ 1.5A	54.0	0.141"	2.30	2.70	2.30	1.8	19.95	18.49	16.95

*Triad cross is for reference only



104387



Power Transformers (7.6 Watts to 288 Watts)

★Web Code: PTL

Power transformers have both single and dual-voltage inputs and center-tapped outputs. This makes them the perfect choice for power supply design or for use in transformer, rectifier and filter circuits.

- Primary: 120VAC or 120/230VAC, 50-60Hz

29226





120/230VAC 50-60Hz
Fig. 1



120VAC 50-60Hz
Fig. 2



120VAC 50-60Hz
Fig. 3



120VAC 50-60Hz
Fig. 4

Part No.	Product No.	Triad Cross#	Primary Color Code			Watts (VA)	Secondary Voltage	Secondary Color Code			Lead Type	Fig.	Dimensions L"	W"	H"	Wt. (lbs.)	Pricing 1	10	100
105524	XR082-91-R	—	Black	White*	Red	9.0	4.5VCT @ 1A	Blue	Black*	Blue	Wire	1	1.82	2.43	1.67	0.7	$11.95	$10.95	$9.95
102163	XFR6102	F314X	Black	Yellow*	Red	7.6	6.3VCT @ 1.2A	White	Black*	White	Wire	1	1.84	2.40	1.67	0.8	10.95	9.95	8.95
221400	P-8657	F218X	Black	—	Black	24.0	12VAC @ 2A	White	—	White	Wire	2	1.89	2.75	1.99	1.3	11.95	10.95	9.95
221356	P-8658	F219X	Black	—	Black	48.0	12VAC @ 4A	White	—	White	Wire	2	2.25	4.00	2.63	2.3	12.95	11.95	10.95
2188502	53260	—	Red	—	Green	36.0	12/5VCT @ 3A	Purple	Multi	Gray	Wire	4	2.36	2.34	1.94	1.3	8.95	7.95	6.95
104387	XFR1225Q	FD612	—	—	—	31.5	12.6VCT @ 2.5A	—	—	—	—	1	1.75	2.33	2.00	1.3	12.95	11.95	10.95
29226	XFR122	F44X	Yellow	—	Yellow	25.2	12.6VCT @ 2A	Blue	Red*	Black	Wire	3	2.41	2.79	1.99	1.5	13.95	12.49	10.95
102155	XFR1220	F344X	Black	Yellow*	Red	25.2	12.6VCT @ 2A	White	Black*	White	Wire	1	2.35	2.32	1.97	1.5	13.95	12.49	10.95
149771	XFR1240	F3181U	Black	Red*	Yellow	50.4	12.6VCT @ 4A	White	Black*	White	Wire	1	2.45	3.20	2.25	2.2	14.95	13.49	10.95
102121	XFR124	F181U	Black	—	Black	50.4	12.6VCT @ 4A	White	Black*	White	Wire	3	2.45	3.21	2.26	2.7	14.95	13.49	10.95
105532	XFR1810	—	Blue	Red*	Black	18.0	18VCT @ 1A	Yellow	Black*	Yellow	Wire	1	2.20	2.81	1.99	1.2	11.95	10.95	9.95
149957	XFR1820	—	Black	Red*	Yellow	36.0	18VCT @ 2A	White	Black*	White	Wire	1	2.25	3.15	2.71	1.8	12.95	11.95	10.95
112513	XFR242N	F229X	Black	—	Black	48.0	24VAC @ 2A	White	—	White	Wire	2	2.33	3.16	2.28	1.8	13.95	12.49	10.95
221382	P8396	—	Black	—	Black	9.6	24VCT @ 0.4A	White	Black*	White	Wire	3	1.63	2.80	1.97	0.6	10.95	9.95	8.95
102112	XFR2410	F346X	Black	Yellow*	Red	24.0	24VCT @ 1A	White	Black*	White	Wire	1	2.41	2.80	1.99	1.5	11.95	10.95	9.95
221373	P-8662	F192X	Black	—	Black	48.0	24VCT @ 2A	White	Black*	White	Wire	3	2.44	3.60	2.23	2.3	13.95	12.49	10.95
221365	P-8663 †	F193U	—	—	—	96.0	24VCT @ 4A	—	—	—	Lug	3	2.81	2.94	4.00	4.0	25.95	23.95	21.49
99654	XFR242	—	Red	—	Red	49.2	24.6VCT @ 2A	Blue	Yellow*	Blue	Wire	3	2.44	3.22	2.30	2.5	11.95	10.95	9.95
149797	XFR2820	F3185U	Black	Red*	Yellow	56.0	28VCT @ 2A	White	Black*	White	Wire	1	2.45	3.22	2.26	2.3	13.95	12.95	10.95

* Center tap # Triad cross is for reference only † Solder terminal

★Audio Transformers — Enter Web Code SAJ

★Variable Transformers — Enter Web Code MAR

★DC Power Plugs & Adapters — Enter Web Code MFP

5VDC @ 200mA Wall USB Adapter

- Works with digital camera, cell phones, PDA, MP3 and other USB devices
- LED indicator
- TUV/FCC approved
- Output voltage: 5VDC @ 200mA
- Input volt.: 100-240VAC @ 50/60Hz
- Size: 2.3"H x 1.8"W x 0.9"D
- Cable and tips use P/N 2081625 (see Web)

Part No.	Mfr. Part No.	1	10	50	100
2138636	SW013US-0500020US	$3.95	$3.59	$3.19	$2.79

For USB-A Power Cable with Interchangeable Tips, see Web

2081625

5VDC @ 500 & 1000mA USB Wall Adapters

- Works with digital camera, cell phones, PDA, MP3 and other USB devices
- Flip up prongs
- UL FCC approved
- Input voltage: 100-240VAC @ 50/60Hz
- Cable and tips use P/N 2081625 (see Web)

2197644

2197652

Part No.	Mfr. Part No.	Size (H x W x D)	1	10	50	100
2197644	FEF0500050AIBU*	2.2" x 1.5" x 1.1"	$4.95	$4.49	$3.95	$3.49
2197652	GFP051-0505-1*	2.5" x 1.9" x 0.9"	4.95	4.49	3.95	3.49
2210888	1128**	2.6" x 1.3" x 1.5"	6.95	6.49	5.95	5.49

*500mA **1000mA

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

Split-Bobbin Power Transformers (2.5 to 20VA)

★Web Code: LBK

JAMECO ValuePro

Non-concentrically wound w/ primaries & secondaries side-by-side providing low capacitive coupling.

- Primary: 120/230VAC, 50-60Hz
- PC terminal pin spacing for accurate placement



Part No.	Cross Ref. No.	Triad Cross*	Input Voltage	Watts (VA)	Individual Output	Parallel Output	Series Output	Dimensions L"	W"	H"	Wt. (lbs.)	Pricing 1	10	100
221292	DSW-312	FS12200	120/230	2.5	6.3V @ .20A	6.3V @ .40A	12.6VCT @ .20A	1.38	1.13	1.19	0.3	$6.95	$6.25	$5.59
2210941	DSW-612	—	120/230	20	6.3V @ 1.6A	6.3V @ 3.2A	12.6VCT @ 1.6A	2.25	1.88	1.44	0.8	7.95	6.95	5.95
102593	SPW-2304	FS24500	120/230	12	12V @ .50A	12V @ 1.0A	24VCT @ .50A	2.00	2.50	1.06	0.7	7.95	6.95	6.25

* Triad cross is for reference only

PC Mount Modem Coupling Transformer

JAMECO ValuePro

- Core type: EI-14
- Insulation resistance: 100MΩ
- ±20% impedance matching and DC resistance matching
- Hipot tested: 1000VAC • Vacuum wax impregnated

Part No.	Cross Ref. No.	Impedance (Ω) Primary	Impedance (Ω) Secondary	Resistance (Ω) Primary	Resistance (Ω) Secondary	Pricing 1	10	100
125357	XFR6006A14	600CT	600CT	65	55	$4.49	$3.95	$3.75

Audio Transformer

★Web Code: SAJ

- 300Hz to 3.4kHz
- Primary turns: 11486; Secondary turns: 1
- 200mW power rating



Part No.	Mfr. Part No.	Secondary Impedance	Primary Impedance	1	10	100
2210511	42TM013-RC	8Ω	1kΩ	$2.75	$2.49	$2.25

Data/Voice Coupling Transformer

- Turns ratio: 1:1 ±2% • DC current: 90mA
- Primary impedance: 600Ω; Secondary impedance: 600Ω
- Operating level: -45dBm to +10dBm



Part No.	Mfr. Part No.	Dimensions (L x W x H)	1	10	100
2210992	TTC-105	21.3mm x 16mm x 19mm	$4.49	$3.95	$3.59

PC Mount Audio Transformer

TRIAD

- Impedance matching: 10% over frequency range
- 6-pin PC mount • Output: 100mW
- Impedance (Ω): 600CT/600CT
- Primary DC Unbalance: 15mA

Part No.	Mfr. Part No.	Dimensions (W x D x H)	1	10	100
630459	TY-145P	13/16" x 9/32" x 5/8"	$5.95	$5.49	$4.49

Dual Adj. Regulated Power Supply Kit

JAMECO ValuePro

- Adjustable positive/negative supplies ±5 to ±15VDC, 175mA-750mA per supply
- LED on indicator • 48 piece kit • 120VAC input
- PC board construction • Difficulty level: intermediate



Part No.	Cross Ref. No.	Size (L x W x H)	Weight	1	5
20626	JE215	5.1" x 3.5" x 2.0"	2.1 lbs.	$29.95	$26.95

320VA Variable AC Transformer

JAMECO ValuePro

- Input voltage: 110VAC @ 50-60Hz • Max. current: 2.5A
- Matching input/output terminals: P/Ns 103668 & 109112 (disconnect .25" solderless terminals), see Web
- Panel mount • One-year warranty • Shaft length: 0.5"

Includes: 3 disconnect .25" solderless terminals

Part No.	Cross Ref. No.	Weight	Size (Dia. x H)	1	5	25
149324	PSV-203-R	2.5 lbs.	2.8" x 2.1"	$64.95	$59.95	$54.95

500 to 2000VA Variable Transformers

- Input: 110VAC or 220VAC
- Power: 500, 1000 or 2000VA
- Output: 0-240VAC
- Banana/screw input terminals
- Universal US/European output plugs
- Lighted on/off power switch

Part No.	Fuse	Size (W" x D" x H")	Wt. (lbs.)
121276	3A/250V (P/N 69439)	5.3 x 7.3 x 7.0	10.4
129008	5A/250V	9.4 x 6.5 x 7.7	14.8
152582	10A/250V (P/N 69462)	9.0 x 7.0 x 7.7	19.8

Part No.	Description	1	5
121276	500VA transformer	$139.95	$129.95
129008	1000VA transformer	169.95	154.95
152582	2000VA transformer	224.95	199.95

TOP SELLING POWER TRANSFORMERS

Part No.	Mfr.	Description	1	10
105524	ValuePro	4.5VCT @ 1A	$11.95	$10.95
221400	ValuePro	12VAC @ 2A	11.95	10.95
102155	ValuePro	12.6VCT @ 2A	13.95	12.49
221373	ValuePro	24VCT @ 2A	13.95	12.49

★Audio Transformers — Enter Web Code SAJ

★Variable Transformers — Enter Web Code MAR

300VA Isolation Transformer 120VAC to 120VAC

JAMECO ValuePro

- Input connector: 5.5' cord with 2-prong plug
- Output voltage: 120VAC @ 2.5A (isolated)
- Input voltage: 120VAC @ 60Hz
- Size: 3.2"W x 4.6"D x 4.2"H • Weight: 7.0 lbs.

Part No.	Cross Ref. No.	1	5	25
181315	ITR300	$49.95	$44.95	$39.95

Transformer Isolation

JAMECO ValuePro

- Output: 120VAC/4A, 60Hz
- Input: 110VAC 60Hz, 1800VA
- Primary: Current: 14 Amps fuse
  Direct AC#1: 110VAC 60Hz, 900VA
  Direct AC#2: 110VAC 60Hz, 900VA
- Secondary: Current: 7 Amps fuse
  Isolated AC#1: 110VAC 60Hz, 450VA
  Isolated AC#2: 110VAC 60Hz, 450VA
- Dimension: 5"L x 6"W x 9"H

Part No.	Mfr. Part No.	1	5	25
2214336	GRP-1200	$99.95	$89.95	$84.95

EMI Suppression Cores with Case

Reduce Electromagnetic (EMI) with a snap of these suppression cores around a power cord or data cord. Easy to install and an affordable way to reduce EMI without redesigning your product.

- Impedance at 100MHz between 75-225Ω min.
- Color: black

Round

Part No.	InDia.	OutDia.	Length	1	10	100
218174	.20"	.64"	1.15"	$1.25	$.99	$.75
217842	.34"	.78"	1.40"	1.49	1.25	.99
2202600	.38"	.87"	1.34"	1.49	1.25	.99
2081810	.38"	1.0"	0.65"	1.25	.99	.75

Laird *Square*

Part No.	InDia.	Width	Height	Length	1	10	100
2094987	.20"	.55"	.59"	1.40"	$.89	$.75	$.59
1952901	.25"	.70"	.77"	1.30"	.89	.75	.59

6kV-7.4kV High Voltage Power Supply

MADE IN USA

- Input voltage range: 113VAC to 132VAC
- Input lead wires: 22 AWG UL1015, 7.5"L; AC hot (black), AC COM (white), HV RTN (green) • Output voltage: 6.0kV to 7.4kVA
- Output lead wires: 22 AWG UL3239, 10" (pink)
- UL94V-0 rated encapsulant filled epoxy • Size: 3.0"L x 1.2"W x 1.0"H

Part No.	Mfr. Part No.	Description	1	10	50	100
2100136	CS2080A3	High voltage power supply	$5.95	$4.95	$3.95	$2.95

EMI Power Entry Filters (IEC Connector), Line Filters & AC Receptacles (IEC 320)

Fig. 1 (Faston)

Fig. 2



Fig. 3 (Right Angle)

Fig. 4 (Faston)

Fig. 5

Fig. 6

Fig. 7

Fig. 8



Fig. 9 (6-32 Panel Mount)



Fig. 10



Fig. 11



Fig. 12

Fig. 13

Fig. 14



Fig. 15

Fig. 16

Fig. 17



Fig. 18


Fig. 19

- Rated voltage: 115/250VAC • Operating frequency: 50/60Hz
- Hipot rating (one minute) line to ground: 2250VDC; line to line: 1450VDC

EMI Power Entry Filter: Maximum leakage current each line to ground:
@ 115VAC 60Hz: 0.20mA @ 250VAC 50Hz: 0.40mA

EMI Line Filter: Maximum leakage current each line to ground:
@ 115VAC 60Hz: 0.25mA; 1.0mA (10000pF) @ 250VAC 50Hz: 0.45mA; 2.0mA (10000pF)

★Web Code: ACR

Fig. 20

Fig. 21



Fig. 22



Fig. 23

Part No.	Mfr.	Product No.	Description	Fig.	Current (A)	Hipot (VDC)	Terminals	Terminal Size	Agency Approvals	Dimension (in.) A	B	C	D	Pricing 1	10	100
1951511	Delta	01GEEG3E (1ED1)†	Power entry filter, straight (screw flanged)	1	1	2250	Faston	0.25"	UL/CSA/VDE	2.20	1.19	0.87	1.58	$2.49	$2.25	$1.95
1951529	Delta	01DEEG3V	Power entry filter, rt. angle (screw flanged)	3	1	2250	Faston	0.25"	UL/CSA/VDE	1.64	1.19	0.87	1.58	.79	.69	.59
1172613	Tyco	1EGG1-2	Pwr entry filter, straight, fused (screw flanged)	4	1	2250	Faston	0.25"	UL/CSA/VDE	1.62	1.29	1.44	1.27	.69	.59	.49
2189599	Adam Tech	PLF-1DZ2KR	Pwr entry filter, w/ fuse & switch (screw flanged)	2	1	250	Faston	0.25"	UL/CSA/DVE	1.97	2.56	1.58	1.58	9.95	8.95	7.95
2178523	Schurter	5110.0343.1	Power entry filter, straight (snap-in)	5	3	2250	Faston	0.25"	UL/CUL	1.42	0.91	1.19	0.80	1.95	1.75	1.49
2114116	Adam Tech	PLF-3PC	Line filter, metal case (PC mount)	6	3	250	Solder	0.039"	UL/CSA/VDE	0.984	0.984	0.787	—	5.95	5.39	4.79
2189581	Adam Tech	PLF-3DZ2KR	Power entry filter, w/ fuse & switch (screw flanged)	2	3	250	Faston	0.25"	UL/CSA/DVE	1.97	2.56	1.58	1.58	7.95	6.95	5.95
1954720	Delta	04BEEG3S	Power entry filter, straight, fused (screw flanged)	1	4	2250	Faston	0.25"	UL/CSA/VDE	2.26	1.19	1.26	1.40	1.19	.99	.69
1811391	Delta	06A2D	Power entry module (snap-in)	7	4	2250	Faston	0.25"	UL/CSA/VDE	2.65	2.50	1.06	1.11	6.95	6.25	5.59
1951570	Delta	05DRDG3S (5ER7)†	Power entry filter, 6-32 threaded panel mount	9	5	2250	Faston	0.25"	UL/CSA/VDE	3.15	1.97	1.28	1.58	2.95	2.59	2.29
2114124	Adam Tech	PLF-6DZ2KR	Pwr entry filter, strght, fuse & sw. (scrw flngd)	10	6	250	Faston	0.25"	UL/CSA/VDE	1.968	2.559	2.394	1.154	9.95	8.95	7.95
1951588	Delta	06DEEG3V	Power entry filter, right angle (screw flanged)	3	6	2250	Faston	0.25"	UL/CSA/VDE	1.64	1.19	0.87	1.58	1.79	1.45	1.25
2197871	Delta	06BENG3G	Power entry filter, male (snap-in)	8	6	2250	Faston	0.32"	UL/CSA/VDE	0.30	1.90	1.10	1.70	5.95	4.95	3.95
1172672	Corcom	IVB3	Line filter (flange mount)	19	10	2250	1.5" Wire	Wire	UL/CSA/VDE	0.96	1.82	0.66	2.53	5.95	4.95	3.95
2178507	Arndt Electronics	6100-4115	AC power inlet, male (snap-in)	15	10	250	Solder	0.14"	UL/CSA/VDE	1.19	0.91	1.06	0.77	.29	.25	.19
117445	ValuePro	0717#	AC power inlet, male w/ fuse chamber (snap-in)	17	10	250	Faston	0.187"	UL/CSA/VDE	1.18	1.30	1.05	1.20	1.95	1.79	1.59
265528	Arndt Electronics	WS-044#	AC power inlet, male w/ fuse chamber (screw)	18	10	250	Faston	0.187"	UL/CSA/VDE	1.40	1.28	1.06	1.21	1.75	1.49	1.25
2197880	Delta	10DRCS5	Power entry filter (flange mount)	20	10	2250	Threadpost	0.164"	UL/CSA/VDE	3.87	1.52	2.94	1.21	7.95	6.95	5.95
2189521	Adam Tech	IEC-GS-1-150	Pwr entry filter, w/ fuse & switch (snap-in)	21	15	250	Faston	0.187"	UL/CSA/DVE	1.20	1.97	1.06	1.83	2.95	2.75	2.49
2189564	Adam Tech	NEMA-5-1-A	AC pwr inlet, NEMA fem, angled GND pin (snap-in)	11	15	125	Faston	0.25"	UL/CSA/DVE	1.06	1.06	0.70	0.85	.89	.79	.65
2189572	Adam Tech	NEMA-5-1-B	AC pwr inlet, NEMA fem, straight GND pin (snap-in)	11	15	125	Faston	0.25"	UL/CSA/DVE	1.06	1.06	0.70	0.85	.99	.85	.69
2114095	Adam Tech	NEMA-5-2*	AC power outlet, NEMA receptacles (snap-in)	11	15	125	Fork	0.25"	UL/CSA/VDE	1.063	1.063	0.70	0.866	.99	.85	.69
147901	ValuePro	701R	AC power inlet, male (screw flanged)	12	15	250	Faston	0.187"	UL/CSA/VDE	1.97	0.76	1.06	1.58	1.09	.99	.79
16652	ValuePro	JR101	AC power inlet, male (screw flanged)	12	15	250	Faston	0.25"	UL/CSA/VDE	1.97	0.76	1.06	1.58	1.09	.99	.79
2133712	Schurter	VSP1.8101.1	AC pwr inlet, M R/A (screw flanged, PC mount)	13	15	250	Solder	0.05"	UL/CSA/VDE	1.96	1.09	1.09	0.78	.29	.25	.19
2114010	Adam Tech	IEC-A-4	AC pwr inlet, M R/A (screw flanged, PC mount)	13	15	250	Solder	0.071"	UL/CSA/VDE	1.97	0.89	1.06	0.76	.39	.29	.19
2178494	Arndt Electronics	EAC-324	AC power inlet, male, straight (screw flanged)	14	15	250	Solder	0.16"	UL/CSA/VDE	1.96	0.89	1.09	1.09	.39	.35	.29
2178515	Arndt Electronics	EAC-409	AC power inlet, male (snap-in)	15	15	250	Solder	0.16"	UL/CSA/VDE	1.22	0.94	1.06	0.78	.59	.49	.39
147109	ValuePro	42R02	AC power inlet, male (snap-in)	16	15	250	Faston	0.25"	UL/CSA/VDE	1.23	0.95	1.04	0.77	.99	.89	.75
2095525	Adam Tech	IEC-GS-1-100#	AC pwr inlet, male w/ sw. & fuse folder (snap-in)	15	15	250	Faston	0.187"	UL/CSA/VDE	1.20	1.97	0.77	1.83	2.95	2.75	2.49
1954640	ValuePro	K2415	AC power inlet, female (snap-in)	22	15	250	Faston	0.187"	UL/CSA/VDE	1.38	0.98	1.26	1.10	.39	.35	.25
1954658	ValuePro	K2414	AC power inlet, female (screw flanged)	23	15	250	Faston	0.187"	UL/CSA/VDE	1.97	1.14	1.26	0.95	1.75	1.49	1.25
2157546	Adam Tech	IEC-GS-1-200	AC pwr fused inlet, male w/ switch (snap-in)	2	15	250	Faston	0.187"	UL/CSA/VDE	1.07	1.97	1.06	1.83	2.95	2.59	2.39

† High Performance; Increased filtering; Added bleeded resistor; More safety agencies * For 14-16 AWG wire # Includes spare fuse holder – fuse type 5mm x 20mm (250V)

International Power Cords

- 3-conductor detachable power cords
- Voltage rating: 300V
- Cord color: black
- BSI: British Standard Institution
- Cord type: H05VVF
- P/N 2202298/2202301 with RFI filter

Part No.	Cross Ref. No.	Country	Agency Approvals	Plug Fig.	Cord Length	Conductors	Pricing 1	10	100
117911	2171H576	Europe	All	1/A	6 ft.	3/0.75mm	$4.95	$4.49	$3.95
2202298	ER71RFI	Europe	All	1/A	10 ft.	3/1.0mm	6.95	6.25	5.59
174633	21071H5182	UK/Ireland	BSI	2/A	8 ft.	3/1.0mm	6.95	6.25	5.59
2202301	2171RFI10	UK/Ireland	BSI	2/A	10 ft.	3/1.0mm	8.95	7.95	6.95

Fig. 1 (Straight)

Fig. 2
(Right Angle, Fused)

Fig. A

★Web Code: XAQ

European Agency Approvals

Germany	VDE		France	LCIE	
Austria	OVE		Netherlands	KEMA	
Belgium	CEBEC		Norway	NEMKO	
Denmark	DEMKO		Sweden	SEMKO	
Finland	FIMKO		Switzerland	SEV	

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box


Line Cord w/ Pigtail (Fig. 1) w/ Strain Relief (Fig. 1A)


Laptop Power Cord (Fig. 2)



AC Plug Fan Power Cord (Fig. 3)


Power Cord w/ Pigtail (Fig. 4)


Detachable Power Cord (Fig. 5)

Computer Power Supply Extension Cord (Fig. 6)



Straight or Right Angle with Pigtail (Fig. 7)



Right Angle Detachable Power Cord (Fig. 8)


Hospital Grade Power Cord (Fig. 9)


Computer Monitor Power Adapter Cord (Fig. 10)


Detachable Power Strip Saver (Fig. 11)


Example (Fig. 11)



Power Strip Saver II (Fig. 12)

Example (Fig. 12)



4' Overall Length "Y" Twin End (Fig. 13)

Mickey Mouse™ Style Power Cord (Fig. 14)

Plug Detail – Industry Standard Designations


290B

910

386A/386E


150

JAMECO ValuePro

2 & 3-Conductor Fan, Pigtail, Detachable & Hospital Grade Power Cords

- Molded connectors
- Excellent resistance to jacket abrasion
- Voltage rating: 300 volts
- Temperature: -20°C to +60°C

*Web Code: UBF

AWG	Volts	Amps	VA
18	125	10	1250
16	125	12	1500
14	125	15	1875

2-Conductor Line Cords with Pigtail

Part No.	Product No.	*Mfr.	Wt.	Fig.	Length	Color	AWG/ Cond	Cord Type*	Pricing 1	10	50	100
124434	ST008	JVP	.16	1	6'	Black	18/2	SPT-2	$2.49	$2.25	$1.95	$1.75
42042	SY-001-R	JVP	.18	1A	6'	Black	18/2	SPT-2	2.95	2.75	2.49	2.25

2-Conductor "8" Style Power Cords for Laptops and Power Supplies

2151195	123855-1	JVP	.15	2	3'	Black	18/2	SPT-2	$.95	$.85	$.75	$.65
189587	VW-1	JVP	.30	2	6'	Black	18/2	SPT-2	2.95	2.69	2.39	2.19

2-Conductor AC Plug Fan Power Cords

1952572	FACS	JVP	.40	3A	6'	Black	18/2	SPT-2	$3.95	$3.59	$3.19	$2.49
1952581	FAC45	JVP	.40	3B	6'	Black	18/2	SPT-2	4.95	4.59	3.95	3.49

3-Conductor Power Cords with Pigtail (Unshielded) 290 Plug

38009	17237	JVP	.31	4	6'	Gray	18/3	SVT	$3.79	$3.39	$2.95	$2.79
2158258	17236SR#	JVP	.35	4	6'	Black	18/3	SVT	3.95	3.59	3.25	2.75
37997	17236	JVP	.30	4	6'	Black	18/3	SVT	4.95	4.49	3.95	3.59
173810	17405	JVP	.14	4	6'	Gray	18/3	SJT	4.95	4.49	3.95	3.59
159410	17405B	JVP	.37	4	6'	Black	18/3	SJT	4.95	4.49	3.95	3.59
38025	17238	JVP	.42	4	8'	Black	18/3	SVT	5.95	5.49	4.95	4.49
102007	17535B†	JVP	.49	4	10'	Black	18/3	SVT	6.95	6.25	5.95	5.59
196286	LL40378	JVP	.80	4	10'	Black	16/3	SJT	7.95	6.95	5.95	4.95
2217908	00960018	JVP	.41	4	6'	Black	14/3	SJT	9.95	8.95	7.95	6.95
100272	17629B	JVP	.88	4	9'	Black	14/3	SJT	9.95	8.95	7.95	6.95

3-Conductor Detachable Power Cords (Unshielded) 290B/386A Plugs

2081801	17002A	JVP	.36	5	1'	Black	18/3	SVT	$2.95	$2.65	$2.39	$1.95
2172834	LL11094B	JVP	.16	5	1.5'	Black	18/3	SVT	2.49	1.95	1.75	1.59
2082425	17000A	JVP	.35	5	3'	Black	18/3	SVT	3.25	2.95	2.59	2.29
38041	17249	JVP	.37	5	6'	Beige	18/3	SVT	3.49	2.95	2.49	1.95
2202280	17250RFI§	JVP	.36	5	6'	Black	18/3	SVT	3.95	3.59	3.29	2.95
38050	17250	JVP	.36	5	6'	Black	18/3	SVT	4.95	4.49	3.95	3.59
132118	17500	JVP	.44	5	6'	Black	18/3	SJT	4.95	4.49	3.95	3.25
1585637	171096	JVP	.60	5	8'	Black	18/3	SVT	4.95	4.49	3.95	3.59
2202271	17501RFI§	JVP	.55	5	10'	Black	18/3	SVT	4.95	4.49	3.95	3.59
102024	17501V	JVP	.55	5	10'	Black	18/3	SVT	6.95	6.25	5.95	5.49
163361	6952299	JVP	.75	5	14'	Black	18/3	SJT	7.95	6.95	6.25	5.59
2145051	177323	JVP	.70	5	15'	Black	18/3	SVT	4.95	3.95	3.49	2.95
2188650	LL81924	JVP	.72	5	8'	Gray	18/3	SJT	3.95	3.59	3.29	2.95
2126053	LL76932§	JVP	.52	5	6'	Black	16/3	SJT	3.95	2.95	2.49	1.95
159361	17602	JVP	.52	5	6'	Black	16/3	SJT	6.95	5.95	5.35	4.79
1537230	LL34877	JVP	.72	5	8'	Black	16/3	SJT	7.95	6.95	6.25	5.59
125541	17504	JVP	.72	5	6'7"	Black	14/3	SJT	7.95	7.19	6.49	5.79
2172981	1181924	JVP	.95	5	10'	Black	14/3	SJT	8.95	7.95	6.95	5.95

#.55" x .62" strain relief †European standard insulation color code §RFI filter on cord

3-Conductor Detachable Power Cords (Shielded) 290B/386A Plugs

213874	17660BG	JVP	.40	5	6'	Beige	18/3	SVT	$3.95	$3.49	$2.95	$2.49
161761	17742	JVP	.40	5	6'	Black	18/3	SVT	4.49	3.95	3.59	2.95

3-Conductor Computer Power Supply Extension Cords (150/386A/910 Plugs)

206172	PEC-3	JVP	.22	6	3'	Black	18/3	SVT	$2.49	$1.95	$1.75	$1.49
319804	LR94903	JVP	.82	6	6'	Gray	18/3	SVT	1.75	1.59	1.35	1.09
28468	PEC	JVP	.36	6	6'	Black	18/3	SVT	3.95	3.55	3.19	2.79
2133595	PEC-SJT	JVP	.36	6	6'	Black	18/3	SJT	3.95	3.59	3.29	2.95
420224	10W1-02212	JVP	.53	6	12'	Black	18/3	SVT	5.95	5.39	4.79	4.25

3-Conductor Power Cord with Pigtail (Shielded) 910 Plug

339995	72WV866SSDI	JVP	.49	7	6'7"	Black	18/3	SVT	$1.49	$1.25	$1.09	$.95

3-Conductor Right Angle Detachable Power Cords (Unshielded) 290B/910 Plugs

117357	8120-6177	JVP	.41	8B	6'	Gray	18/3	SVT	$3.95	$3.55	$3.19	$2.79
38077	17250R	JVP	.54	8B	6'	Black	18/3	SVT	3.95	3.55	3.19	2.79
2099999	E88265	ARD	.82	8A	8'	Black	18/3	SVT	1.95	1.75	1.49	1.09
177384	17507	JVP	.28	8B	10'	Black	18/3	SVT	4.95	4.49	3.95	3.49

3-Conductor Right Angle Detachable Power Cord (Shielded) 290B/910 Plugs

173252	17745	JVP	.16	8B	6'7"	Black	18/3	SVT	$5.95	$5.39	$4.79	$4.25

3-Conductor Hospital Grade Power Cords (green dot)

2115434	LL39965	JVP	.75	9	10'	Gray	18/3	SJT	$4.95	$4.49	$3.95	$3.59
132011	17006G	JVP	.82	9	10'	Gray	16/3	SJT	10.95	9.95	8.95	7.95

3-Conductor Computer Monitor Power Adapter Cord (150/386 Plugs)

177448	MPC1	JVP	.16	10	1'	Black	18/3	SVT	$2.95	$2.69	$2.39	$2.19

3-Conductor Detachable Power Cords (Power Strip Saver) 290B/386 Plugs

208339	P55-BR	JVP	.16	11	1'	Beige	18/3	SVT	$1.95	$1.75	$1.49	$1.25
199778	PSS-1	JVP	.16	11	1'	Black	18/3	SVT	2.95	2.69	2.39	2.15

3-Conductor Power Cord ("Y" Type Power Strip Saver II) 290B/386 (2) Plugs

208347	121-2594	ZTK	.38	12	22"	Black	16/3	SJT	$8.95	$7.95	$7.49	$6.95

3-Conductor Power Cord ("Y" Twin End) 150/386 (2) Plugs

340566	17268A	JVP	.32	13	4'	Black	18/3	SJT	$6.95	$6.25	$5.59	$4.95

3-Conductor "Mickey Mouse" Style Power Supply Cords (2 Prong Plug w/ Ground)

2201560	CMC105	JVP	.40	14	6'	Black	18/3	VCTP	$1.95	$1.75	$1.49	$1.25
1953559	MMFLAT	MWL	.40	14	6'	Black	18/3	SPT-2	2.59	2.25	1.95	1.59
1951123	MMPC	MWL	.40	14	6'	Black	18/3	SVT	2.95	2.59	2.29	1.95

*Thermoplastic Cord Jacket Type: **SPT-2 (Flat):** Junior duty; **SVT (Round):** Light service; **SJT (Round):** Junior service

*ARD = Arndt Electronics | JVP = Jameco ValuePro | MWL = Mean Well | ZTK = Ziotek

Open-Frame Switching AC-to-DC Power Supplies

- Universal AC input/full range • Two-year warranty
- Short-circuit, overload and overvoltage protection

★Web Code: OSP

† **PFC Model:** • Built-in active Power Factor Correction function, power factor >0.93 • Three-year warranty

Complete specifications available online

NFM-15

EPS-25

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Input (VAC @ Hz)	Size (L"xW"xH")	Mounting Holes (L"xW"xDia.")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	EFF (%)§	Certification	Pricing: 1	Pricing: 10
Single Output														
694971	Mean Well	NFM-05-5	+5V @ 0-1A	5W	85-264 @ 47-440	2.3x1.8x0.8	4-pin PCB	80	1.5	1.0	71	UL/CUL/TUV/CE	$9.49	$8.49
2188692	TDK-Lambda	ZWS5-5	+5V @ 0-1A	5W	85-265 @ 47-440	3.8x1.8x0.8	3.6x1.5x0.1	120	2.0	1.0	67	UL/CSA/TUV/CE	8.95	7.95
695092	Mean Well	NFM-10-5	+5V @ 0-2A	10W	85-264 @ 47-440	2.6x1.8x0.9	4-pin PCB	80	1.0	1.0	74	EN/IEC/TU/UL	10.95	9.95
229042	Phihong	PSA15LN3-050	+5V @ 0-3A	15W	90-264 @ 47-63	4.3x1.6x0.9	4.0x1.3x0.2	50	2.0	1.0	65	UL/CUL/TUV/CE	19.95	18.95
2174071	Mean Well	EPS-15-5	+5V @ 0-3.3A	15W	85-264 @ 47-63	2.5x1.8x0.9	2.3x1.5x0.1	50	1.0	0.5	78	UL/CUL/TUV/CB/CCE	7.95	7.25
2210722	Phihong	PSA25-105	+5V @ 0-4A	20W	100-240 @ 47-63	4.0x3.0x1.3	3.6x2.6x0.2	50	2.0	1.0	70	UL/CSA/VDE	10.95	9.95
2164316	Mean Well	EPS-25-5	+5V @ 0-5A	25W	85-264 @ 47-63	3.0x2.0x0.9	2.0x1.8x0.1	60	1.0	0.5	81	UL/TUV/EN	11.95	10.49
212354	Mean Well	PS-25-5	+5V @ 0-5A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	80	2.0	0.5	74	UL/CUL/TUV/CE	10.95	9.95
217332	Mean Well	PS-45-5	+5V @ 0-8A	40W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	3.0	1.0	74	UL/CUL/TUV/CE	12.95	11.49
2164498	Mean Well	EPS-45-5	+5V @ 0-8A	45W	90-264 @ 47-63	4.0x2.0x1.1	2.0x1.8x0.1	80	2.0	0.5	82	UL/TUV/EN	13.49	12.49
2106327	Mean Well†	RPS-160-5	+5V @ 0-20A	103W	90-264 @ 47-63	5.0x3.0x1.4	3.0x2.6x0.1	100	1.0	0.5	85	EN/TU/UL	49.95	44.95
392826	Mean Well	PS-25-7.5	+7.5V @ 0-3.3A	24.8W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	80	2.0	0.5	76	UL/TUV/EN	11.95	10.49
2164324	Mean Well	EPS-25-7.5	+7.5V @ 0-3.4A	25W	85-264 @ 47-63	3.0x2.0x0.9	2.0x1.8x0.1	80	1.0	0.5	83	UL/TUV/EN	11.95	10.95
2210749	Phihong	PSA15LN3-090	+9V @ 0-1.6A	15W	100-240 @ 50-60	4.3x1.5x1.0	4.0x1.2x0.2	90	2.0	1.0	65	CUL/CE/TUV	11.95	10.95
2188772	UMEC	UP0401S-09	+9V @ 0-4.4A	40W	90-264 @ 47-63	4.0x3.0x1.0	3.6x2.6x0.2	100	1.0	1.0	70	UL/CSA/TUV	12.95	11.49
695156	Mean Well	NFM-15-12	+12V @ 0-1.25A	15W	85-264 @ 47-440	2.8x1.9x0.9	4-pin PCB	150	0.5	0.5	78	EN/ICE/TU/UL	12.95	11.49
2105666	Mean Well	PS-15-12	+12V @ 0-1.25A	15W	85-264 @ 47-63	3.7x1.9x1.0	3.4x1.9x0.1	150	0.5	0.5	77	CB/CE	7.95	6.95
148604	Mean Well	PS-25-12	+12V @ 0-2.1A	25.2W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	100	2.0	0.3	78	UL/CUL/TUV/CE	10.95	9.95
2164332	Mean Well	EPS-25-12	+12V @ 0-2.1A	25.2W	85-264 @ 47-63	3.0x2.0x0.9	2.0x1.8x0.1	100	0.5	0.5	86	UL/TUV/EN	11.95	10.95
220987	Mean Well	MPS-30-12	+12V @ 0-2.5A	30W	88-264 @ 47-63	4.0x2.6x0.9	2.7x2.4x0.1	120	1.0	1.0	75	UL/TUV/IEC	19.95	17.95
2164421	Mean Well	EPS-35-12	+12V @ 0-3.3A	36W	85-264 @ 47-63	3.0x2.0x0.9	2.8x1.8x0.1	100	0.5	0.5	87	UL/TUV/EN	11.49	10.49
213728	Mean Well	PS-45-12	+12V @ 0-3.7A	44.4W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	2.0	1.0	76	UL/CUL/TUV/CE	12.95	11.49
2164594	Mean Well	EPS-45-12-C	+12V @ 0-4.2A	45W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	120	1.0	0.5	87	UL/TUV/EN	17.95	16.49
2164519	Mean Well	EPS-45-12	+12V @ 0-4.2A	45W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	120	1.0	0.5	87	UL/TUV/EN	14.95	13.95
252401	Mean Well	LPS-50-12	+12V @ 0-4.2A	50.4W	90-264 @ 47-63	7.6x2.1x0.9	7.3x1.7x0.1	80	2.0	1.0	82	UL/CUL/TUV/CE	13.95	12.49
2205413	Astrodyne**	ASM60-1380	+12V @ 0-5A	60W	100-240 @ 50-60	4.0x2.0x1.7	3.7x1.7x0.1	100	3.0	1.0	84	UL/CUL/TUV/CE	9.95	8.95
148639	Mean Well	PS-65-12	+12V @ 0-5.2A	62.4W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	79	UL/CUL/TUV/CE	13.95	12.49
2099981	ITE	SBU60-105	+12V @ 0-5.25A	63W	90-264 @ 47-63	5.0x3.0x1.1	4.6x2.6x0.2	120	3.0	0.5	80	UL/CUL/CE	7.95	6.95
2106335	Mean Well†	RPS-60-12	+12V @ 0-5.5A	66W	90-264 @ 47-63	4.0x2.0x1.1	2.0x1.8x0.1	120	1.0	0.5	83	EN/IEC/TU/UL	16.95	15.49
2164674	Mean Well	EPS-65-12	+12V @ 0-6A	65.04W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	120	1.0	0.5	86	UL/TUV/EN	13.95	12.49
2164754	Mean Well	EPS-65-12-C	+12V @ 0-6A	72W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	120	1.0	0.5	86	UL/TUV/EN	18.95	16.95
2172391	Mean Well†	EPP-100-12	+12V @ 0-6.3A	75.6W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	130	1.0	0.5	91	UL/TUV/EN	42.95	38.95
173472	Mean Well	LPS-100-12	+12V @ 0-8.4A	100.8W	88-132 @ 47-63	8.7x2.4x1.3	2.4x2.0x0.1	100	1.5	0.5	79	UL/CUL/TUV/CE	28.95	26.95
374089	Mean Well†	PPS-125-12	+12V @ 0-8.5A	102W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.1	100	1.0	0.5	80	UL/CUL/TUV/CE	44.95	40.95
213681	Mean Well†	LPP-150-12	+12V @ 0-12.5A	100.8W	85-264 @ 47-63	8.7x2.4x1.6	8.3x2.6x0.2	100	1.0	0.5	79	UL/CUL/TUV/CE	36.95	33.95
2172447	Mean Well†	EPP-150-12	+12V @ 0-12.5A	100.8W	90-264 @ 47-63	4.0x2.0x1.0	2.0x1.8x0.1	130	1.0	0.5	91.5	UL/TUV/EN	43.95	39.95
2149431	Mean Well†	USP-150-12	+12V @ 0-12.5A	150W	90-295 @ 47-63	8.5x2.7x1.3	8.3x2.1x0.1	150	1.0	0.5	91.5	IEC/EN/UL	53.95	47.95
668713	Mean Well†	PPS-200-12	+12V @ 0-16.6A	199.2W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.1	100	1.0	0.5	89	UL/CUL/TUV/CE	58.95	54.95
2172324	Mean Well†	MSP-200-12	+12V @ 0-16.7A	200.4W	85-264 @ 47-63	7.8x3.9x1.5	3.8x3.3x0.1	120	0.5	0.3	88	ANSI/AAMI/IEC	94.95	84.95
2164252	Mean Well†	EPP-300-12	+12V @ 0-25A	300W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.1	120	1.0	0.5	90	UL/TUV/EN	63.95	57.95
374380	Mean Well	PS-65-13.5	+13.5V @ 0-5.4A	63.5W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	100	2.0	1.0	79	UL/CUL/TUV/CE/CB	13.95	12.49
695164	Mean Well	NFM-15-15	+15V @ 0-1A	15W	85-264 @ 47-440	2.8x1.9x0.9	4-pin PCB	150	0.5	0.5	79	EN/IEC/TU/UL	11.95	10.95
2210731	Phihong	PSA25-115	+15V @ 0-1.6A	24W	100-240 @ 47-63	4.0x3.0x1.3	3.6x2.6x0.2	150	2.0	1.0	70	UL/CSA/VDE	10.95	9.95
216769	Mean Well	PS-25-15	+15V @ 0-1.7A	25.5W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	100	2.0	0.3	78	UL/CUL/TUV/CE	11.95	10.95
2164341	Mean Well	EPS-25-15	+15V @ 0-1.7A	25.5W	85-264 @ 47-63	3.0x2.0x0.9	2.0x1.8x0.1	100	0.5	0.5	87	UL/TUV/EN	11.95	10.95
1919019	Mean Well	PS-35-15	+15V @ 0-2.4A	36W	90-264 @ 47-440	4.0x2.0x0.9	3.8x1.8x0.1	150	0.5	0.5	81	UL/CUL/TUV/CE/CB	12.95	11.49
216751	Mean Well	PS-65-15	+15V @ 0-4.2A	63W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	79	UL/CUL/TUV/CE	13.95	12.49
216670	Mean Well†	LPP-100-15	+15V @ 0-6.7A	100W	85-264 @ 47-63	8.7x2.4x1.3	8.3x2.0x0.1	100	0.5	0.5	80	UL/CUL/TUV/CE	24.95	22.49
2122491	Mean Well†	PLP-20-24	+24V @ 0-0.8A	19.2W	90-277 @ 47-63	5.5x1.3x0.8	5.2x1.0x0.1	300	10.0	3.0	82	UL/CUL/TUV/CE	10.95	9.95
212346	Mean Well	PS-25-24	+24V @ 0-1A	24W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	240	2.0	0.2	79	UL/CUL/TUV/CE	11.95	10.49
2164771	Mean Well	EPS-65-24-C	+24V @ 0-3A	72W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	240	1.0	0.5	88	UL/TUV/EN	18.95	16.95
2164471	Mean Well	EPS-35-48	+48V @ 0-0.75A	36W	85-264 @ 47-63	3.0x2.0x.9.0	2.8x1.8x0.1	240	0.5	0.5	90	UL/TUV/EN	13.49	11.95

* Primary output ** Medical rated § Efficiency

★*For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box*

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Open-Frame Switching AC-to-DC Power Supplies (Cont.)

- Universal AC input/full range • Two-year warranty
- Short-circuit, overload and overvoltage protection

† **PFC Model:** • Built-in active Power Factor Correction function, power factor >0.93 • Three-year warranty

Complete specifications available online

★Web Code: OSP

PPS-125

LPP-150

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Input (VAC @ Hz)	Size (L"xW"xH")	Mounting Holes (L"xW"xDia.")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	EFF (%)§	Certification	Pricing: 1	Pricing: 10
Single Output (Continued)														
1919035	Mean Well	PS-35-24	+24V @ 0-1.5A	36W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	240	2.0	0.2	85	UL/CUL/TUV/CE	$12.95	$11.49
213720	Mean Well	PS-45-24	+24V @ 0-1.9A	45.6W	90-264 @ 47-440	4.0x2.0x0.9	3.8x1.8x0.1	200	0.5	0.5	78	UL/CUL/TUV/CE/CB	12.95	11.49
2164615	Mean Well	EPS-45-24-C	+24V @ 0-2.1A	45.6W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	150	1	0.5	89	UL/TUV/EN	17.95	16.49
148647	Mean Well	PS-65-24	+24V @ 0-2.7A	64.8W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	80	UL/CUL/TUV/CE	13.95	12.49
2164691	Mean Well	EPS-65-24	+24V @ 0-3A	65.04W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	240	1.0	0.5	88	UL/TUV/EN	13.95	12.49
173463	Mean Well†	LPS-100-24	+24V @ 0-4.2A	100.8W	88-264 @ 47-63	8.7x2.4x1.3	8.4x2.1x0.1	150	0.5	0.5	80	UL/CUL/TUV/CE	28.95	26.95
2129684	Elpac**	MSM7524	+24V @ 0-4.6A	110W	100-240 @ 50-60	5.7x3.4x1.6	5.2x3.4x1.5	240	3.0	1.0	80	UL/CUL/CE	12.95	11.95
2172412	Mean Well†	EPP-100-24	+24V @ 0-4.2A	100.8W	90-264 @ 47-63	4.0x2.0x1.1	2.0x1.8x0.1	240	1.0	0.5	92	UL/TUV/EN	39.95	35.95
301429	Mean Well†	PPS-125-24	+24V @ 0-5.2A	124.8W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.1	150	1.0	0.5	83	UL/CUL/TUV/CE	44.95	40.95
2172463	Mean Well†	EPP-150-24	+24V @ 0-6.25A	150W	90-264 @ 47-63	4.0x2.0x1.1	2.0x1.8x0.1	240	1.0	0.5	93	UL/TUV/EN	43.95	39.95
213672	Mean Well†	LPP-150-24	+24V @ 0-6.25A	150W	85-264 @ 47-63	8.7x2.4x1.6	8.3x2.6x0.2	150	0.5	0.5	83	UL/CUL/TUV/CE	36.95	33.95
2149458	Mean Well†	USP-150-24	+24V @ 0-6.3A	150W	90-295 @ 47-63	8.5x2.7x1.3	8.3x2.1x0.1	150	1	0.5	93	IEC/EN/UL	53.95	47.95
1773419	Astec†	LPS175	+24V @ 0-7.5AA	175W	85-264 @ 47-63	8.5x4.2x1.5	7.4x2.5x0.1	150	2.0	1.0	75	UL/CSA/CE	54.95	49.95
668730	Mean Well†	PPS-200-24	+24V @ 0-8.3A	199.2W	90-264 @ 47-63	5.0x3.0x1.4	3.7x7.8x0.1	150	1.0	0.5	89	UL/CUL/TUV/CE	54.95	49.95
2164279	Mean Well†	EPP-300-24	+24V @ 0-12.5A	200W	90-264 @47-63	5.0x3.0x1.4	3.0x2.6x0.1	150	1.0	0.5	92.5	UL/TUV/EN	64.95	59.95
236882	Mean Well	LPP-100-27	+27V @ 0-3.8A	102.6W	85-264 @ 47-63	8.7x2.4x1.3	8.4x2.4x1.3	150	0.5	0.5	83	UL/CUL/TUV/CE	14.95	13.95
2164551	Mean Well	EPS-45-48	+48V @ 0-1.1A	48W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	300	1	0.5	90	UL/TUV/EN	13.95	12.49
2164631	Mean Well	EPS-45-48-C	+48V @ 0-1.1A	52.8W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	300	1	0.5	90	UL/TUV/EN	17.95	16.49
2164711	Mean Well	EPS-65-48	+48V @ 0-1.36A	65W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	300	1	0.5	90	UL/TUV/EN	14.95	13.49
201954	Mean Well	PS-65-48	+48V @ 0-1.5A	64.8W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	100	2.0	1.0	80	UL/CUL/TUV/CE/CB	15.95	14.49
2172439	Mean Well†	EPP-100-48	+48V @ 0-1.6A	76.8W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	300	1	0.5	92.5	UL/TUV/EN	42.95	38.95
2172480	Mean Well†	EPP-150-48	+48V @ 0-2.1A	100.8W	90-264 @ 47-63	4.0x2.0x1.1	3.8x1.8x0.1	300	1	0.5	92	UL/TUV/EN	46.95	42.95
2149474	Mean Well†	USP-150-48	+48V @ 0-3.2A	150W	90-295 @ 47-63	8.5x2.7x1.3	8.3x2.1x0.1	250	1	0.5	93	IEC/EN/UL	53.95	47.95
2164295	Mean Well†	EPP-300-48	+48V @ 0-6.25A	300W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.1	250	1	0.5	93	UL/TUV/EN	63.95	57.95
Double Output														
2188617	Powdec	CML0522	+5V @ 0-1.5A; +12V @ 0-0.6A	15W	100-240 @ 50-60	3.5x2.3x1.1	3.1x2.0x0.1	50	4.0	2.0	65	UL/CSA/TUV/CE	$9.95	$8.95
212338	Mean Well	PD-25A	+5V @ 0.2-2.5A; +12V @ 0.1-1.5A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50;150	1.0	0.5	71	UL/CUL/TUV/CE	13.95	12.49
212330	Mean Well	PD-25B	+5V @ 0.2-2A; +24V @ 0.1-1A	25.2W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50;200	1.0	0.5	77	UL/CUL/TUV/CE	13.95	12.49
2215697	Artesyn	NLP40-7629J	+5V @ 4A; +12V @ 0-2A	40W	90-264 @ 47-63	4.2x2.5x1.1	4.0x2.2x0.1	50;120	3.0	1.0	75	UL/CSA/CE	12.95	11.95
194862	Mean Well	PD-45A	+5V @ 0.4-3.2A; +12V @ 0.2-2	40W	90-264 @ 47-440	5.0x2.5x1.5	4.5x2.5x0.2	50;120	3.0	1.0	77	UL/CSA	14.95	13.49
2197741	Skynet	SNP-N563	+5V @ 1.0-8A; +3.3V @ 0.5-6A	60W	85-264 @ 47-63	5.0x3.0x1.1	4.6x2.6x0.2	50	3.0	1.0	70	UL	10.95	9.95
194889	Mean Well	PD-65A	+5V @ 0.4-7A; +12V @ 0.2-3.2A	61.1W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	50;120	3.0	1.0	78	UL/CUL/TUV/CE	14.49	13.49
194897	Mean Well	PD-65B	+5V @ 0.4-3.5A; +24V @ 0.2-2A	65.5W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	50;150	3.0	1.0	81	UL/CUL/TUV/CE	14.95	13.49
148690	Mean Well	PD-2512	+12V @ 0.1-1.2A; -12V @ 0.1-1A	24W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	3.0	0.5	74	UL/CUL/TUV/CE	13.95	12.49
2100857	Mean Well	PD-25-15	+15V @ 0-1A, -5V @ 0-1A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	3.0	0.5	75	UL/CUL/TUV/CE	13.95	12.49
Triple Output														
2129676	Elpac**	MSM40D	+5.1V @ 0-4A; +24V @ 0-1A; -12V @ 0.4A	40W	100-240 @ 50-60	5.0x3.0x1.1	4.6x2.5x0.2	50	5.0	5.0	70	UL/CUL/CSA/CE	$8.95	$7.95
2210757	Phihong	PSS-40-304	+5V @ 0-4.5A; +15V @ 0-2A; -15V @ 0.5A	40W	100-240 @ 50-60	4.2x2.5x1.2	4.0x2.2x0.1	50; 150;150	3.0	3.0	70	CUL/CE/NEMKO	16.95	15.49
229122	Phihong	PSA4531	+5V @ 0-4A; +12V @ 0-1.5A; -12V @ 0-0.5A	44W	90-264 @ 47-63	5.0x3.0x1.2	4.6x2.6x0.2	50; 120;120	2.0	1.0	70	UL/CSA/TUV/CE	35.95	33.95
88402	Mean Well	PT-45B	+5V @ 0.4-3A; +12V @ 0.2-2A; -12V @ 0-0.3A	45W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	50; 120;100	3.0	1.0	75	UL/CUL/TUV/CE	16.95	14.95
2106108	Mean Well	PT-65A	+5V @ 0-5.5A; 12V @ 2.5A; -5V @ 0.5A	60W	90-264 @ 47-440	5.0x3.0x1.7	2.9x2.5x0.2	50;120;50	3;4;1	1;2;1	76	EN/TUV/UL	16.95	15.49
216734	Mean Well	PT-65B	+5V @ 0.4-5.5A; +12V @ 0.2-2.5A -12V @ 0-0.5A	63.5W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50; 120;100	3.0	1.0	77	UL/CUL/TUV/CE	16.95	14.95
216726	Mean Well	PT-65C	+5V @ 0.4-5.5A; +15V @ 0.2-2A; -15V @ 0-0.5A	65W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50; 120;100	3.0	1.0	77	UL/CUL/TUV/CE	16.95	14.95
215707	Mean Well	PT-65D	+5V @ 0.5-5A; +12V @ 0.2-4A; +24V @ 0.2-1.3A	68W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50; 100;200	2.0	1.0	79	UL/CUL/TUV/CE	16.95	14.95

*Primary output **Medical rated §Efficiency

Enclosed Switching AC-to-DC Power Supplies

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies

★Web Code: EPS

Complete specifications available online

SP-150

HRPG-150

HRP-300

RSP-1500

NES-75

SE-600

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	EFF (%)§	PFC	Certification	Pricing 1	Pricing 10
Single Output													
2106685	Mean Well	RS-15-3.3	+3.3V @ 0-3A	9.9W	2.5 x 2.0 x 1.1	80	2.0	0.5	72	—	UL/CUL/TUV/CE/CB	$9.95	$8.95
693193	Mean Well	RS-25-3.3	+3.3V @ 0-6A	19.8W	3.0 x 2.0 x 1.1	80	2.0	0.5	72	—	UL/CUL/TUV/CE/CB	11.49	10.49
1954906	Mean Well**	PM-05-5	+5V @ 0-1A	5W	2.5 x 2.0 x 0.8	80	1.0	1.0	71	—	EN/IEC/TUV/UL	10.49	9.49
1919043	Mean Well	RS-15-5	+5V @ 0-3A	15W	2.5 x 2.0 x 1.1	80	1.5	0.5	77	—	UL/CUL/TUV/CE/CB	9.95	8.95
323282	Mean Well	RS-25-5	+5V @ 0-5A	25W	3.1 x 2.0 x 1.1	80	1.0	0.5	77	—	UL/CUL/TUV/CE/CB	11.49	10.49
323388	Mean Well	RS-50-5	+5V @ 0-10A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	15.95	14.49
323708	Mean Well	RS-100-5	+5V @ 0-16A	80W	6.3 x 3.8 x 1.5	80	1.0	0.5	77	—	UL/CUL/TUV/CE/CB	23.95	21.95
194791	Mean Well	SP-100-5	+5V @ 0-20A	100W	7.0 x 3.9 x 1.8	100	1.0	0.5	76	✔	UL/CUL/TUV/CE/CB	39.95	35.95
323821	Mean Well	RS-150-5	+5V @ 0-26A	130W	7.8 x 3.9 x 1.5	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	24.95	22.49
123394	Mean Well	S-150-5	+5V @ 0-30A	150W	7.0 x 4.3 x 2.0	150	0.5	0.5	78	—	UL/CUL/TUV/CE/CB	34.95	31.95
201912	Mean Well	SP-150-5	+5V @ 0-30A	150W	7.0 x 3.9 x 2.0	100	1.0	0.5	75	✔	UL/CUL/TUV/CE/CB	44.95	40.95
202042	Mean Well	SP-200-5	+5V @ 0-40A	200W	7.0 x 3.9 x 2.0	100	1.0	0.5	71	✔	UL/CUL/TUV/CE/CB	52.95	47.95
244735	Mean Well	SP-320-5	+5V @ 0-55A at 230VAC; 0-44A at 115VAC	275W	8.5 x 4.5 x 2.0	150	1.0	0.5	79	✔	UL/CUL/TUV/CE/CB	66.95	59.95
2172068	Mean Well	RSP-320-5	+5V @ 0-60A	300W	8.5 x 4.5 x 1.2	150	1.0	0.5	85	✔	UL/CUL/TUV/CB/CE	57.95	53.95
2149562	Mean Well	SE-350-5	+5V @ 0-60A	300W	8.5 x 4.5 x 2.0	150	2.0	0.5	78	—	UL/CUL	44.95	40.95
693644	Mean Well	SP-480-5	+5V @ 0-85A	425W	10.9 x 5.0 x 1.7	80	1.0	0.5	79	✔	UL/CUL/TUV/CE/CB	144.95	129.95
374002	Mean Well	SE-600-5	+5V @ 0-100A	500W	9.7 x 5.0 x 2.5	150	2.0	0.5	78	—	UL/CUL	84.95	77.95
693661	Mean Well	SP-750-5	+5V @ 0-120A	600W	10.9 x 5.0 x 2.5	120	2.0	0.5	80	✔	UL/CUL/TUV/CE/CB	199.95	189.95
394215	Mean Well	SP-320-7.5	+7.5V @ 0-40A	300W	8.5 x 4.5 x 2.0	150	1.0	0.5	83	✔	UL/CUL/TUV/CE/CB	66.95	59.95
1954551	Mean Well**	PM-10-12	+12V @ 0-0.85A	10.2W	2.8 x 2.0 x 0.9	150	1.0	0.5	78	—	EN/IEC/TUV/UL	11.95	10.95
1919051	Mean Well	RS-15-12	+12V @ 0-1.3A	15.6W	2.5 x 2.0 x 1.1	120	0.5	0.5	81	—	UL/CUL/TUV/CE/CB	9.95	8.95
323300	Mean Well	RS-25-12	+12V @ 0-2.1A	25.2W	3.0 x 2.0 x 1.1	120	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	11.49	10.49
123255	Mean Well	S-25-12	+12V @ 0-2.1A	25.2W	3.9 x 3.8 x 1.4	100	0.5	0.5	76	—	UL/TUV/CE	18.95	16.95
323337	Mean Well	RS-35-12	+12V @ 0-3A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	81	—	UL/CUL/TUV/CE/CB	12.95	11.49
123298	Mean Well	S-40-12	+12V @ 0-3.5A	42W	5.1 x 3.9 x 1.5	100	0.5	0.5	76	—	UL/CUL/TUV/CE/CB	21.95	19.95
323396	Mean Well	RS-50-12	+12V @ 0-4.2A	50.4W	3.9 x 3.8 x 1.4	120	0.5	0.5	81	—	UL/CUL/TUV/CE/CB	15.95	14.49
123335	Mean Well	S-60-12	+12V @ 0-5A	60W	6.3 x 3.8 x 1.5	120	0.5	0.5	76	—	UL/CUL/TUV/CE/CB	24.95	22.49
323599	Mean Well	RS-75-12	+12V @ 0-6A	72W	5.1 x 3.9 x 1.5	120	0.5	0.5	81	—	UL/CUL/TUV/CE/CB	16.95	15.49
194838	Mean Well	SP-75-12	+12V @ 0-6.3A	75.6W	7.0 x 3.9 x 1.3	80	0.5	0.5	77	✔	UL/CUL/TUV/CE/CB	33.95	30.95
2105017	Mean Well	NES-100-12	+12V @ 0-8.5A	102W	6.3 x 3.8 x 1.5	120	0.5	0.5	83	—	UL/CUL/CE/CB	21.95	19.49
123386	Mean Well	S-100F-12	+12V @ 0-8.5A	102W	7.8 x 3.9 x 1.5	125	0.5	0.5	80	—	UL/TUV/CE/CB	29.95	27.95
323716	Mean Well	RS-100-12	+12V @ 0-8.5A	102W	6.3 x 3.8 x 1.5	120	0.5	0.5	81	✔	UL/CUL/TUV/CE/CB	23.95	21.95
194803	Mean Well	SP-100-12	+12V @ 0-8.5A	102W	7.0 x 3.9 x 1.8	100	0.5	0.5	80	✔	UL/CUL/TUV/CE/CB	39.95	35.95
2172244	Mean Well**	MSP-100-12	+12V @ 0-8.5A	102W	6.3 x 3.8 x 1.5	120	0.8	0.3	87.5	✔	ANSI/AAMI/IEC	59.95	54.95
123423	Mean Well	S-150-12	+12V @ 0-12.5A	150W	7.0 x 4.3 x 2.0	180	0.3	0.3	82	—	UL/CUL/TUV/CE/CB	34.95	31.95
323839	Mean Well	RS-150-12	+12V @ 0-12.5A	150W	7.8 x 3.9 x 1.5	120	0.5	0.5	83	—	UL/CUL/TUV/CE/CB	24.95	22.49
2189118	Mean Well	RSP-150-12	+12V @ 0-12.5A	150W	7.8 x 3.9 x 1.2	100	0.5	0.5	90	✔	UL/CUL/CE	41.95	38.95
173421	Mean Well	SP-150-12	+12V @ 0-12.5A	150W	7.0 x 3.9 x 2.0	100	0.5	0.5	80	✔	UL/CUL/TUV/CE/CB	44.95	40.95
194774	Mean Well	SP-200-12	+12V @ 0-16.7A	200.4W	7.0 x 3.9 x 2.0	100	0.5	0.5	79	✔	UL/CUL/TUV/CE/CB	52.95	47.95
2101497	Mean Well	SP-240-12	+12V @ 0-20A	240W	7.5 x 3.7 x 2.0	150	0.5	0.3	86	✔	UL/CUL/TUV/CE/CB	52.95	47.95
2122706	Mean Well	SPV-300-12	+12V @ 0-25A	300W	8.5 x 4.5 x 1.9	150	0.5	0.3	83.5	—	EN/TUV/UL	74.95	69.95
207204	Mean Well	S-320-12	+12V @ 0-25A	300W	8.5 x 4.5 x 2.0	150	0.5	0.5	82	✔	UL/CUL	59.95	54.95
244743	Mean Well	SP-320-12	+12V @ 0-25A at 230VAC; 0-20A @ 115VAC	300W	8.5 x 4.5 x 2.0	150	0.5	0.3	86	✔	UL/CUL/TUV/CE/CB	66.95	59.95
2102203	Mean Well	HRP-300-12	+12V @ 0-27A	324W	7.8 x 4.1 x 1.6	120	0.5	0.3	88	✔	UL/CUL/TUV/CE/CB	79.95	72.95
2094872	Mean Well	HRPG-300-12	+12V @ 0-27A	324W	7.8 x 4.1 x 1.6	120	0.5	0.3	88	✔	UL/CUL/TUV/CE/CB	89.95	79.95
2166039	Mean Well**	MSP-300-12	+12V @ 0-27A	324W	7.8 x 4.1 x 1.6	120	0.5	0.3	88	✔	ANSI/AAMI/IEC	109.95	99.95
2149503	Mean Well	SE-350-12	+12V @ 0-29A	348W	8.5 x 4.5 x 2.0	150	1.0	0.5	83	—	UL/CUL	44.95	40.95
2094928	Mean Well	SE-450-12	+12V @ 0-37.5A	450W	8.9 x 4.9 x 2.0	200	1.0	0.5	83	✔	UL/CUL	69.95	63.95
2122319	Mean Well	HRP-450-12	+12V @ 0-37.5A	450W	8.6 x 4.1 x 1.6	120	0.5	0.3	88	✔	UL/CUL/TUV/CE/CB	114.95	104.95
2193352	Mean Well**	MSP-450-12	+12V @ 0-37.5A	450W	8.6 x 4.1 x 1.6	120	0.5	0.3	88	✔	UL/CUL/CB/CE	149.95	134.95
301373	Mean Well	SP-480-12	+12V @ 0-40A at 230VAC; 0-36A @ 115VAC	480W	10.9 x 5.0 x 1.7	120	0.5	0.3	85	✔	UL/CUL/TUV/CE/CB	144.95	129.95
190693	Mean Well	SP-500-12	+12V @ 0-40A at 230VAC; 0-34A @ 115VAC	480W	6.7 x 4.7 x 3.7	240	0.5	0.5	84	✔	UL/CUL/TUV/CE/CB	159.95	144.95

* Primary output ** Medical rated § Efficiency

Continued on next page

★*For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box*

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Enclosed Switching AC-to-DC Power Supplies (Continued)

Complete specifications available online

- 100% full-load burn-in test
- Wide AC input range
- Manufacturer warranty varies

★Web Code: EPS

PSP-600

RS-25

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	EFF (%) §	PFC	Certification	Pricing: 1	Pricing: 10
Single Output (Continued)													
2197978	Mean Well	RSP-500-12	+12V @ 0-41.7A	500.4W	9.1 x 5.0 x 1.6	150	0.5	0.3	89	✔	UL/CUL/TUV/CB/CE	$109.95	$99.95
374011	Mean Well	SE-600-12	+12V @ 0-50A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	83	—	UL/CUL	84.95	77.95
374214	Mean Well	PSP-600-12	+12V @ 0-50A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	84	✔	UL/CUL/TUV/CE/CB	134.95	119.95
2094961	Mean Well	HRPG-600-12	+12V @ 0-53A	636W	8.6 x 4.1 x 2.5	120	0.5	0.3	88	✔	UL/CUL/TUV/CE/CB	139.95	124.95
2204761	Mean Well**	MSP-600-12	+12V @ 0-53A	636W	8.6 x 4.1 x 1.6	120	0.5	0.3	88	✔	UL/CUL/CB/CE	169.95	154.95
319944	Mean Well	SP-750-12	+12V @ 0-62A	750W	10.9 x 5.0 x 2.5	120	0.5	0.3	85	✔	UL/CUL/TUV/CE/CB	199.95	179.95
2101542	Mean Well	SE-1000-12	+12V @ 0-83.3A	999.6W	10.9 x 5 x 2.5	150	0.5	0.5	85	—	UL/CUL	174.95	159.95
694911	Mean Well	RSP-1500-12	+12V @ 0-125A	1500W	10.9 x 5 x 3.3	150	0.5	0.5	87	✔	EN/TUV/UL	349.95	324.95
2107944	Mean Well	SPV-1500-12	+12V @ 0-125A	1500W	10.9 x 5 x 3.3	150	0.5	0.5	86.5	✔	EN/TUV/UL	399.95	359.95
202025	Mean Well	S-150-13.5	+13.5V @ 0-11.2A	151.2W	7.0 x 4.3 x 2.0	180	0.3	0.3	77	—	UL/CUL/TUV/CE/CB	34.95	31.95
212410	Mean Well	SP-200-13.5	+13.5V @ 0-14.9A	201.1W	7.0 x 3.9 x 2.0	100	0.5	0.5	80	✔	UL/CUL/TUV/CE/CB	52.95	47.95
693599	Mean Well	SP-320-13.5	+13.5V @ 0-22A	297W	8.5 x 4.5 x 2.0	150	0.5	0.3	86	✔	UL/CUL/TUV/CE/CB	66.95	59.95
212389	Mean Well	SP-500-13.5	+13.5V @ 0-36A at 230VAC; 0-30.6A @ 115VAC	486W	6.7 x 4.7 x 3.7	240	0.5	0.5	84	✔	UL/CUL/TUV/CE/CB	149.95	134.95
2106079	Mean Well	PSP-600-13.5	+13.5V @ 0-44.5A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	85	✔	UL/CUL/TUV/CE/CB	139.95	124.95
2105447	Mean Well†	AD-55A	+13.8V @ 0-4A	51.4W	6.3 x 3.8 x 1.5	100	0.5	0.5	71	—	UL/CUL/TUV/CE/CB	27.95	25.95
2105439	Mean Well†	AD-155A	+13.8V @ 0-5A 10.5A	151.6W	7.8 x 4.3 x 2.0	150	0.5	0.5	80	✔	UL/CUL/TUV/CE/CB	54.95	48.95
1919060	Mean Well	RS-15-15	+15V @ 0-1A	15W	2.5 x 2.0 x 1.1	120	0.5	0.5	81	—	UL/CUL/TUV/CE/CB	9.95	8.95
323302	Mean Well	RS-25-15	+15V @ 0-1.7A	25.5W	3.0 x 2.0 x 1.1	120	0.5	0.5	82	—	UL/CUL/TUV/CE/CB	11.49	10.49
323345	Mean Well	RS-35-15	+15V @ 0-2.4A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	83	—	UL/CUL/TUV/CE/CB	12.95	11.49
123343	Mean Well	S-60-15	+15V @ 0-4A	60W	6.3 x 3.8 x 1.5	150	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	24.95	22.49
323602	Mean Well	RS-75-15	+15V @ 0-5A	75W	5.1 x 3.9 x 1.5	120	0.5	0.5	82	—	UL/CUL/TUV/CE/CB	16.95	15.49
194845	Mean Well	SP-75-15	+15V @ 0-5A	75W	7.0 x 3.8 x 1.3	80	0.5	0.5	80	✔	UL/CUL/TUV/CE/CB	33.95	30.95
323724	Mean Well	RS-100-15	+15V @ 0-7A	105W	6.3 x 3.8 x 1.5	120	0.5	0.5	82	—	UL/CUL/TUV/CE/CB	23.95	21.95
323847	Mean Well	RS-150-15	+15V @ 0-10A	150W	7.8 x 3.9 x 1.5	120	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	24.95	22.49
123432	Mean Well	S-150-15	+15V @ 0-10A	150W	7.0 x 4.3 x 2.0	180	0.3	0.3	85	—	UL/CUL/TUV/CE/CB	34.95	31.95
173412	Mean Well	SP-150-15	+15V @ 0-10A	150W	7.0 x 3.9 x 2.0	100	0.5	0.5	86.5	✔	UL/CUL/TUV/CE/CB	41.95	37.95
202060	Mean Well	SP-200-15	+15V @ 0-13.4A	201W	7.0 x 3.9 x 2.0	100	0.5	0.5	81	✔	UL/CUL/TUV/CE/CB	52.95	47.95
693610	Mean Well	SP-320-15	+15V @ 0-20A	300W	8.5 x 4.5 x 2.0	150	0.5	0.3	86	✔	UL/CUL/TUV/CE/CB	66.95	59.95
693652	Mean Well	SP-480-15	+15V @ 0-35A	480W	10.9 x 5.0 x 1.7	150	0.5	0.3	85	✔	UL/CUL/TUV/CE/CB	129.95	114.95
291522	Mean Well	SE-600-15	+15V @ 0-40A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	84	—	UL/CUL	84.95	77.95
374222	Mean Well	PSP-600-15	+15V @ 0-40A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	85	✔	UL/CUL/TUV/CE/CB	139.95	124.95
1585696	Mean Well	RSP-1000-15	+15V @ 0-50A	750W	11.6 x 5.0 x 1.6	150	0.5	0.5	85	✔	UL/CUL/TUV/CE	239.95	224.95
694920	Mean Well	RSP-1500-15	+15V @ 0-100A	1500W	10.9 x 5.0 x 3.3	150	0.5	0.5	87	✔	UL/CUL/TUV/CE/CB	374.95	349.95
2193168	Mean Well	IRM-05-24	+24V @ 0-0.23A	5.52W	1.8 x 1.0 x 0.9	200	0.5	0.3	77	—	UL/CUL/CB/CE/TUV	7.49	6.75
1954560	Mean Well**	PM-10-24	+24V @ 0-0.42A	10.08W	2.8 x 2.0 x 0.9	240	0.5	0.5	79	—	EN/IEC/TUV/UL	11.95	10.95
1919078	Mean Well	RS-15-24	+24V @ 0-0.625A	15W	2.5 x 2.0 x 1.1	200	0.5	0.5	82	—	UL/CUL/TUV/CE/CB	9.95	8.95
323311	Mean Well	RS-25-24	+24V @ 0-1.1A	26.4W	3.0 x 2.0 x 1.1	120	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	11.49	10.49
123272	Mean Well	S-25-24	+24V @ 0-1.1A	26.4W	3.9 x 3.8 x 1.4	100	0.5	0.5	80	—	UL/TUV/CE	18.95	16.95
323353	Mean Well	RS-35-24	+24V @ 0-1.5A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	12.95	11.49
123319	Mean Well	S-40-24	+24V @ 0-1.8A	43W	5.1 x 3.9 x 1.5	100	0.5	0.5	78	—	UL/CUL/TUV/CE/CB	19.95	18.95
323417	Mean Well	RS-50-24	+24V @ 0-2.2A	52.8W	3.9 x 3.8 x 1.4	120	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	15.95	14.49
123352	Mean Well	S-60-24	+24V @ 0-2.5A	60W	6.3 x 3.8 x 1.5	150	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	24.95	22.49
323620	Mean Well	RS-75-24	+24V @ 0-3.2A	76.8W	5.1 x 3.9 x 1.5	120	0.5	0.5	85	—	UL/CUL/TUV/CE/CB	16.95	15.49
2104250	Mean Well	NES-75-24	+24V @ 0-3.2A	76.8W	6.3 x 3.8 x 1.5	200	0.5	0.5	86	—	UL/CUL/CE/CB	17.95	16.49
194812	Mean Well	SP-100-24	+24V @ 0-4.2A	100.8W	7.0 x 3.9 x 1.8	150	0.5	0.5	84	✔	UL/CUL/TUV/CE/CB	36.95	34.49
2190291	Mean Well	SE-100-24	+24V @ 0-4.5A	108W	6.0 x 3.8 x 1.5	120	0.5	0.5	86	—	UL/CUL/CB/CE	19.95	17.95
323732	Mean Well	RS-100-24	+24V @ 0-4.5A	108W	6.3 x 3.8 x 1.5	120	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	23.95	21.95
201971	Mean Well	S-100F-24	+24V @ 0-4.5A	108W	7.8 x 3.9 x 1.5	150	0.5	0.5	83	—	UL/TUV/CE/CB	29.95	27.95
2172261	Mean Well**	MSP-100-24	+24V @ 0-4.5A	108W	6.3 x 3.8 x 1.5	150	0.5	0.2	88.5	✔	ANSI/AAMI/IEC	59.95	54.95
155651	Power One	MAP110-1024CM	+24V @ 5A or +28V @ 4.3A	120W	7.0 x 4.3 x 1.8	240	0.5	1.0	75	—	UL/CSA/TUV	21.95	19.95

*Primary Output **Medical rated †UPS function § Efficiency

Enclosed Switching AC-to-DC Power Supplies (Continued)

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies

SP-200

★Web Code: EPS

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	EFF (%)§	PFC	Certification	Pricing 1	Pricing 10
Single Output (Continued)													
173404	Mean Well	SP-150-24	+24V @ 0-6.25A	150W	7.0 x 3.9 x 2.0	150	0.5	0.5	83	✔	UL/CUL/TUV/CE/CB	$44.95	$40.95
323855	Mean Well	RS-150-24	+24V @ 0-6.5A	156W	7.8 x 3.9 x 1.5	120	0.5	0.5	86	—	UL/CUL/TUV/CE/CB	24.95	22.49
2135523	TDK/Lambda	HWS150-24/A	+24V @ 0-6.5A	156W	6.3 x 1.7 x 3.2	150	0.5	0.3	85	—	UL/CSA/CE/EN/IEC	44.95	41.95
2101868	Mean Well	HRP-150-24	+24V @ 0-6.5A	156W	6.3 x 3.8 x 1.5	150	0.5	0.2	88	✔	UL/CUL/TUV/CE/CB	54.95	49.95
2094864	Mean Well	HRPG-150-24	+24V @ 0-6.5A	156W	6.3 x 3.8 x 1.5	150	0.5	0.3	87	✔	UL/CUL/TUV/CE/CB	64.95	58.95
194782	Mean Well	SP-200-24	+24V @ 0-8.4A	201.6W	7.0 x 3.9 x 2.0	150	0.5	0.5	83	✔	UL/CUL/TUV/CE/CB	52.95	47.95
2172341	Mean Well**	MSP-200-24	+24V @ 0-8.4A	201.6W	7.8 x 3.9 x 1.5	150	0.5	0.2	88	✔	ANSI/AAMI/IEC	89.95	79.95
2101518	Mean Well	SP-240-24	+24V @ 0-10A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	87	✔	UL/CUL/TUV/CE/CB	52.95	47.95
196657	Mean Well	S-320-24	+24V @ 0-12.5A	300W	8.5 x 4.5 x 2.0	150	0.5	0.5	86	—	UL/CUL	64.95	59.95
2122714	Mean Well	SPV-300-24	+24V @ 0-12.5A	300W	8.5 x 4.5 x 1.9	150	0.5	0.2	85	✔	EN/TUV/UL	74.95	69.95
244752	Mean Well	SP-320-24	+24V @ 0-13A	312W	8.5 x 4.5 x 2.0	150	0.5	0.2	87	✔	UL/CUL/TUV/CE/CB	66.95	59.95
2102220	Mean Well	HRP-300-24	+24V @ 0-14A	336W	7.7 x 4.1 x 1.6	150	0.5	0.2	87	✔	UL/CUL/TUV/CE/CB	79.95	72.95
2094881	Mean Well	HRPG-300-24	+24V @ 0-14A	336W	7.8 x 4.1 x 1.6	150	0.5	0.3	87	✔	UL/CUL/TUV/CE/CB	89.95	79.95
2166055	Mean Well**	MSP-300-24	+24V @ 0-14A	336W	7.8 x 4.1 x 1.6	150	0.5	0.2	87	✔	ANSI/AAMI/IEC	109.95	99.95
2146564	Mean Well	SE-350-24	+24V @ 0-14.6A	350.4W	8.5 x 4.5 x 2.0	150	0.5	0.5	87	—	UL/CUL	44.95	40.95
2101606	Mean Well	SE-450-24	+24V @ 0-18.8A	451.2W	8.9 x 4.9 x 2.0	200	0.5	0.2	86	—	UL/CUL	69.95	63.95
2122335	Mean Well	HRP-450-24	+24V @ 0-18.8A	451.2W	8.6 x 4.1 x 1.6	150	0.5	0.2	88	✔	UL/CUL/TUV/CE/CB	124.95	114.95
2193379	Mean Well**	MSP-450-24	+24V @ 0-18.8A	451.2W	8.6 x 4.1 x 1.6	150	0.5	0.2	88	✔	UL/CUL/CB/CE	149.95	134.95
301322	Mean Well	SP-480-24	+24V @ 0-20A	480W	10.9 x 5.0 x 1.7	150	0.5	0.2	87	✔	UL/CUL/TUV/CE/CB	129.95	114.95
147054	Mean Well	SP-500-24	+24V @ 0-20A	480W	6.7 x 4.7 x 3.7	240	0.5	0.5	85.5	✔	UL/CUL/TUV/CE/CB	159.95	144.95
2197994	Mean Well	RSP-500-24	+24V @ 0-21A	504W	9.1 x 5.0 x 1.6	150	0.5	0.2	89	✔	UL/CUL/TUV/CB/CE	109.95	99.95
295902	Mean Well	SE-600-24	+24V @ 0-25A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	87	—	UL/CUL	84.95	77.95
374231	Mean Well	PSP-600-24	+24V @ 0-25A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	86	✔	UL/CUL/TUV/CE/CB	139.95	124.95
2204787	Mean Well**	MSP-600-24	+24V @ 0-27A	648W	8.6 x 4.1 x 2.5	150	0.5	0.2	88	✔	UL/CUL/CB/CE	159.95	144.95
320048	Mean Well	SP-750-24	+24V @ 0-31.3A	750W	10.9 x 5.0 x 2.5	120	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	214.95	194.95
2172121	Mean Well	RSP-750-24	+24V @ 0-31.3A	751.2W	9.8 x 5.0 x 1.6	150	0.5	0.5	90.5	✔	EN/TUV/UL	179.95	164.95
1585717	Mean Well	RSP-1000-24	+24V @ 0-40A	960W	11.6 x 5.0 x 1.6	150	0.5	0.5	88	✔	UL/CUL/TUV/CE/CB	264.95	239.95
2101569	Mean Well	SE-1000-24	+24V @ 0-41.7A	1000.8W	10.9 x 5.0 x 2.5	200	0.5	0.5	88	—	UL/CUL	184.95	169.95
694938	Mean Well	RSP-1500-24	+24V @ 0-63A	1512W	10.9 x 5.0 x 3.3	150	0.5	0.5	90	✔	UL/CUL/TUV/CE/CB	374.95	349.95
2106714	Mean Well	RSP-2400-24	+24V @ 0-100A	2400W	10.9 x 7.0 x 2.5	150	0.5	0.5	90	✔	EN/TUV/UL	449.95	414.95
2106749	Mean Well	RSP-3000-24	+24V @ 0-125A	3000W	10.9 x 7.0 x 2.5	150	0.5	0.5	90	✔	EN/TUV/UL	499.95	449.95
693513	Mean Well	SP-150-27	+27V @ 0-5.6A	151.2W	7.8 x 3.9 x 2.0	15	0.5	0.5	84	—	UL/CUL/TUV/CE/CB/PFC	42.95	38.95
693548	Mean Well	SP-200-27	+27V @ 0-7.5A	202.5W	7.0 x 3.9 x 2.0	150	0.5	0.5	83	✔	UL/CUL/TUV/CE/CB	48.95	44.95
693628	Mean Well	SP-320-27	+27V @ 0-11.7A	315.9W	8.5 x 4.5 x 2.0	200	0.5	0.2	88	✔	UL/CUL/TUV/CE/CB	61.95	56.95
190706	Mean Well	SP-500-27	+27V @ 0-18A	486W	6.7 x 4.7 x 3.7	200	0.5	0.5	86.5	✔	UL/CUL/TUV/CE/CB	159.95	144.95
295911	Mean Well	SE-600-27	+27V @ 0-22.2A	599.4W	9.7 x 5.0 x 2.5	150	0.5	0.5	87	—	UL/CUL	84.95	77.95
374257	Mean Well	PSP-600-27	+27V @ 0-22.2A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	86	✔	UL/CUL/TUV/CE/CB	134.95	119.95
374038	Mean Well	SP-750-27	+27V @ 0-27.8A	750W	10.9 x 5.0 x 2.5	120	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	174.95	159.95
1585709	Mean Well	RSP-1000-27	+27V @ 0-37.0A	999W	11.6 x 5.0 x 1.6	150	0.5	0.5	88	✔	UL/CUL/TUV/CE/CB	239.95	214.95
694946	Mean Well	RSP-1500-27	+27V @ 0-56A	1512W	10.9 x 5.0 x 3.3	150	0.5	0.5	90	✔	UL/CUL/TUV/CE/CB	339.95	319.95
2102983	Mean Well	PB-120N-27C	+27.6V @ 0-4.3A	118.7W	7.1 x 3.8 x 1.9	150	£	£	79	—	UL/CUL/TUV/CE/CB	44.95	39.95
2146118	Mean Well	AD-155B	+27.6V @ 0-5.5A	152W	7.8 x 4.3 x 2.0	150	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	54.95	48.95
2102473	Mean Well	SP-240-30	+30V @ 0-8A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	88	✔	UL/CUL/TUV/CE/CB	52.95	47.95
2101024	Mean Well	HRP-75-36	+36V @ 0-2.1A	75.6W	5.1 x 3.9 x 1.5	200	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	41.95	37.95
2102730	Mean Well	SP-320-36	+36V @ 0-8.8A	316.8W	8.5 x 4.5 x 2.0	220	0.5	0.2	87	✔	UL/CUL/TUV/CE/CB	66.95	59.95
2102318	Mean Well	HRP-300-36	+36V @ 0-14A	324W	7.8 x 4.1 x 1.6	250	0.5	0.2	88	✔	EN/TUV/UL	76.95	69.95
2104524	Mean Well	SE-600-36	+36V @ 0-16.6A	598W	9.7 x 5.0 x 2.5	200	0.5	0.5	87	—	UL/CUL	84.95	77.95
2101753	Mean Well	HRPG-600-36	+36V @ 0-17.5A	630W	8.6 x 4.1 x 2.5	200	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	159.95	139.95
693206	Mean Well	RS-25-48	+48V @ 0-0.57A	27.4W	3.1 x 2.0 x 1.1	200	0.5	0.5	85	—	UL/CUL/TUV/CE/CB	11.49	10.49
693249	Mean Well	RS-50-48	+48V @ 0-1.1A	52.8W	3.9 x 3.8 x 1.4	200	0.5	0.5	86	—	UL/CUL/TUV/CE/CB	15.95	14.49
693290	Mean Well	RS-100-48	+48V @ 0-2.3A	110.4W	6.3 x 3.8 x 1.5	200	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	23.95	21.95
167346	Mean Well	S-150-48	+48V @ 0-3.2A	153.6W	7.0 x 4.3 x 2.0	240	0.2	0.2	83	—	UL/CUL/TUV/CE/CB	32.95	29.95
201930	Mean Well	SP-150-48	+48V @ 0-3.2A	153.6W	7.0 x 3.9 x 2.0	250	0.5	0.5	83	✔	UL/CUL/TUV/CE/CB	44.95	40.95
323863	Mean Well	RS-150-48	+48V @ 0-3.3A	158.4W	7.8 x 3.9 x 1.5	200	0.5	0.5	87	—	UL/CUL/TUV/CE/CB	24.95	22.49
202068	Mean Well	SP-200-48	+48V @ 0-4.2A	201.6W	7.0 x 3.9 x 2.0	250	0.5	0.5	84	✔	UL/CUL/TUV/CE/CB	49.95	44.95
2102481	Mean Well	SP-240-48	+48V @ 0-5A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	52.95	47.95
2197855	TDK Lambda	SWS300-48	+48V @ 0-6.7A	321.6W	7.8 x 4.0 x 2.0	240	0.1	0.2	86	✔	UL/CSA/CE	49.95	44.95

*Primary Outpu **Medical rated § Efficiency £ Load/line regulation is dependent on battery current requirement

Continued on next page

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Enclosed Switching AC-to-DC Power Supplies (Continued)

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies

RQ-65

★Web Code: EPS

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	EFF (%) §	PFC	Certification	Pricing: 1	Pricing: 10
Single Output (Continued)													
244770	Mean Well	SP-320-48	+48V @ 0-6.7A	321.6W	8.5 x 4.5 x 2.0	240	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	$66.95	$59.95
2149554	Mean Well	SE-350-48	+48V @ 0-7.3A	350W	8.5 x 4.5 x 2.0	240	0.5	0.5	87.5	—	UL/CUL	44.95	40.95
2105164	Mean Well	SE-450-48	+48V @ 0-9.4A	451.2W	8.9 x 4.9 x 2.0	200	0.5	0.2	88	—	UL/CUL	69.95	63.95
2122360	Mean Well	HRP-450-48	+48V @ 0-9.5A	456W	8.6 x 4.1 x 1.6	240	0.5	0.2	89.5	✔	EN/TUV/UL	124.95	114.95
301402	Mean Well	SP-480-48	+48V @ 0-11A	480W	10.9 x 5.0 x 1.7	240	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	144.95	129.95
161796	Mean Well	SP-500-48	+48V @ 0-10A	480W	6.7 x 4.7 x 3.7	300	0.5	0.5	87	✔	UL/CUL/TUV/CE/CB	159.95	144.95
2198014	Mean Well	RSP-500-48	+48V @ 0-10.5A	504W	9.1 x 5.0 x 1.6	150	0.5	0.2	90.5	✔	UL/CUL/TUV/CB/CE	109.95	99.95
295929	Mean Well	SE-600-48	+48V @ 0-12.5A	600W	9.7 x 5.0 x 2.5	200	0.5	0.5	88	—	UL/CUL	84.95	77.95
374249	Mean Well	PSP-600-48	+48V @ 0-12.5A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	87	✔	UL/CUL/TUV/CE/CB	134.95	119.95
2101577	Mean Well	SE-1000-48	+48V @ 0-20.8A	998.4W	10.9 x 5.0 x 2.5	200	0.5	0.5	89	—	UL/CUL	184.95	169.95
1585725	Mean Well	RSP-1000-48	+48V @ 0-21.0A	1008W	11.6 x 5.0 x 1.6	150	0.5	0.5	90	✔	UL/CUL/TUV/CE/CB	239.95	219.95
694954	Mean Well	RSP-1500-48	+48V @ 0-32.0A	1536W	10.9 x 5.0 x 3.3	200	0.5	0.5	91	✔	UL/CUL/TUV/CE/CB	374.95	349.95
2106722	Mean Well	RSP-2400-48	+48V @ 0-50A	2400W	10.9 x 7.0 x 2.5	200	0.5	0.5	91.5	✔	EN/TUV/UL	489.95	439.95
2108921	Mean Well	RSP-3000-48	+48V @ 0-62.5A	3000W	10.9 x 7.0 x 2.5	200	0.5	0.5	90.5	✔	UL/CUL/TUV/CE/CB	524.95	474.95
Double Output													
323362	Mean Well	RD-35A	+5V @ 0.3-4A; +12V @ 0.2-1A	32W	3.9 x 3.2 x 1.4	80	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	$14.49	$13.49
323380	Mean Well	RD-35B	+5V @ 0.3-4A; +24V @ 0.2-1.3A	51.2W	3.9 x 3.2 x 1.4	80	0.5	0.5	82	—	UL/CUL/TUV/CE/CB	14.49	13.49
323433	Mean Well	RD-50B	+5V @ 0.3-6A; +24V @ 0.2-2A	53.6W	3.9 x 3.8 x 1.4	80	0.5	0.5	80	—	UL/CUL/TUV/CE/CB	23.95	21.49
323425	Mean Well	RD-50A	+5V @ 0.3-6A; +12V @ 0.3-3A	54W	3.9 x 3.8 x 1.4	80	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	23.95	21.49
323505	Mean Well	RD-65A	+5V @ 0.3-8A; +12V @ 0.2-4A	66W	5.1 x 3.9 x 1.5	80	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	19.95	18.49
323513	Mean Well	RD-65B	+5V @ 0.3-8A; +24V @ 0.2-3A	68W	5.1 x 3.9 x 1.5	80	0.5	0.5	78	—	UL/CUL/TUV/CE/CB	19.95	18.49
323628	Mean Well	RD-85A	+5V @ 2.0-10A; +12V @ 0.3-5A	88W	6.3 x 3.8 x 1.5	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	37.95	33.49
132397	Mean Well	D-120B	+5V @ 2.0-6A; +24V @ 0.4-4A	126W	7.0 x 3.9 x 2.0	60	0.5	0.5	78	—	UL/CUL/TUV/CE/CB	39.95	36.95
323741	Mean Well	RD-125A	+5V @ 2.0-15A; +12V @ 0.5-10A	130.9W	7.8 x 3.9 x 1.5	80	3.0	1.0	82	—	UL/CUL/TUV/CE/CB	32.95	29.95
2106124	Mean Well	RD-125-1224	+12V @ 1.0-3.7A; +24V @ 0.4-3.7A	133.2W	7.8 x 3.9 x 1.5	120	1.0	0.5	85	—	UL/CUL/TUV/CE/CB	32.95	29.95
323759	Mean Well	RD-125B	+5V @ 2.0-10A; +24V @ 0.4-5A	133.4W	7.8 x 3.9 x 1.5	80	3.0	1.0	82	—	UL/CUL/TUV/CE/CB	32.95	29.95
Triple Output													
323460	Mean Well	RT-50B	+5V @ 0.5-5A; +12V @ 0.2-2.5A; -12V @ 0.1-1A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	77	—	UL/CUL/TUV/CE/CB	$20.95	$19.49
323468	Mean Well	RT-50C	+5V @ 0-5A; +15V @ 0.2-2A; -15V @ 0.1-1A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	20.95	19.49
323476	Mean Well	RT-50D	+5V @ 0.5-5A; +12V @ 0.1-1A; +24V @ 0.2-1.5A	51W	3.9 x 3.8 x 1.4	80	1.0	0.5	80	—	UL/CUL/TUV/CE/CB	20.95	19.49
123482	Mean Well	T-60B	+5V @ 0.5-5A; +12V @ 0.2-2.5A; -12V @ 0-0.5A	61W	6.3 x 3.8 x 1.5	100	1.0	0.5	72	—	UL/CUL/TUV/CE/CB	29.95	26.95
323540	Mean Well	RT-65B	+5V @ 0.5-8A; +12V @ 0.2-3.5A; -12V @ 0-1A	64.6W	5.1 x 3.9 x 1.5	80	1.0	0.5	77	—	UL/CUL/TUV/CE/CB	23.95	21.49
323548	Mean Well	RT-65C	+5V @ 0.5-8A; +15V @ 0.2-3A; -15V @ 0-1A	65.5W	5.1 x 3.9 x 1.5	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	23.95	21.49
323555	Mean Well	RT-65D	+5V @ 0.5-8A; +12V @ 0.1-1A; +24V @ 0.2-2A	68W	5.1 x 3.9 x 1.5	80	1.0	0.5	79	—	UL/CUL/TUV/CE/CB	21.95	19.95
323775	Mean Well	RT-125B	+5V @ 2-15A; +12V @ 0.5-6A; -12V @ 0.1-1A	132W	7.8 x 3.9 x 1.5	80	1.0	0.5	80	—	UL/CUL/TUV/CE/CB	34.95	31.49
323783	Mean Well	RT-125C	+5V @ 2-15A; +15V @ 0.5-6A; -15V @ 0.1-1A	132.5W	7.8 x 3.9 x 1.5	80	1.0	0.5	81	—	UL/CUL/TUV/CE/CB	34.95	31.49
323792	Mean Well	RT-125D	+5V @ 2-15A; +12V @ 0.1-2A; +24V @ 0.4-4A	136W	7.8 x 3.9 x 1.5	80	1.0	0.5	82	—	UL/CUL/TUV/CE/CB	34.95	31.49
Quad Output													
323484	Mean Well	RQ-50B	+5V @ 0.5-6A; +12V @ 0.2-1.5A; -5V @ 0-1A; -12V @ 0-1A	45.5W	3.9 x 3.8 x 1.4	80	0.5	0.5	74	—	UL/CUL/TUV/CE/CB	$21.95	$19.95
323564	Mean Well	RQ-65B	+5V @ 0.5-8A; +12V @ 0.2-3A; -5V @ 0.1-1.5A; -12V @ 0-1A	62.5W	5.1 x 3.9 x 1.5	80	0.5	0.5	76	—	UL/CUL/TUV/CE/CB	20.95	19.95
323572	Mean Well	RQ-65D	+5V @ 0.5-8A; +12V @ 0.2-3A; +24V @ 0.1-1.5A; -12V @ 0-1A	68W	5.1 x 3.9 x 1.5	80	0.5	0.5	78	—	UL/CUL/TUV/CE/CB	20.95	19.95
323695	Mean Well	RQ-85D	+5V @ 2-10A; +12V @ 0.3-4A; +24V @ 0.1-1.5A; -12V @ 0-1A	84W	6.3 x 3.8 x 1.5	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	31.95	29.95
323803	Mean Well	RQ-125B	+5V @ 2-12A; +12V @ 0.5-4.5A; -5V @ 0.1-1A; -12V @ 0-1A	120W	7.0 x 3.9 x 2.0	80	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	36.95	33.95
323812	Mean Well	RQ-125D	+5V @ 2-12A; +12V @ 0.5-4A; +24V @ 0.1-2.5A; -12V @ 0-1A	124W	7.8 x 3.9 x 1.5	80	1.0	0.5	82	—	UL/CUL/TUV/CE/CB	39.95	35.95
213648	Mean Well	QP-150F	+5V @ 3-15A; +15V @ 0-5A; +24V @ 0.4-3A; -15V @ 0-1A	152W	7.8 x 3.9 x 1.5	120	2.0	1.0	78	✔	UL/CUL/TUV/CE/CB	86.95	79.95
213752	Mean Well	QP-200D	+5V @ 3-20A; +12V @ 0-6A +24V @ 0.4-5A; -12V @ 0-1A	204.9W	7.8 x 3.9 x 2.0	100	2.0	1.0	75	✔	UL/CUL/TUV/CE/CB	99.95	89.95
668764	Mean Well	QP-320D	+5V @ 2.5-20A; +12V @ 0-10A; +24V @ 0.2-5A; -12V @ 0.2-2A	316W	8.5 x 4.5 x 2.0	100	2.0	1.0	83	✔	UL/CUL/TUV/CE	119.95	108.95

*Primary output § Efficiency

LED Enclosed Power Supplies

For Indoor and Outdoor Applications

★Web Code: LPP

- Suitable for LED lighting and moving sign applications
- Cooling by free air convection
- Short-circuit/overload/over voltage/over temperature protection
- 100% full-load burn-in test
- UL1310 class 2 power unit
- Universal AC input/full range

PLN Series

CLG Series

FEATURES	Series										
	APC	APV	CLG	ELN/LPC/LPV/PLN	HLG	LPF	PLC	PLP	PCP	PWM	OWA
Case	Plastic	Plastic	Metal	Plastic	Metal	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic
Working Temperature (°C)	-30 to 70	-30 to 70	-30 to 70	-30 to 50	-30 to 70	-35 to 70	-30 to 50	-30 to 70	-40 to 80	-40 to 70	-40 to 70
Voltage (CV or AV) §	AV	CV	AV	CV	AV	CV	AV	CV	AV	CV	CV
Current (CC or AC) §	CC	AC	AC	CC	CC	CC	AC	AC	CC	CC	CC
Inrush Current (A/VAC)	70/230	70/230	40/230	40/230	75/230	45/230	40/230	42/230	10/115, 230	50/230	30/115; 60/230
PFC Function	✓	—	✓	—	✓	✓	✓	✓	✓	✓	✓
Warranty	2 Year	2 Year	3 Year	2 Year	3 Year	5 Year	2 Year	2 Year	3 Year	5 Year	5 Year

§ **CV:** constant voltage; **AV:** adjustable voltage; **CC:** constant current; **AC:** adjustable current

Part No.	Manufacturer	Mfr. Part No.	Output		Input Voltage (VAC @ Hz)	Size (L" x W" x H")	Enclosure Rating	Load Reg. (±%)*	Line Reg. (±%)*	Certification	Pricing	
			Voltage @ Current (min-max)	Power (W)							1	10
2142053	Mean Well	APV-12-5	+5V @ 0-2A	10	90-264 @ 47-63	3.0 x 1.6 x 1.1	—	2.0	1.0	TUV/EN/UL	$6.95	$6.25
2103249	Mean Well	LPV-60-5	+5V @ 0-8A	40	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	6.0	1.0	CAN/CSA/EN/IP/TUV/UL	16.95	15.49
2215136	Mean Well	OWA-90U-12	+7.2-12V @ 0-7.5A	90	90-264 @ 47-63	6.7 X 2.5 X 1.5	IP67	1.5	0.5	UL/CUL	43.95	38.95
2215005	Mean Well	NPF-90-12	+7.2-12V @ 0-7.5A	90	90-305 @ 47-63	6.7 x 2.5 x 1.5	IP67	1.5	0.5	UL/CUL/CB/CE/ENC	44.95	40.95
2214918	Mean Well	NPF-90D-12	+7.2-12V @ 0-7.5A	90	90-305 @ 47-63	6.7 x 2.5 x 1.5	IP67	1.5	0.5	UL/CUL/CB/CE/ENC	46.95	42.95
2141026	Mean Well	PCD-16-1400A	+8-12V @ 0-1.4A	16.8	90-135 @ 47-63	3.3 x 2.2 x 1.2	—	—	—	UL/CSA/EN/IP/TUV	19.95	17.95
2215144	Mean Well	OWA-90U-15	+9-15V @ 0-6A	90	90-264 @ 47-63	6.7 X 2.5 X 1.5	IP67	1.0	0.5	UL/CUL	43.95	38.95
2101315	Mean Well	LPC-60-1400	+9-42V @ 0-1.4A	59.5	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	EN/IP/TUV/UL	17.95	15.95
2101147	Mean Well	LPC-60-1050	+9-48V @ 0-1.05A	50.4	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	EN/IP/TUV/UL	17.95	16.49
2142061	Mean Well	APV-12-12	+12V @ 0-1A	12	90-264 @ 47-63	3.0 x 1.6 x 1.1	—	2.0	1.0	CE	6.95	6.25
2102596	Mean Well	LPV-20-12	+12V @ 0-1.67A	20	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	10.49	9.49
2164076	Mean Well	APV-25-12	+12V @ 0-2.1A	25.2	90-264 @ 47-63	3.3 x 2.2 x 1.2	—	2.0	1.0	EN/UL	10.95	9.95
1954404	Mean Well	PLN-30-12	+12V @ 0-2.5A	30	90-295 @ 47-63	5.7 x 1.9 x 1.2	IP64	5.0	3.0	UL/CUL/TUV/CE	20.95	18.95
2164121	Mean Well	APV-35-12	+12V @ 0-3A	36	90-264 @ 47-63	3.3 x 2.2 x 1.2	—	2.0	1.0	EN/UL	11.95	10.95
2103142	Mean Well	LPV-35-12	+12V @ 0-3A	36	90-264 @ 47-63	5.8 x 1.6 x 1.2	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	14.95	13.49
2140568	Mean Well	LPF-40D-12	+12V @ 0-3.34A	40.08	90-305 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	0.5	UL/EN/IP/TUV	29.95	27.95
2103169	Mean Well	LPV-60-12	+12V @ 0-5A	60	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	16.95	15.49
2105308	Mean Well	ELN-60-12†	+12V @ 0-5A	60	90-264 @ 47-63	7.1 x 2.4 x 1.4	IP64	2.0	1.0	UL/CUL/TUV/CSA/CE	25.95	23.49
1918913	Mean Well	PLN-60-12	+12V @ 0-5A	60	90-295 @ 47-63	7.1 x 2.4 x 1.4	IP64	5.0	3.0	UL/CUL/TUV/CE/PFC	32.95	29.95
1918921	Mean Well	CLG-60-12	+12V @ 0-5A	60	90-295 @ 47-63	6.8 x 2.4 x 1.5	IP67	5.0	3.0	CAN/CSA/EN/IP/TUV/UL	36.95	33.95
1585805	Mean Well	CLG-100-12	+12V @ 0-5A	60	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE/PFC	47.95	44.95
2215099	Mean Well	PWM-90-12	+12V @ 0-7.5A	90	90-305 @ 47-63	6.7 X 2.5 X 1.5	IP67	—	—	UL/CUL	47.95	42.95
2148105	Mean Well	HLG-120H-12B	+12V @ 0-10A	120	90-305 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	0.5	UL/CUL/TUV/CE/PFC	59.95	54.95
2105050	Mean Well	CLG-150-12C	+12V @ 0-11A	132	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	1.0	0.5	UL/CUL/TUV/CE/PFC	49.95	44.95
1954877	Mean Well	CLG-150-12A	+12V @ 0-11A	132	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP65	1.0	0.5	UL/TUV/CE	49.95	44.95
2108699	Mean Well	CLG-150-12†	+12V @ 0-11A	132	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	1.0	0.5	UL/CUL/TUV/CE/PFC	49.95	44.95
2137609	Mean Well	HLG-150H-12A	+12V @ 0-12.5A	150	90-305 @ 47-63	9.0 x 2.7 x 1.5	IP65	2.0	0.5	UL/CSA/EN/IP/TUV	65.95	59.95
2147911	Mean Well	HLG-150H-12	+12V @ 0-12.5A	150	90-305 @ 47-63	9.0 x 2.7 x 1.5	IP67	2.0	0.5	UL/CSA/EN/IP/TUV	65.95	59.95
2102158	Mean Well	HLG-240H-12A	+12V @ 0-16A	192	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP65	2.0	0.5	UL/TUV/EN/IP	79.95	72.95
2141780	Mean Well	HLG-320H-12A	+12V @ 0-22A	264	90-305 @ 47-63	9.9 x 3.5 x 1.7	IP65	2.0	0.5	UL/CUL/TUV/CB/CE/PFC	114.95	104.95
2141878	Mean Well	HLG-320H-12B	+12V @ 0-22A	264	90-305 @ 47-63	8.9 x 3.5 x 1.7	IP67	2.0	0.5	UL/CUL/TUV/CB/CE	114.95	104.95
2142150	Mean Well	APC-16-350	+12-48V @ 0-0.35A	16.8	90-264 @ 47-63	3.0 x 1.6 x 1.1	—	3.0	1.0	TUV/EN/UL	7.95	7.19
2215161	Mean Well	OWA-90U-24	+14.4-24V @ 0-3.75A	90	90-264 @ 47-63	6.7 X 2.5 X 1.5	IP67	0.5	0.5	UL/CUL	43.95	38.95
2215030	Mean Well	NPF-90-24	+14.4-24V @ 0-3.75A	90	90-305 @ 47-63	6.7 x 2.5 x 1.5	IP67	0.5	0.5	UL/CUL/CB/CE/ENC	44.95	40.95
2214942	Mean Well	NPF-90D-24	+14.4-24V @ 0-3.75A	90	90-305 @ 47-63	6.7 x 2.5 x 1.5	IP67	0.5	0.5	UL/CUL/CB/CE/ENC	46.95	42.95
2215187	Mean Well	OWA-90U-36	+21.6-36V @ 0-2.5A	90	90-264 @ 47-63	6.7 x 2.5 x 1.5	IP67	0.5	0.5	UL/CUL/FCC	43.95	38.95
2142088	Mean Well	APV-12-24	+24V @ 0-0.5A	12	90-264 @ 47-63	3.0 x 1.6 x 1.1	—	2.0	1.0	TUV/EN/UL	6.59	5.95
2122440	Mean Well	PLN-20-24	+24V @ 0-0.8A	19.2	90-277 @ 47-63	5.8 x 1.5 x 1.1	IP64	10.0	3.0	UL/TUV/CB/CE/PFC	18.95	16.95
2102617	Mean Well	LPV-20-24	+24V @ 0-0.84A	20.2	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/CUL/CE	10.49	9.49
2164092	Mean Well	APV-25-24	+24V @ 0-1.05A	25.2	90-264 @ 47-63	3.3 x 2.2 x 1.2	—	2.0	1.0	EN/UL	10.95	9.95

*Primary output † Dimmable options

Continued on next page

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

LED Enclosed Power Supplies (Continued)

★Web Code: LPP

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power (W)	Input Voltage (VAC @ Hz)	Size (L" x W" x H")	Enclosure Rating	Load Reg. (±%)*	Line Reg. (±%)*	Certification	Pricing 1	Pricing 10
2164148	Mean Well	APV-35-24	+24V @ 0-1.5A	36	90-264 @ 47-63	3.3 x 2.2 x 1.2	—	2.0	1.0	EN/UL	$11.95	$10.95
2102799	Mean Well	LPV-35-24	+24V @ 0-1.5A	36	90-264 @ 47-63	5.8 x 1.6 x 1.2	IP67	2.0	1.0	UL/CUL/TUV/CE	15.95	14.49
2123004	Mean Well	PLN-45-24	+24V @ 0-1.9A	45.6	90-295 @ 47-63	7.1 x 2.4 x 1.4	IP64	5.0	3.0	UL/TUV/EN/CAN/CSA/IP	24.95	22.49
2102801	Mean Well	LPV-60-24	+24V @ 0-2.5A	60	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	UL/CUL/TUV/CE	16.95	15.49
2105252	Mean Well	ELN-60-24	+24V @ 0-2.5A	60	90-264 @ 47-63	7.1 x 2.4 x 1.4	IP64	2.0	1.0	UL/CUL/TUV/CSA/CE	25.95	23.49
2140681	Mean Well	LPF-60-24	+24V @ 0-2.5A	60	90-305 @ 47-63	6.4 x 1.7 x 1.3	IP67	0.5	0.5	UL/EN/IP/TUV	29.95	27.95
1919027	Mean Well	CLG-60-24	+24V @ 0-2.5A	60	90-295 @ 47-63	7.7 x 2.4 x 1.5	IP67	5.0	3.0	UL/CUL/TUV/CE	36.95	33.95
2140939	Mean Well	LPF-90D-24	+24V @ 0-3.75A	90	90-305 @ 47-63	6.3 x 2.4 x 1.4	IP67	0.5	0.5	UL/EN/IP/TUV	46.95	42.95
2215101	Mean Well	PWM-90-24	+24V @ 0-3.75A	90	180-305 @ 47-63	6.7 x 2.5 x 1.5	IP67	—	—	UL/CUL/CB/CE/ENC	47.95	43.95
2103871	Mean Well	PLC-100-24	+24V @ 0-4A	96	90-264 @ 47-63	7.9 x 2.7 x 1.4	—	2.0	1.0	UL/CUL/TUV/CSA/CE/PFC	42.95	38.95
1585872	Mean Well	CLG-100-24	+24V @ 0-4A	96	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	1.0	UL/CUL/TUV/CE/PFC	47.95	44.95
2147971	Mean Well	HLG-150H-24	+24V @ 0-6.3A	151.2	90-305 @ 47-63	9.0 x 2.7 x 1.5	IP67	0.5	0.5	UL/CSA/EN/IP/TUV	64.95	58.95
2103433	Mean Well	CLG-150-24	+24V @ 0-6.3A	151.2	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	0.5	0.5	UL/CUL/TUV/CE/PFC	48.95	45.95
1954885	Mean Well	CLG-150-24A	+24V @ 0-6.3A	151.2	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP65	1.0	0.5	UL/TUV/CE	48.95	45.95
2215275	Mean Well	LPV-150-24	+24V @ 0-6.3A	151.2	180-305 @ 47-63	7.5 x 2.5 x 1.5	IP67	2	1	UL/CUL/CE	39.95	36.95
2136702	Mean Well	HLG-185H-24A	+24V @ 0-7.8A	187.2	90-305 @ 47-63	9.0 x 2.7 x 1.5	IP65	0.5	0.5	UL/CULus/TUV/CE/IP	69.95	63.95
2136737	Mean Well	HLG-185H-24B	+24V @ 0-7.8A	187.2	90-305 @ 47-63	9.0 x 2.7 x 1.5	IP67	0.5	0.5	UL/CULus/TUV/CE/IP	69.95	63.95
2102174	Mean Well	HLG-240H-24A	+24V @ 0-10A	240	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP65	0.5	0.5	UL/CUL/TUV/CE/PFC	77.95	69.95
2115127	Mean Well	HLG-240H-24B	+24V @ 0-10A	240	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP67	0.5	0.5	UL/CUL/TUV/CE/PFC	77.95	69.95
2141907	Mean Well	HLG-320H-24B	+24V @ 0-10A	240	90-305 @ 47-63	8.9 x 3.5 x 1.7	IP67	0.5	0.5	UL/CUL/TUV/CB/CE	114.95	104.95
2147903	Mean Well	HLG-320H-24	+24V @ 0-13.3A	319.2	90-305 @ 47-63	9.9 x 3.5 x 1.7	IP67	0.5	0.5	UL/CUL/TUV/CB/CE/PFC	114.95	104.95
2140998	Mean Well	PCD-16-350A	+24-48V @ 0-0.35A	16.8	90-135 @ 47-63	3.3 x 2.2 x 1.2	—	—	—	UL/CSA/EN/IP/TUV	17.95	15.95
2215195	Mean Well	OWA-90U-42	+25.2-42V @ 0-2.15A	90	90-261 @ 47-63	6.7 x 2.5 x 1.5	IP67	0.5	0.5	UL/CUL/FCC	43.95	38.95
2215072	Mean Well	NPF-90-48	+28.8-48V @ 0-1.88A	90	90-305 @ 47-63	6.7 x 2.5 x 1.5	IP67	0.5	0.5	UL/CUL/CB/CE/ENC	44.95	40.95
2214985	Mean Well	NPF-90D-48	+28.8-48V @ 0-1.88A	90	90-305 @ 47-63	6.7 x 2.5 x 1.5	IP67	0.5	0.5	UL/CUL/CB/CE/ENC	46.95	42.95
2215208	Mean Well	OWA-90U-48	+28.8-48V @ 0-1.88A	90.24	90-264 @ 47-63	6.7 x 2.5 x 1.5	IP67	0.5	0.5	UL/CUL	43.95	38.95
2148009	Mean Well	HLG-150-30B**	+30V @ 0-5A	150	90-277 @ 50-60	8.7 x 2.7 x 1.5	IP67	0.5	0.5	UL/TUV/CE/PFC	64.95	58.95
2215216	Mean Well	OWA-90U-54	+32.4-54V @ 0-1.67A	90.18	90-264 @ 47-63	6.7 x 2.5 x 1.5	IP67	0.5	0.5	UL/CUL	43.95	38.95
2140859	Mean Well	LPF-90-24	+34V @ 0-3.75A	90	90-305 @ 47-63	6.3 x 2.4 x 1.4	IP67	0.5	0.5	UL/EN/IP/TUV	42.95	38.95
2165888	Mean Well	LPF-25D-36	+36V @ 0.7A	25.2	90-305 @ 47-63	5.8 x 1.6 x 1.3	IP67	0.5	0.5	UL/CSA/EN/IP/TUV	26.95	24.95
2102625	Mean Well	LPV-60-36	+36V @ 0-1.67A	60	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	CAN/CSA/EN/IP/TUV/UL	16.95	15.49
1918892	Mean Well	PLN-100-48	+36-48V @ 0-2A	96	90-264 @ 47-63	7.9 x 2.8 x 1.4	IP64	2.0	1.0	CAN/CSA/EN/IP/TUV/UL	44.95	40.95
2148025	Mean Well	HLG-150H-36B	+36V @ 0-4.2A	151.2	90-305 @ 47-63	9.0 x 2.7 x 1.5	IP67	0.5	0.5	UL/CUL/TUV/CE/PFC	65.95	59.95
2101850	Mean Well	HLG-240H-36A	+36V @ 0-6.7A	241.2	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP65	0.5	0.5	UL/TUV/EN/IP	79.95	72.95
2141106	Mean Well	PCD-25-1400A	+40-58V @ 0-0.35A	20.3	90-135 @ 47-63	3.3 x 2.2 x 1.2	—	—	—	UL/CSA/EN/IP/TUV	17.95	15.95
2140710	Mean Well	LPF-60-42	+42V @ 0-1.43A	60.06	90-305 @ 47-63	6.4 x 1.7 x 1.3	IP67	0.5	0.5	UL/EN/IP/TUV	29.95	27.95
2101121	Mean Well	LPC-20-350	+48V @ 0-0.35A	16.8	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/CUL	11.95	10.95
2102633	Mean Well	LPV-60-48	+48V @ 0-1.25A	60	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2	1	CAN/CSA/EN/IP/TUV/UL	16.95	15.49
2210773	Mean Well	LPF-60D-48.	+48V @ 0-1.25A	60	90-277 @ 47-63	6.4 x 1.7 x 1.3	IP67	0.5	0.5	UL/CUL/TUV/CB/CE	29.95	26.95
2100591	Mean Well	PLN-60-48	+48V @ 0-1.3A	62.5	90-295 @ 47-63	7.1 x 2.4 x 1.4	IP64	5.0	3.0	UL/CUL/TUV/CSA/CE/PFC	29.95	27.95
2215128	Mean Well	PWM-90-48	+48V @ 0-1.88A	90.24	90-305 @ 47-63	6.7 x 2.5 x 1.5	IP67	—	—	UL/CUL	47.95	43.95
2215291	Mean Well	LPV-150-48	+48V @ 0-3.2A	153.6	180-305 @ 47-63	7.5 x 2.5 x 1.5	IP67	2	1	UL/CUL/CE	39.95	36.95
2109042	Mean Well	HLG-240H-48A	+48V @ 0-5A	240	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP65	0.5	0.5	UL/TUV/EN/IP	79.95	72.95

*Primary output **Dimmable

Mounting Brackets & Accessories for Mean Well Enclosed Switching AC-to-DC Power Supplies

All brackets use metric screws: 2-F3 x 6, 2-F4 x 6, 2-T3 x 6, 2-T4 x 6 and 8-T4 x 6 (not included)

★Web Code: MBM

Part No.	Mfr. P/N	For Models	1	10
222122	DRL-01	S-25/40, RS-25/35	$.99	$.89
222131	DRL-02	S-50/60/100/150, SP-100/150/200, D-120	1.25	1.09
222148	DRL-03	S-240/320, SP-320	1.49	1.25
222165	DRP-02	S-15/25, SP-75/100/150/200	1.49	1.35
222173	DRP-03	All Models	1.49	1.25
222182	MHS012	S-320/350, SP-100/150/200/320	.49	.39
2172666	2026.0	DR, DRH, DRP, DRT, MDR, TDR	5.95	4.95
248736	2094.0	DR, DRH, DRP, DRT, MDR	8.95	7.95
2150379	TBC-07	D/ID, NED, RD, NES, RS, T, S, SD, HRP, SC	.35	.29



222122 4.35"L x 1.73"W x 2.52"H
222148 7.875"L x 2.48"W x 1.80"H

222165
3.2"L x 2.0"W x 0.3"H

222182
.767"L x .60"W x .625"H

2172666 (Unslotted)
DIN Mounting Rail
Length: 1 meter



248736 (Slotted)
DIN Mounting Rail
Length: 1 meter

2150379
2.25"L x 0.4"W

Mating Connector

103588 $1.70/10
Spade Solderless Terminal

Crimp Tool



72996 $24.95
Solderless Terminal Crimp Tool

DIN-Rail Switching Power Supplies

★Web Code: RBY

- Short-circuit, overload, overvoltage protection
- Low cost, high reliability
- 100% full-load burn-in test
- For DIN mounting rail, see page 22

UL-508

- For DIN-Rail terminal blocks
- Universal AC input range
- Soft-start circuit, limiting AC surge current
- Rail not included

Fig. 1

Fig. 2

Fig. 3


Fig. 4

Fig. 5

Fig. 6

Fig. 7

Fig. 8

Fig. 9

Fig. 10

Fig. 11

Fig. 12

Fig. 13

Fig. 14

Fig. 15

Part No.	Mfr. Part No.	Fig.	Output Volts @ Curr.	Pwr (W)	Input Voltage (VAC @ Hz/VDC)	Input Current @ Max Load	Size (L" x W" x H")	Wt. (lbs.)	Certification	1	10
2103978	MDR-10-5	2	5VDC @ 2A	10	88-264 @ 47-63	0.33A(115V)/0.21A(230V)	3.5 x 0.9 x 3.9	0.4	UL/CUL/TUV/CB/CE	$13.95	$12.49
2101243	DR-15-5	9	5VDC @ 2.4A	12	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	1.0 x 3.7 x 2.2	0.2	UL/CUL/TUV/CE	13.95	12.49
1943300	MDR-20-5	2	5VDC @ 3A	15	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	14.95	13.49
373174	DR-30-5	1	5VDC @ 3A	15	85-264 @ 47-63	1.1A(115V) / 0.6A(230V)	3.1 x 3.7 x 2.2	0.5	UL/CUL/TUV/CE	16.95	15.49
212303	DR-4505	3	5VDC @ 5A	25	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.9	UL/CUL/TUV/CE	19.95	17.95
1943393	MDR-40-5	4	5VDC @ 6A	30	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	20.95	18.95
1943449	MDR-60-5	4	5VDC @ 10A	50	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	21.95	19.95
1952978	MDR-10-12	2	12VDC @ 0.84A	10	85-264 @ 47-63/120-370	0.33A(155V)/0.21A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	13.95	12.49
2094952	DR-15-12	9	12VDC @ 1.25A	15	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	3.7 x 1.0 x 2.2	0.2	UL/CUL/TUV/CE	13.95	12.49
1943334	MDR-20-12	2	12VDC @ 1.67A	20	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	14.95	13.49
373182	DR-30-12	1	12VDC @ 2A	24	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	UL/CUL/TUV/CE	16.95	15.49
1943406	MDR-40-12	4	12VDC @ 3.33A	40	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	20.95	18.95
192699	DR-4512	3	12VDC @ 3.5A	42	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.7	UL/CUL/TUV/CE	19.95	17.95
373230	DR-60-12	1	12VDC @ 4.5A	54	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	UL/CUL/TUV/CE	23.95	21.95
1943457	MDR-60-12	4	12VDC @ 5A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	21.95	19.95
212291	DR-75-12	6	12VDC @ 6.3A	75	85-264 @ 47-63/120-370	2.0A(115V)/1.2A(230V)	3.9 x 2.1 x 4.9	1.2	UL/CUL/TUV/CE	31.95	28.95
1943511	DR-100-12	1	12VDC @ 7.5A	90	85-264 @ 47-63/124-370	3.0A(115V)/1.6A(230V)	3.9 x 3.7 x 2.2	0.8	UL/CUL/TUV/CE	31.95	28.95
1943481	MDR-100-12	5	12VDC @ 7.5A	90	85-264 @ 47-63/120-370	1.3A(155V)/0.8A(230V)	3.9 x 2.2 x 3.5	0.9	UL/CUL/TUV/CE	39.95	35.95
212274	DR-120-12	7	12VDC @ 10A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	39.95	35.95
2099366	SDR-120-12†	8	12VDC @ 10A	120	88-264 @ 47-63/124-370	1.4A(115V)/10.7A(230V)	4.5 x 1.6 x 4.9	1.5	UL/CUL/TUV/CE	64.95	58.95
2123047	WDR-120-12	14	12VDC @ 10A	120	180-550 @ 47-63	0.55A(400V)/1.2A(230V)	4.5 x 1.6 x 4.9	0.2	UL/CUL/CB/CE	64.95	58.95
2101391	DR-15-15	9	15VDC @ 1A	15	88-264 @ 47-63	0.88A(115V)/0.48A(230V)	3.7 x 1.0 x 2.2	0.2	UL/CUL/TUV/CB/CE	13.95	12.49
1943342	MDR-20-15	2	15VDC @ 1.24A	20	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	14.95	13.49
373238	DR-60-15	1	15VDC @ 4A	60	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	UL/CUL/TUV/CE	21.95	20.95
1952986	MDR-10-24	2	24VDC @ 0.42A	10	85-264 @ 47-63/120-370	0.33A(115V)/0.21A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	13.95	12.49
2100873	DR-15-24	9	24VDC @ 0.63A	15.2	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	2.2 x 1.0 x 3.7	0.2	UL/CUL/TUV/CE	13.95	12.49
1943385	MDR-20-24	2	24VDC @ 1A	24	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	14.95	13.49
373203	DR-30-24	1	24VDC @ 1.5A	36	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	UL/CUL/TUV/CE	16.95	15.49
1943422	MDR-40-24	4	24VDC @ 1.7A	40.8	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	20.95	18.95
192681	DR-4524	3	24VDC @ 2A	48	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.7	UL/CUL/TUV/CE	19.95	17.95
1943465	MDR-60-24	4	24VDC @ 2.5A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	21.95	20.95
373246	DR-60-24	1	24VDC @ 2.5A	60	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	UL/CUL/TUV/CE	21.95	20.95
212282	DR-75-24	6	24VDC @ 3.2A	75	85-264 @ 47-63/120-370	2.0A(115V)/1.2A(230V)	3.9 x 2.1 x 4.9	1.2	UL/CUL/TUV/CE	31.95	28.95
2190320	SDR-75-24	13	24VDC @ 3.2A	76.8	88-264 @ 47-63	1.4A(115V)/0.85A(230V)	4.0 x 1.3 x 4.9	0.4	UL/CUL/TUV/CE	36.95	33.95
1943490	MDR-100-24	5	24VDC @ 4A	90	85-264 @ 47-63/120-370	1.3A(155V)/0.8A(230V)	3.9 x 2.2 x 3.5	0.9	UL/CUL/TUV/CE	39.95	35.95
1943537	DR-100-24	1	24VDC @ 4.2A	100	88-264 @ 47-63/124-370	3.0A(115V)/1.6A(230V)	2.2 x 3.9 x 3.7	0.8	UL/CUL/TUV/CE	31.95	28.95
212266	DR-120-24	7	24VDC @ 5A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	39.95	35.95
1953727	DRH-120-24	7	24VDC @ 5A	120	340-550 @ 47-63/480-780	0.65A(400V)/0.6A(500V)	3.9 x 2.6 x 4.9	1.7	UL/CE	59.95	54.95
2099374	SDR-120-24†	8	24VDC @ 5A	120	88-264 @ 47-63/124-370	1.4A(115V)/10.7A(230V)	4.5 x 1.6 x 4.9	1.5	UL/CUL/TUV/CE	64.95	58.95
2123055	WDR-120-24	14	24VDC @ 5A	120	180-550 @ 47-63	0.55A(400V)/1.2A(230V)	4.5 x 1.6 x 4.9	0.4	UL/CUL/CB/CE	64.95	58.95
221892	DRP-240-24†	10	24VDC @ 10A	240	85-264 @ 47-63/120-370	2.8A(115V)/1.4A(230V)	3.9 x 4.9 x 4.9	2.4	UL/CUL/TUV/CE	59.95	53.95
373123	DRT-240-24	10	24VDC @ 10A	240	3-phase 340-550 @ 47-63/480-780	0.95A(400V)/0.75A(500V)	3.9 x 4.9 x 4.9	2.9	UL/CUL/TUV/CE	74.95	67.95
2081086	SDR-240-24†	8	24VDC @ 10A	240	88-264 @ 47-63/124-370	2.6A(115V)/1.3A(230V)	2.5 x 4.9 x 4.5	2.5	UL/CUL/TUV/CE	104.95	94.95
2150096	WDR-240-24	15	24VDC @ 10A	240	180-264 @ 47-63	1A(400V)/ 2A(230V)	4.5 x 2.5 x 4.9	2.2	UL/CUL/CB/CE	134.95	119.95
252663	DRP-480-24†	11	24VDC @ 20A	480	180-264 @ 47-63/250-370	4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	104.95	94.95
295938	DRP-480S-24†	11	24VDC @ 20A	480	90-132/180-264* @ 47-63/254-370	11.0A(115V)/4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	119.95	109.95
372577	DRT-480-24	11	24VDC @ 20A	480	3-phase 340-550 @ 47-63/480-780	1.7A(400V)/1.3(500V)	8.9 x 5.0 x 3.9	5.5	UL/CUL/TUV/CE	124.95	114.95
2094944	SDR-480-24†	12	24VDC @ 20A	480	88-264 @ 47-63/124-370	2.6A(115V)/1.3A(230V)	4.9 x 3.4 x 5.0	4.9	UL/CUL/TUV/CE	159.95	144.95
373131	DRT-960-24	11	24VDC @ 40A	960	340-550 @ 47-63	2A(400V)/1.6A(500V)	10.9 x 3.9 x 4.9	7.3	UL/CUL/TUV/CE	229.95	204.95
1943431	MDR-40-48	2	48VDC @ 0.83A	40	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CB/TUV/CE/CUL	20.95	18.95
1943473	MDR-60-48	4	48VDC @ 1.25A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	21.95	19.95
221866	DR-75-48	6	48VDC @ 1.6A	75	85-264 @ 47-63	2A(115V)/ 1.2A(230V)	3.9 x 2.2 x 4.9	1.7	UL/CUL/TUV/CB/CE	31.95	28.95
221904	DR-120-48	7	48VDC @ 2.5A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	39.95	35.95
2107338	SDR-120-48	8	48VDC @ 2.5A	120	88-264 @ 47-63	1.4A(115V)/0.7A(230V)	4.9 x 1.6 x 4.5	1.5	UL/CUL/TUV/CB/CE	64.95	58.95
221883	DRP-240-48†	10	48VDC @ 5A	240	85-264 @ 47-63/120-370	3.5A(115V)/1.8A(230V)	3.9 x 4.9 x 4.9	2.4	UL/CUL/TUV/CE	59.95	53.95

*Switch selectable †With Power Factor Correction

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

DIN-Rail Switching Power Supplies (Continued)

★Web Code: RBY

Part No.	Mfr. Part No.	Fig.	Output Volts @ Curr.	Pwr (W)	Input Voltage (VAC @ Hz/VDC)	Input Current @ Max Load	Size (L" x W" x H")	Wt. (lbs.)	Certification	1	10
2094936	SDR-240-48†	8	48VDC @ 5A	240	88-264 @ 47-63/120-370	2.6A(115V)/1.3A(350V)	2.5 x 4.9 x 4.5	2.5	UL/CUL/TUV/CE	$104.95	$94.95
252655	DRP-480-48†	11	48VDC @ 10A	480	180-264 @ 47-63/250-370	4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	104.95	94.95
301306	DRP-480S-48†	11	48VDC @ 10A	480	90-132/180-264* @ 47-63/254-370	11.0A(115V)/4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	119.95	109.95
2107346	SDR-480-48	12	48VDC @ 10A	480	90-264 @ 47-63	5A(115V)/2.5A(230V)	4.9 x 3.4 x 5.1	3.5	UL/CUL/TUV/CB/CE	159.95	144.95

*Switch selectable †With Power Factor Correction

40A DC DIN-Rail UPS Module & 20A Power Supply Redundancy Module

★Web Code: RBY

Part No.	Mfr. Part No.	Description	DC Input/DC BUS	Output Voltage @ Current	Charge Current	Certification	1	10
2103273	DR-UPS40	Battery controller for UPS	24-29V @ 40A	21-29VDC @ 0-40A	2A	CE	$42.95	$38.95
2105009	DR-RDN20	2-input redundancy module	21-28V @ 20A	30V @ 20A	—	CE	25.95	23.49

2103273 (Rail not included)

15 to 504-Watt Enclosed Converters

SD-150

- 2:1 wide input range • 100% burn-in test • Working temp.: -10˚C to +60˚C • Protection: short-circuit, overload and overvoltage

SD-15 Series • Built-in EMI filter, low ripple noise • One-year warranty

SD-25/SD-50/SD-150 Series • Isolation voltage: 1500VDC • Built-in EMI filter, low ripple noise • One-year warranty

SD-350 Series • Isolation volt.: 1500VDC • Forced air cooling by built-in DC fan • Two-year warranty

SD-200 Series • Isolation volt.: 1500VDC • Cooling by free air convection • Fixed switching freq @ 83kHz • One-year warranty

• Wide 4:1 ~ 2:1 SC input range • Forced air cooling by built-in DC fan with fan speed control function • Three-year warranty

★Web Code: UBC

Part No.	Mfr. Part No.	Input Range	Output Voltage @ Current	Output Power (W)	Size (L" x W" x H")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Certification	Pricing 1	Pricing 10
1953778	SD-15A-5	9.2-18V	+5V @ 3.0A	15	3.1 x 2.0 x 1.1	5	0.5	0.5	100	CE	$12.95	$11.49
1953786	SD-15B-5	18-36V	+5V @ 3.0A	15	3.1 x 2.0 x 1.1	5	0.5	0.5	100	CE	12.95	11.49
175662	SD-25A-5	9-18V	+5V @ 5.0A	25	3.9 x 3.8 x 1.4	5	0.5	0.5	100	CE	21.95	19.95
212549	SD-50A-5	9-18V	+5V @ 10A	50	6.3 x 3.8 x 1.5	5	0.5	0.5	100	CE	27.95	25.95
1953823	SD-15B-12	18-36V	+12V @ 1.25A	15	3.1 x 2.0 x 1.1	5	0.3	0.3	120	CE	12.95	11.49
1953840	SD-15C-12	36-72V	+12V @ 1.25A	15	3.1 x 2.0 x 1.1	5	0.3	0.3	120	CE	12.95	11.49
175805	SD-25A-12	9-18V	+12V @ 2.1A	25.2	3.9 x 3.8 x 1.4	5	0.3	0.3	120	CE	21.95	19.95
1537483	SD-50A-12	9.2-18V	+12V @ 4.2A	50.1	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	27.95	25.95
212531	SD-50B-12	19-36V	+12V @ 4.2A	50.4	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	27.95	25.95
212506	SD-50C-12	36-72V	+12V @ 4.2A	50.4	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	27.95	25.95
217270	SD-150B-12	19-36V	+12V @ 12.5A	150	7.8 x 4.3 x 2.0	7	0.5	0.5	120	CE	46.95	42.95
1953920	SD-200C-12	36-72V	+12V @ 16.7A	200.4	8.5 x 4.5 x 2.0	9	0.5	1.0	120	CE	79.95	72.95
1954033	SD-500L-12	19-72V	+12V @ 40A	480	8.5 x 4.5 x 2.0	7	0.5	0.5	150	CE	139.95	124.95
175813	SD-25A-24	9-18V	+24V @ 1.1A	26.4	3.9 x 3.8 x 1.4	5	0.2	0.2	150	CE	21.95	19.95
2107266	SD-50A-24	9.2-18V	+24V @ 2.1A	50.4	6.3 x 3.8 x 1.5	5	0.2	0.2	150	CE	27.95	25.95
212514	SD-50B-24	19-36V	+24V @ 2.1A	50.4	6.3 x 3.8 x 1.5	5	0.2	0.2	150	CE	27.95	25.95
2107039	SD-100C-24	36-72V	+24V @ 4.2A	100.8	7.8 x 3.9 x 1.6	7	0.2	0.2	150	CE	34.95	31.95
2107098	SD-150C-24	36-72V	+24V @ 6.3A	151.2	7.8 x 4.3 x 2.0	7	0.3	0.3	150	CE	46.95	42.95
1953954	SD-200B-24	19-36V	+24V @ 8.4A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	CE	79.95	72.95
1953971	SD-350B-24	19-36V	+24V @ 14.6A	350.4	8.5 x 4.5 x 2.0	9	0.2	1.0	150	CE	79.95	74.95
1953911	SD-200B-48	19-36V	+48V @ 4.2A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	CE	79.95	72.95
1953989	SD-350B-48	19-36V	+48V @ 7.3A	350.4	8.5 x 4.5 x 2.0	9	0.3	1.0	120	CE	94.95	84.95

Encapsulated DC-to-DC Converters

★Web Code: NAX

SLW05

SKE10

DKE10

- 1000VDC I/O isolation • Shield metal case • Cooling by free air convection
- Short-circuit/overload protection • 2:1 wide input range • One-year warranty

Part No.	Mfr. Part No.	Input Range	Output Voltage @ Current	Output Pwr (W)	Size (L" x W" x H")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Certification	Pricing 1	Pricing 10
1953313	SCW05B-05*	18-36V	+5V @ 1A	5	1.25 x 0.8 x 0.48	8	0.5	0.5	50	CE	$9.49	$8.49
216937	SLW05B-05*	18-36V	+5V @ 1A	5	2.0 x 1.0 x 0.44	5	1.0	0.2	100	CE	10.95	9.95
213234	SLW05C-05*	36-72V	+5V @ 1A	5	2.0 x 1.0 x 0.44	5	1.0	0.2	100	CE	12.95	11.95
216962	SKE10A-05*	9-18V	+5V @ 2A	10	2.0 x 1.0 x 0.44	5	0.3	1.0	50	CE	18.95	16.95
155716	SKE15A-05*	9-18V	+5V @ 3A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	50	CE	18.95	16.95
155708	SKE15A-12*	9-18V	+12V @ 1.25A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	60	CE	16.49	15.49
155695	SKE15A-24*	9-18V	+24V @ 0.625A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	80	CE	18.95	16.95
155919	DCW03A-05**	9-18V	±5V @ 0.3A	3	1.25 x 0.8 x 0.48	10	1.0	0.5	100	CE	9.95	8.95
161702	DCW03A-12**	9-18V	±12V @ 0.125A	3	1.25 x 0.8 x 0.48	10	1.0	0.5	100	CE	9.95	8.95
217092	DKE10A-12**	9-18V	±12V @ 0.42A	10	2.0 x 1.0 x 0.44	5	0.3	0.5	60	CE	18.95	17.49
217112	DKE10A-15**	9-18V	±15V @ 0.333A	10	2.0 x 1.0 x 0.44	5	0.3	0.5	60	CE	18.95	17.49

*Single output **Double output

LRS-200/350 Series Enclosed Single Output Switching Power Supplies

Enclosed Power Supplies on pages 17-20

The LRS 200 and 350 series replaces the popular NE and SE series respectively, while still providing the great features, but with higher efficiency and longer life. These can also handle a higher operating temperature. Get another great product from Mean Well today!

- AC input range selectable by switch
- Withstand 300VAC surge input for 5 seconds and 5G vibration test
- Protections: short circuit, over load, over voltage, over temperature
- LED indicator for power on and 1U low profile
- 100% full load burn in test
- LRS-350: Built in DC fan with ON-OFF control
- LRS-200: Cooled by free air convection
- Approvals: UL/CUL
- 3-year warranty

NEW MARKED IN PINK

★Web Code: EPS

Part No.	Mfr. Part No.	Output Voltage @ Current	Output Power (W)	Efficiency (%)	Pricing 1	Pricing 10
2219727	LRS-200-12	12V @ 17A	204	87.5	$36.95	$33.95
2219807	LRS-350-12	12V @ 29A	348	85	43.95	39.95
2219743	LRS-200-24	24V @ 8.8A	211.2	89.5	36.95	33.95
2219823	LRS-350-24	24V @ 14.6A	350.4	88	43.95	39.95
2219760	LRS-200-48	48V @ 4.4A	211.2	90	36.95	33.95
2219840	LRS-350-48	48V @ 7.3A	350.4	89	43.95	39.95

LRS-200

LRS-350

RSP-320 Series Enclosed Single Output Switching Power Supplies

Enclosed Power Supplies on pages 17-20

The RSP Series is a great successor to the widely used SP series that still provides a built-in active PFC function and DC fan for cooling, while including a higher efficiency and slimmer design. The fan also has a control function compared to its predecessor. If you are looking for a power supply with PFC, this series will definitely satisfy your needs.

- 1U low profile 30mm with LED indicator for power on
- Protections: short circuit, over load, over voltage, over temperature
- Universal AC input/full range
- Forced air cooling by built-in DC fan with fan speed control function
- Built in active PFC function with high efficiency up to 90%
- 3-year warranty

★Web Code: EPS

NEW MARKED IN PINK

Part No.	Mfr. Part No.	Output Voltage @ Current	Output Power (W)	Efficiency (%)	Pricing 1	Pricing 10
2172084	RSP-320-12	12V @ 26.7A	320.4	88	$57.95	$52.95
2204699	RSP-320-24	24V @ 13.4A	321.6	89	57.95	52.95
2204728	RSP-320-48	48V @ 6.7A	321.6	90	57.95	52.95

RSP-320

AC-to-DC Regulated Switching Wall Adapters

Wall Adapters on pages 2-6

If you need precise rail voltages, these regulated adapters are what you are looking for. Power up your devices by simply plugging them into the wall outlet.

★AC-DC Wall Adapters Web Code: CDZ

★AC-DC Slimline Web Code: CBQ

Part No.	Mfr.	Mfr. Part No.	Voltage @ Current	Power (W)	Output Connector	Size (L" x W" x H")	1	10
2211098	Phihong	PLA05A-050-R	5V @ 1A	5	2.1 x 5.5 mm	2.6 x 1.4 x 1.1	$10.95	$9.95
2188537	CUI	EPAS-101W-05	5V @ 2A*	10	2.5 x 5.5mm R/A	2.4 x 1.7 x 1.0	8.95	7.95
2215734	Arndt Electronics	MT12-Y120100-A1	12V @ 1A*	12	2.1 x 5.5mm	2.7 x 1.5 x 1.3	8.95	7.95
2209166	Arndt Electronics	G1P-650	12V @ 2A	24	2.1 x 5.5mm	3.1 x 2.1 x 1.3	10.49	9.49
2215726	Arndt Electronics	P03WF-120B	12V @ 2.5A	30	2.1 x 5.5 mm	3.0 x 1.4 x 2.0	13.95	12.95
2179391	ReliaPro	PA1024-360HU-PF04	36V @ 0.67A	25	2.5 x 5.5mm	2.7 x 1.8 x 1.3	12.95	11.95

*Slimline

2209166

Power Cords, Cables, Plugs and Cord Adapters

Power Cords on pages 13-14

JAMECO ValuePro DC Cords with Pigtail – 6' length

★Web Code: MFP

- 24 AWG
- Color: black

Part No.	Cross Ref. No.	Fig.	Description (Barrel) ID x OD x L (mm)	1	10	100
2114706	6FT#245.5X1.7	1	Plug, 1.7 x 5.5 x 12	$1.15	$.99	$.89
2210925	DCCORD2.1*	1	Plug, 2.1 x 5.5 x 9.5	2.49	1.95	1.59
2096763	DCCORD2.1	1	Plug, 2.1 x 5.5 x 12	1.59	1.39	1.15
2114600	6FT#245.5X2.1	2	Jack, 2.1 x 5.5 x 12	1.59	1.39	1.15
2096771	DCCORD2.5	1	Plug, 2.5 x 5.5 x 12	1.59	1.39	1.15
2114597	6FT#245.5X2.5	2	Jack, 2.5 x 5.5 x 12	1.59	1.39	1.15

Fig. 1

Fig. 2

*18 AWG wire

JAMECO ValuePro DC Extension Power Cables

Part No.	Cross Ref. No.	Description (Barrel) ID x OD (mm)	Length	AWG	Color	1	10	100
2099147	DCEXTCORD2.1- 3FT	2.1 Female x 2.1 Male	3'	18	Black	$2.25	$1.95	$1.75
2099121	DCEXTCORD2.1- 6FT	2.1 Female x 2.1 Male	6'	18	Black	2.49	2.25	1.95
2099155	DCEXTCORD2.5- 3FT	2.5 Female x 2.5 Male	3'	18	Black	2.25	1.95	1.75
2099139	DCEXTCORD2.5- 6FT	2.5 Female x 2.5 Male	6'	18	Black	2.49	2.25	1.95

JAMECO ValuePro Automobile Fused Power Plugs with Cords

- Accepts .25" x 1.25" fuse

115002: Screw assembly with strain relief (no cord)

124760: 3' cord with pigtail

115002

124760

Part No.	Fuse	1	10	100
115002	5A/250VAC	$2.25	$1.95	$1.75
124760	3A/250VAC	2.49	2.25	1.95

JAMECO ValuePro Power Cord Adapters

2188545: Receptacle IEC plug C14 to Nema 5-15R

2188553: Receptacle CEE 7/7 to Nema 5-15R plug

2188545

2188553

Part No.	Cross Ref. No.	1	10	50
2188545	YL-3215	$3.95	$3.59	$3.29
2188553	YL-2215	3.95	3.59	3.29

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

JAMECO® ELECTRONICS
1355 Shoreway Rd., Belmont, CA 94002-4100

Toll-Free Ordering and Customer Support:
Domestic: 1-800-831-4242 / International: 1-650-592-8097
Domestic Fax: 1-800-237-6948 / International Fax: 1-650-592-2503
Website: http://www.Jameco.com / Email: Info@Jameco.com

PRESORTED STANDARD
U.S. POSTAGE PAID
JAMECO ELECTRONICS

Customer Number

Like our catalog, we have even more products on our website

Scan on your smartphone with a code reader app.

If you would like to unsubscribe from Jameco's catalog please visit www.Jameco.com/CatalogUnsubscribe

Printed in USA

Thousands of Power Products To Choose From

Single Output AC-to-DC Medical Open-Frame Switching Power Supplies

Open-Frame Power Supplies on pages 15-16

*Web Code: OSP

These medical safety approved open-frame power supplies are ultra-compact with 5-volt standby to make sure your medical devices keep powering on.

- Universal AC input/full range • Miniature size • High reliability
- Medical safety approved (2 x MOPP between primary to secondary) • Certifications: UL/CUL/CB/CE
- Short circuit, overload, over voltage, and over temperature protection • 3-year warranty

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Efficiency (%)	1	10
694971	NFM-05-5	5V @ 1A	5	71	$9.49	$8.49
695092	NFM-10-5	5V @ 2A	10	74	10.95	9.95
2106327	RPS-160-5	5V @ 30A	150	85	49.95	44.95
695156	NFM-15-12	12V @ 1.25A	15	78	12.95	11.49
220987	MPS-30-12	12V @ 2.5A	30	75	19.95	17.95
2106335	RPS-60-12	12V @ 5.5A	60	83	16.95	15.49
695164	NFM-15-15	15V @ 1A	15	79	11.95	10.95

694971

2106335

GSM-B Series AC-to-DC Single Output Medical Adapters

*Web Code: WBM

- Universal AC input/full range • Protections: short circuit, over load, over voltage, over temperature • 3-year warranty
- Built-in active PFC function • Fully enclosed plastic case with 2 pole AC inlet • Approvals: UL/CUL/CE/FCC/TUV/CB
- Low leakage current of < 50µA or 100µA • Class II power and LED indicator for power on • 2x MOPP medical safety approved

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Efficiency (%)	1	10
2213991	GSM25B12-P1J*†	12V @ 2.08A	25	86	$13.95	$12.49
2214230	GSM60B12-P1J*	12V @ 5A	60	88	21.95	19.95
2210466	GSM90B12-P1M	12V @ 6.67A	80	88	31.95	28.95
2214281	GSM120B12-R7B	12V @ 8.5A	102	88	49.95	44.95
2214029	GSM25B24-P1J*†	24V @ 1.04A	25	87	13.95	12.49
2214264	GSM60B24-P1J*	24V @ 2.5A	60	90	21.95	19.95
2210491	GSM90B24-P1M	24V @ 3.75A	90	90	31.95	28.95
2214310	GSM120B24-R7B	24V @ 5A	120	90	49.95	44.95

GSM25B

GSM120B

*Does not have PFC †GSM25B does not have over temperature protection

AC-to-DC Unregulated Linear Wall Adapters

Wall Adapters on pages 2-6

*Web Code: UAP

These reliable wall adapter power supplies are just the thing you are looking for if you need to charge your appliances. Just plug it into the wall and connect to your device to have full power in no time.

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Output Connector†	Size (L" x W" x H")	Wt. (lbs.)	1	10
133891	DBU090030	9V @ 0.3A	3	2.1mm x 5.5mm	2.0 x 1.5 x 1.5	0.4	$6.95	$5.95
100853	DCU090050RZ7480	9V @ 0.5A	3	2.1mm x 5.5mm	2.5 x 1.9 x 1.7	0.6	7.95	6.95
102496	DCU120050E8601	12V @ 0.5A	6	2.1mm x 5.5mm	2.5 x 1.9 x 1.6	0.6	7.95	7.29
114825	DCU120050D4740	12V @ 0.5A	6	Stripped & tinned	2.5 x 2.0 x 1.7	0.6	7.95	6.95
129331	MGT-6500SPS	12V @ 0.8A	3	2.1mm x 5.5mm	2.5 x 1.1 x 1.8	0.16	8.95	7.95
100870	DDU120100Z7974	12V @ 1A	12	2.1mm x 5.5mm	2.6 x 2.4 x 1.9	0.9	9.95	8.95
252833	S15AC12012501L5190	12V @ 1.25A	15	2.1mm x 5.5mm	2.9 x 1.3 x 2.2	0.3	13.95	12.95
101291	DDU120150	12V @ 1.5A	18	2.5mm x 5.5mm	3.4 x 2.7 x 2.2	1.5	15.95	14.95
1950497	GQ30-120200-BU	12V @ 2A	24	2.1mm x 5.5mm	2.9 x 1.3 x 1.7	0.4	15.95	14.49

10870

1950497

†Center positive polarity, female (except P/N 114825 – stripped & tinned)

Contact Information

Order Desk
Phone: 1-800-831-4242
Fax: 1-800-237-6948
E-mail: Sales@Jameco.com

Technical Support
Phone: 1-800-831-4242
E-mail: Tech@Jameco.com

Customer Service
Phone: 1-800-536-4316
E-mail: CustService@Jameco.com

Credit Department
Phone: 650-592-8097
Fax: 650-802-1583
E-mail: Credit@Jameco.com

International Order Desk
Phone: 650-592-8097
Fax: 650-592-2503
E-mail: International@Jameco.com

Feedback
E-mail: Feedback@Jameco.com

The Jameco RobotStore
Website: www.RobotStore.com

Club Jameco
Website: www.ClubJameco.com